


MODULAR TERMINAL BLOCKS — TB100-XXP




General.	图示(Pic. shown) : TB100-02P-K02
	Modular terminal Blocks Rated : 600V,150A , 1/0AWG
	Single row , 25.0mm pitch , 02-12 Pole
	Wiring orientation: 180°(wire-to-wire)
	Screw clamp unit: M8.0, 8.0Nm Max

认证 (Approval) :

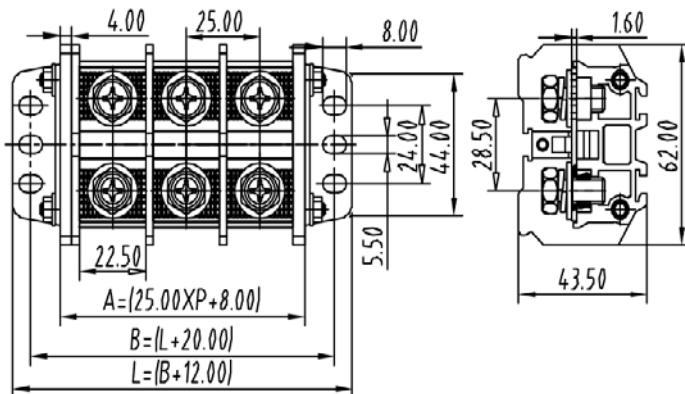

技术参数Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	600V	600V	--	--	--	--
额定电流(Rated current)	150A	150A	--	--	--	--
额定连接容量(Rated connection capacity)	8-1/0AWG Sol&Str			--		
绝缘材料(Insulation Material)	PC V2					
电流承载部件材料和镀层(Material & Plating of Current carrier)	Copper alloy , Ni plated					
接线弹片材料(Material of Clamp spring)	--					
绝缘电阻(Insulation Resistance)	500MΩ or more at DC500V					
耐电压(1分钟)(Withstanding Voltage/1Min)	2500V					
额定冲击电压(Rated surge voltage)	--					
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)	M8.0, 8.0Nm Max					
固定螺丝(Mounting Screw) , 扭矩(torque)	--					
剥线长度(Wire stripping length)	--					
使用温度(Operating temperature)	-40°C up to +125°C					
焊接方式(Soldering recommend)	--					

订购方式(How to order)

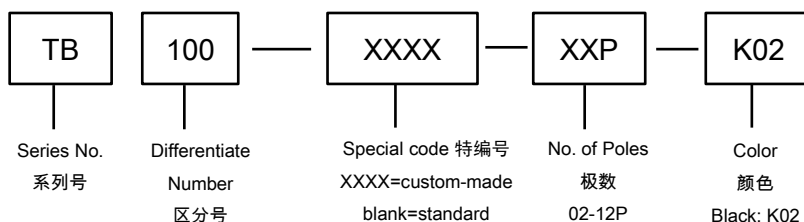

Web:www.china-tianli.com TEL:+86-574-6347-9600,6389-6436

Mail : sale@china-tianli.cn


地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China

■ 配件 ACCESSORIES FOR MODULAR AND RAIL-MOUNTED SERIES



P/N : TBK60

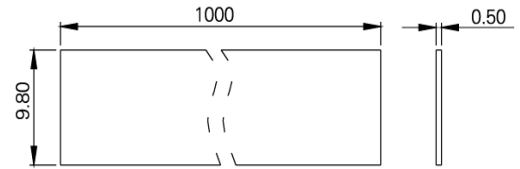

P/N : TB100 COVER

