




Tianli Electrical Machinery (Ningbo) Co., Ltd

ISO9001
ISO14001



REACH

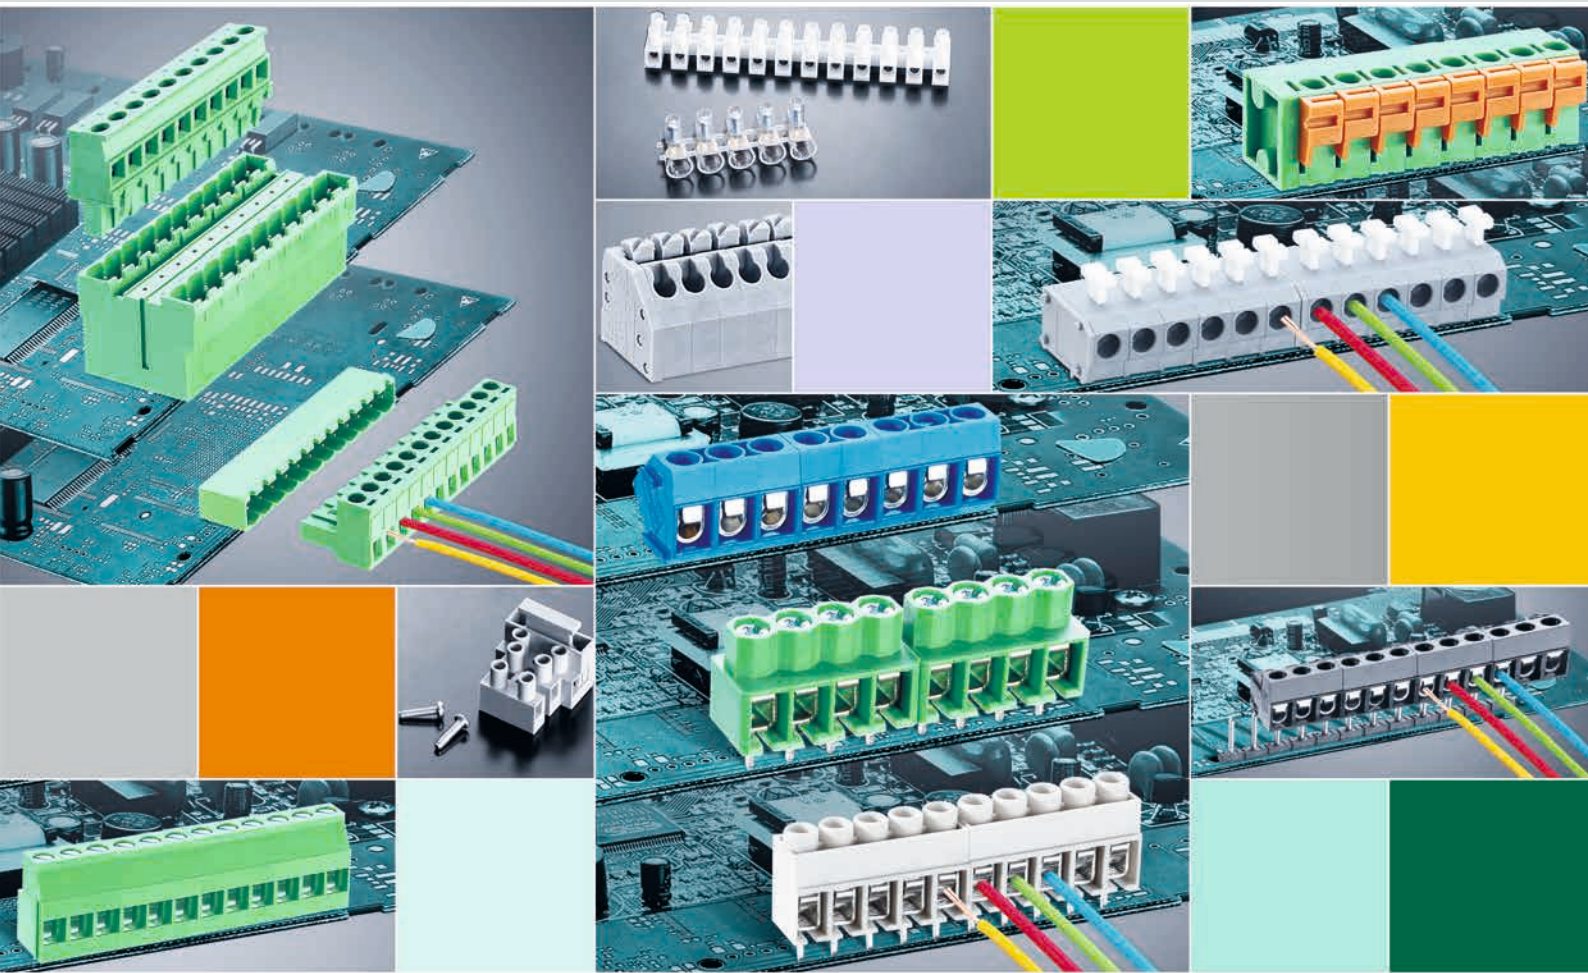

本目录产品规格数据仅供参考，天立对此目录中规格数据作修改，恕不另行通知

The technical data of the products in this catalogue are only for reference, Tianli reserves the rights for specification update or change.

TC-20.08



企业简介 Company profile

天立电机（宁波）有限公司是一家接线端子台的专业生产商，本公司生产的端子台用途广泛，适用于防盗器材、电力电气、灯具镇流器、仪器仪表、工业控制及自动化。

公司已通过 ISO9001:2015 质量体系认证及 ISO14001:2015 环境体系认证。为了能给客户百分之百的满意，公司对模具开发设备、产品注塑冲压设备、全体员工的技能培训有很大的投入。值得庆幸和自豪的是，我们的努力赢得了国内外客户的信赖，我们的产品通过了 UL 和 VDE 认证，产品远销欧美、亚洲各国。天立公司以建成一流企业为宗旨，会一如既往的为客户提供高品质的产品。对客户认真负责，共创繁荣。

Tianli Electrical Machinery (Ningbo) Co., Ltd established in 1998 at Cixi City, which is specialized in terminal blocks developing and manufacturing. The products are widely used in the Security system,Lighting,Automation control,Home appliance and so on, which covered both of electronic and electrical application.

With geographical advantages, Tianli is located at the central region of the Hangzhou Bay Rim economic circle among Shanghai, Hangzhou and Ningbo. All these three cities can access just within one or two hours drive.

The completed processed capability, this is the one of major strength from CAD design, tooling making, injection molding, stamping and assembling all carried out in house.





Regarding the quality management, we granted ISO9001:2015 and ISO14001:2015, and have good will and capable to improving the quality management system continually. All products are certificated by UL, CSA, VDE, CE, CQC, and RoHS and so on. That is reason why our products have been adopted by branded vendors over the world.

Furthermore, our lead time is flexible. We can help to make stock for the customer based on their forecast. When customer have the urgent demand, we can also make internal adjustment to support them.


Our advantages are not just the best quality and lead time but the most competitive price. We have stable supplier who doing long term cooperation and supplies high quality parts. Meanwhile, most products are automatic assembled, so that we can offer the competitive price with the high price efficiency to our customers.

目录 Index


04-17	TLP SERIES - Plugs for pluggable terminal blocks Pitch: 3.50mm, 3.81 mm, 5.00mm, 5.08mm, 7.50mm, 7.62mm, 10.16mm, 15.00mm	
18-33	TLP SERIES - Headers (sockets) for pluggable terminal blocks Pitch: 3.50mm, 3.81 mm, 5.00mm, 5.08mm, 7.50mm, 7.62mm, 10.16mm, 15.00mm	
34-39	THR SERIES - Headers for plugs pitch 3.50mm, 3.81mm, 5.00mm, 5.08mm	
40-47	TLC SERIES - Spring Clamp connectors Pitch: 2.50mm, 3.50mm, 3.81mm, 5.00mm, 5.08mm, 7.50mm, 7.62mm	
48-55	TL SERIES - Wire Protector Pitch: 3.50mm, 3.81 mm, 5.00mm, 5.08mm, 7.50mm, 7.62mm	
56-71	TL SERIES - Raising Clamp Pitch: 2.54mm, 3.50mm, 3.81 mm, 5.00mm, 5.08mm, 6.35mm, 7.50mm, 9.52mm, 10.16mm, 12.00mm, 12.70mm, 15.00mm	
72-83	TLM SERIES - Screwless Type Pitch: 2.50mm, 2.54mm, 3.50mm, 5.00mm, 5.08mm, 7.00mm, 7.50mm, 7.62mm, 10.00mm, 10.16mm	
84-89	TLB SERIES - Terminal Strip Pitch: 8.0mm, 10.0mm, 12.0mm, 13.5mm, 11mm, 14mm, 14.5mm, 16.5mm, 18.5mm	
90-93	TPK SERIES - Panel Feed-through Terminal Block	
94-95	TLF SERIES - Fuse Terminal Block	
96-97	FH SERIES - Fuse Holder	
99-100	TQQ & TQS SERIES - Fast connector for PCB	

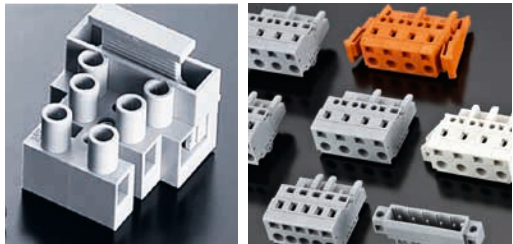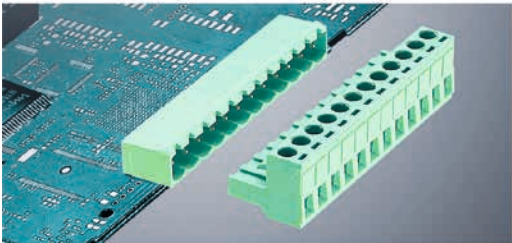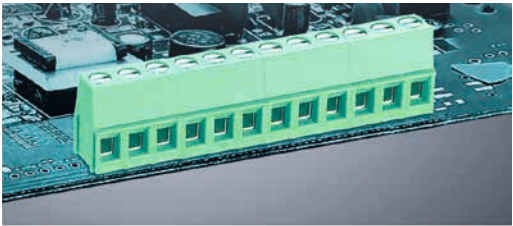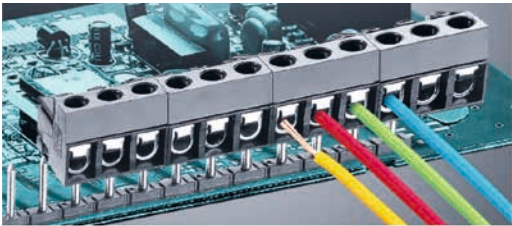


TLP SERIES-Plugs for pluggable terminal blocks

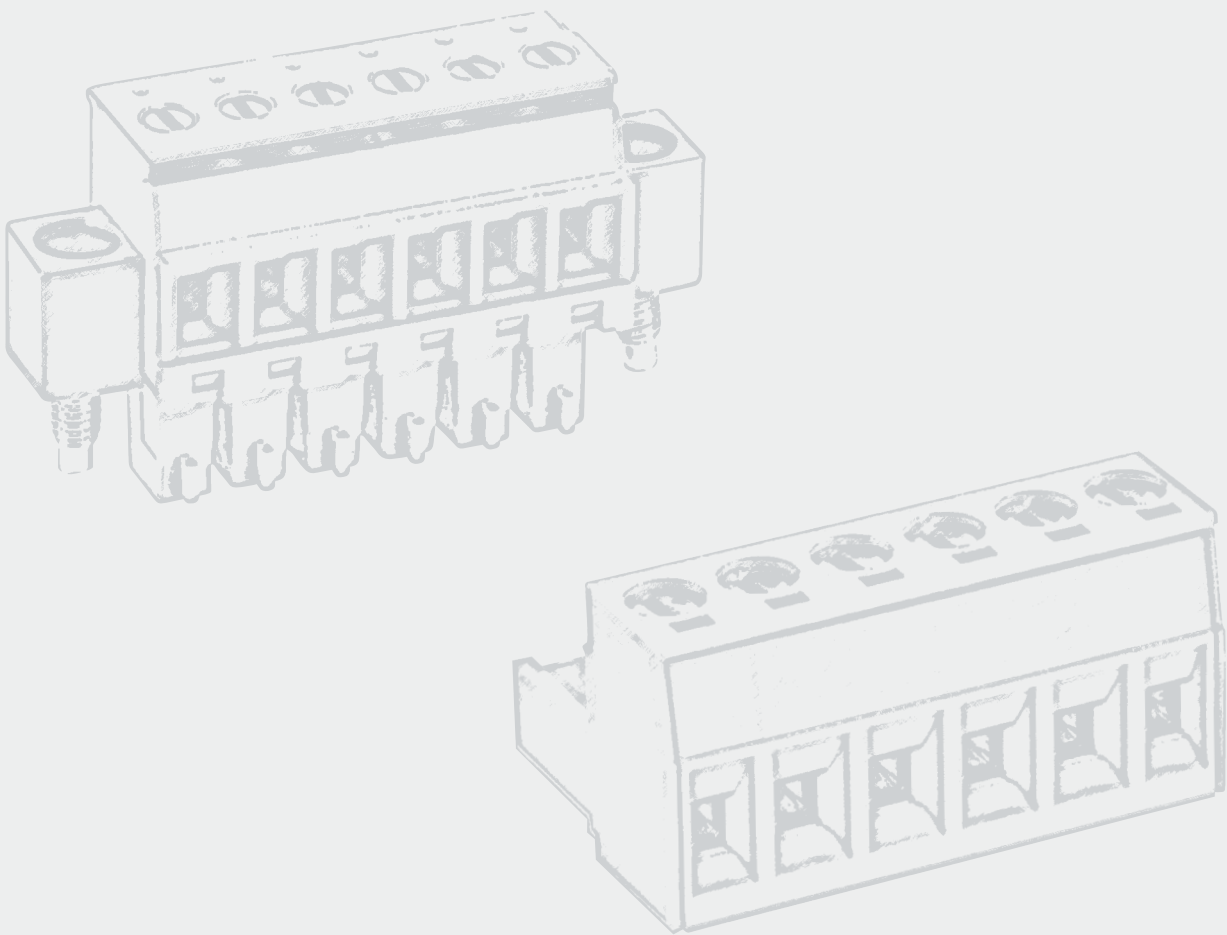

How to order

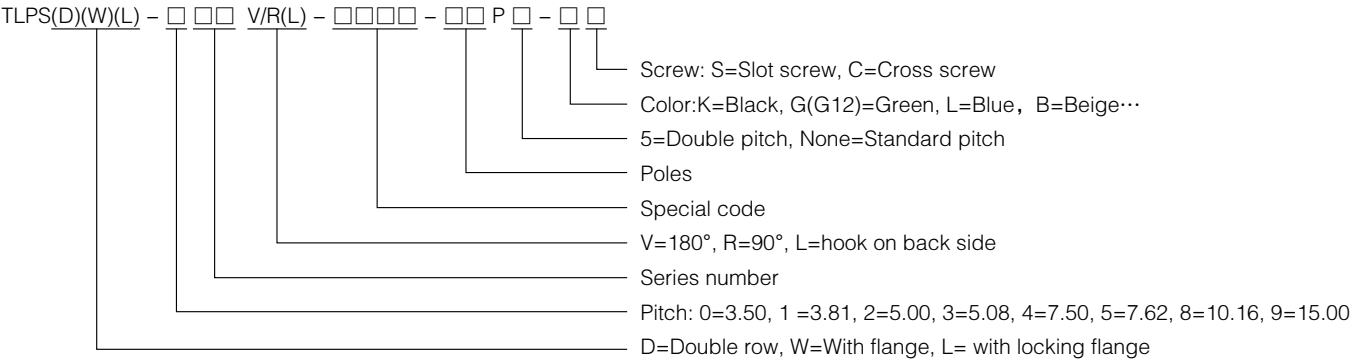


TLPS-001V(TLPS-100V)

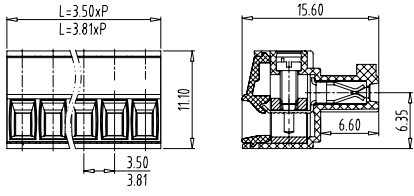


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
Wire range (线径):	30-14AWG 1.5mm ²
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPS-001V-02P(TLPS-100V-02P)
:	:
24	TLPS-001V-24P(TLPS-100V-24P)

TLPSW-001V(TLPSW-100V)

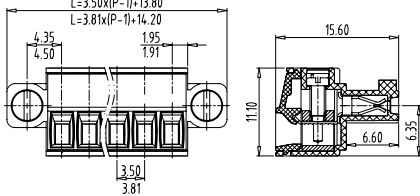



技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
Wire range (线径):	30-14AWG 1.5mm ²
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPSW-001V-02P(TLPSW-100V-02P)
:	:
24	TLPSW-001V-24P(TLPSW-100V-24P)

TLPS-001R(TLPS-100R)

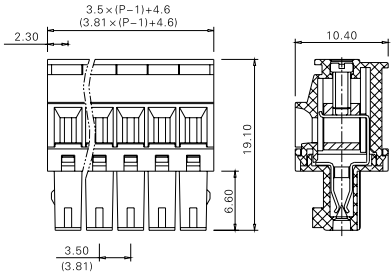


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	8A
Wire range (线径):	30-14AWG
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPS-001R-02P(TLPS-100R-02P)
:	:
24	TLPS-001R-24P(TLPS-100R-24P)

TLPSW-001R(TLPSW-100R)

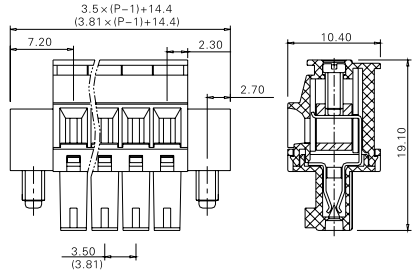


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	8A
Wire range (线径):	30-14AWG
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPSW-001R-02P(TLPSW-100R-02P)
:	:
24	TLPSW-001R-24P(TLPSW-100R-24P)

TLPS-001RL(TLPS-100RL)

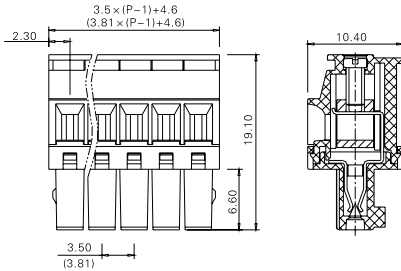


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	8A
Wire range (线径):	30-14AWG
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPS-001 RL-02P(TLPS-100RL-02P)
:	:
24	TLPS-001 RL-24P(TLPS-100RL-24P)

TLPSW-001RL(TLPSW-100RL)

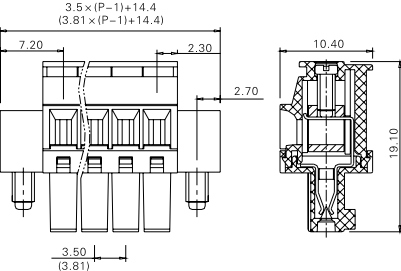


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	8A
Wire range (线径):	30-14AWG
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPSW-001RL-02P(TLPSW-100RL-02P)
:	:
24	TLPSW-001RL-24P(TLPSW-100RL-24P)

TLPS-002V(TLPS-101V)

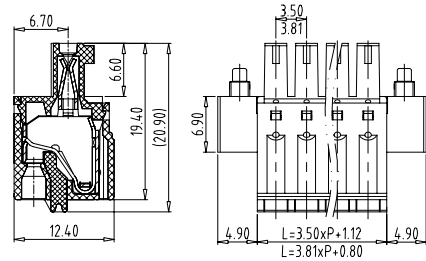



技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	 
Rated voltage (电压):	300V
Rated current (电流):	8A
Wire range (线径):	28–16AWG
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPS-002V-02P(TLPS-101V-02P)
:	:
24	TLPS-002V-24P(TLPS-101V-24P)

TLPSW-002V(TLPSW-101V)

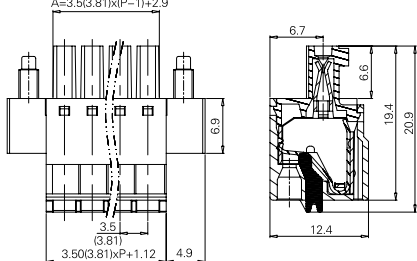



技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	 
Rated voltage (电压):	300V
Rated current (电流):	8A
Wire range (线径):	28–16AWG
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPSW-002V-02P(TLPSW-101V-02P)
:	:
24	TLPSW-002V-24P(TLPSW-101V-24P)

TLPS-003




技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	30–16AWG
Screw (螺丝):	M2.0
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPS-003-02P
:	:
24	TLPS-003-24P

TLPSW-007(TLPSW-107)




技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	  (3.81Applying)
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Wire range (线径):	28–16AWG 0.34–1.5mm ²
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPSW-007-02P(TLPSW-107-02P)
:	:
24	TLPSW-007-24P(TLPSW-107-24P)

TLPSDW-007





技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Wire range (线径):	28–16AWG 0.34–1.5mm ²
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPSDW-007-04P
:	:
48	TLPSDW-007-48P

TLPSL-007(TLPSL-107)

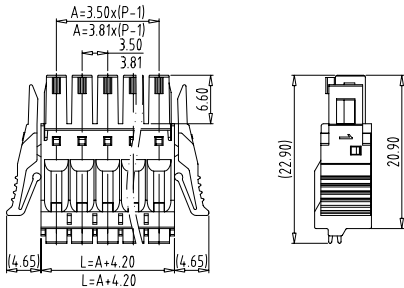


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	  (3.81Applying)
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Wire range (线径):	28–16AWG 0.34–1.5mm ²
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPSL-007-02P(TLPSL-107-02P)
:	:
24	TLPSL-007-24P(TLPSL-107-24P)

TLPS-006V




技术数据 Technical data	
Pitch (间距):	2.50mm
Approval (认证):	 
Rated voltage (电压):	150V
Rated current (电流):	5A
Wire range (线径):	28~20AWG
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPS-006V-02P
:	:
24	TLPS-006V-24P

TLPS-007(TLPS-107)




技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	  (3.81Applying)
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Wire range (线径):	28–16AWG 0.34–1.5mm ²
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPS-007-02P(TLPS-107-02P)
:	:
24	TLPS-007-24P(TLPS-107-24P)

TLPSD-007




技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Wire range (线径):	28–16AWG 0.34–1.5mm ²
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPSD-007-04P
:	:
48	TLPSD-007-48P

TLPSDL-007

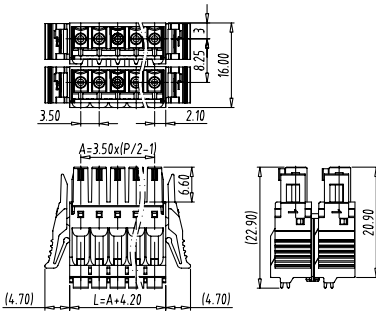


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Wire range (线径):	28–16AWG 0.34–1.5mm ²
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPSDL-007-04P
:	:
48	TLPSDL-007-48P

TLPSD-010

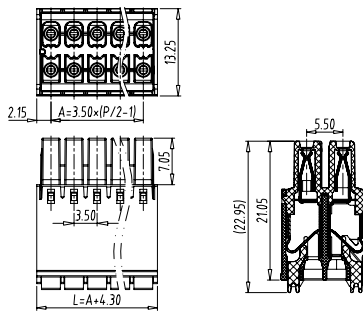


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Wire range (线径):	28–16AWG 0.34–1.5mm ²
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPSD-010-04P
:	:
48	TLPSD-010-48P

TLPSDW-010




技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Wire range (线径):	28–16AWG 0.34–1.5mm ²
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPSDW-010-04P
:	:
48	TLPSDW-010-48P

ISO9001
ISO14001

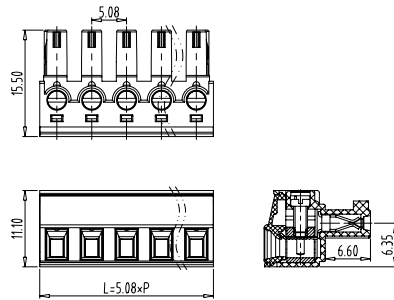


技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	IEC(Applying)
Rated voltage (电压):	300V	630V
Rated current (电流):	8A	17.5A
Wire range (线径):	30~14AWG	0.2~1.5mm ²
Screw (螺丝):	M2	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPS-313V-02P	
:	:	
24	TLPS-313V-24P	

TLPSW-215(TLPSW-301)

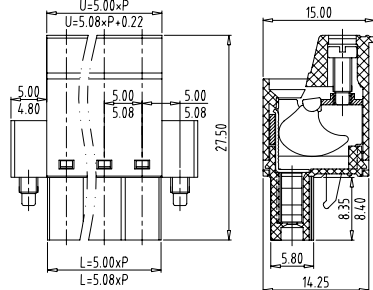


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 (5.00mm Applying)  (5.00mm Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Wire range (线径):	30-12AWG 0.34-2.5mm ²
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPSW-215-02P(TLPSW-301-02P)
:	:
24	TLPSW-215-24P(TLPSW-301-24P)

TLPHS-112

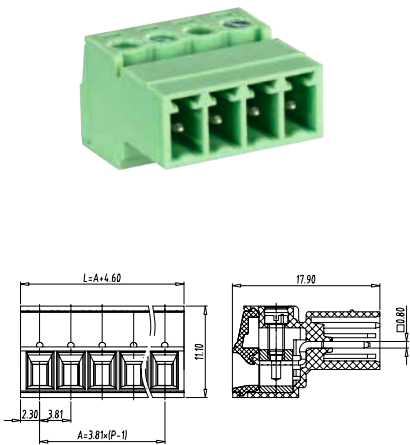


技术数据 Technical data		
Pitch (间距):	3.81mm	
Approval (认证):	 	VDE(Applying)
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	8A
Wire range (线径):	30–14AWG	0.2–1.5mm ²
Screw (螺丝):	M2	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHS-112-02P	
:	:	
24	TLPHS-112-24P	

TLPHSW-112

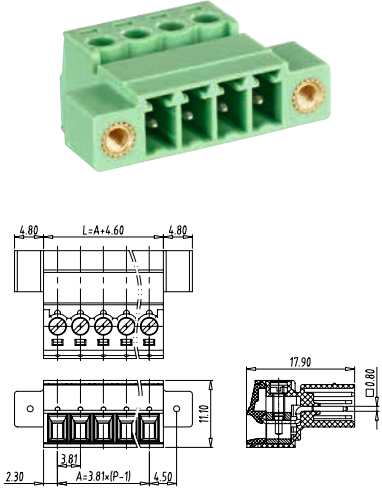


技术数据 Technical data		
Pitch (间距):	3.81mm	
Approval (认证):	 	VDE(Applying)
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	8A
Wire range (线径):	30–14AWG	0.2–1.5mm ²
Screw (螺丝):	M2	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHSW-112-02P	
:	:	
24	TLPHSW-112-24P	

TLPHSA-112

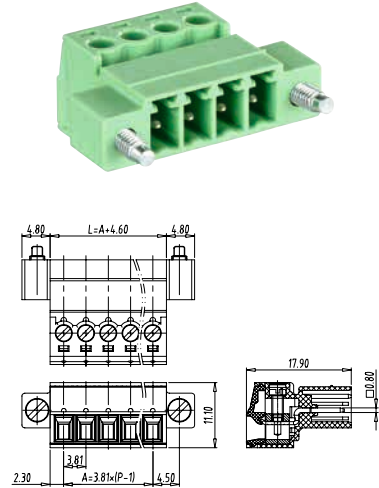


技术数据 Technical data		
Pitch (间距):	3.81mm	
Approval (认证):	 	VDE(Applying)
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	8A
Wire range (线径):	30–14AWG	0.2–1.5mm ²
Screw (螺丝):	M2	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHSA-112-02P	
:	:	
24	TLPHSA-112-24P	

TLPS-009V(TLPS-109V)

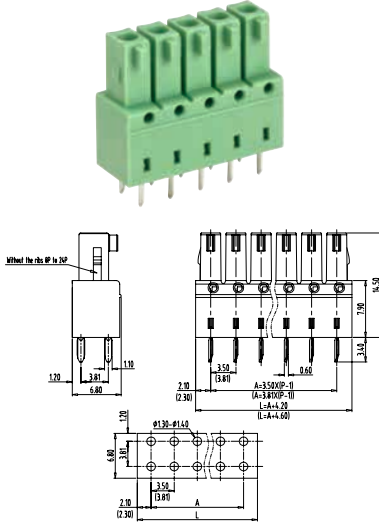


技术数据 Technical data		
Pitch (间距):	3.50mm(3.81mm)	
Approval (认证):	 	VDE(Applying)
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	8A
PCB hole Dia(PCB 直径):	Φ 1.3mm–Φ 1.4mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPS-009V-02P(TLPS-109V-02P)	
:	:	
24	TLPS-009V-24P(TLPS-109V-24P)	

TLPS-009R(TLPS-109R)

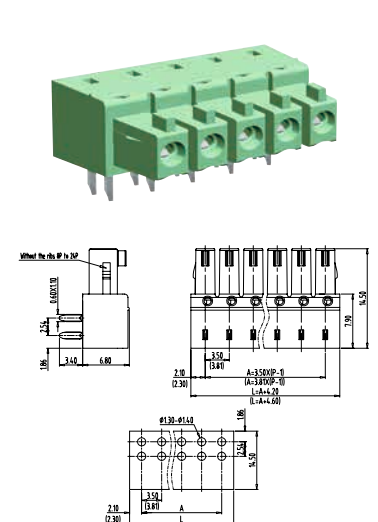


技术数据 Technical data		
Pitch (间距):	3.50mm(3.81mm)	
Approval (认证):	 	VDE(Applying)
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	8A
PCB hole Dia(PCB 直径):	Φ 1.3mm–Φ 1.4mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPS-009R-02P(TLPS-109R-02P)	
:	:	
24	TLPS-009R-24P(TLPS-109R-24P)	

TLPSW-009V(TLPSW-109V)

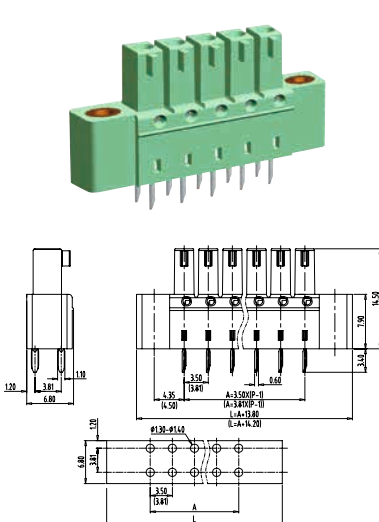


技术数据 Technical data		
Pitch (间距):	3.50mm(3.81mm)	
Approval (认证):	 	VDE(Applying)
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	8A
PCB hole Dia(PCB 直径):	Φ 1.3mm–Φ 1.4mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPSW-009V-02P(TLPSW-109V-02P)	
:	:	
24	TLPSW-009V-24P(TLPSW-109V-24P)	

TLPHS-304

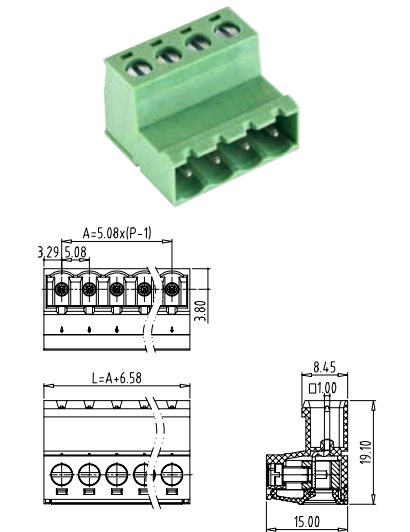


技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	 	IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	20A	20A
Wire range (线径):	30–12AWG	0.2–2.5mm ² sol / str 4mm ² sol
Screw (螺丝):	M3	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHS-304-02P	
:	:	
24	TLPHS-304-24P	

TLPHSW-304

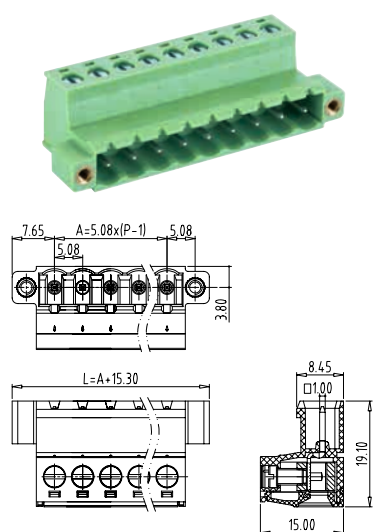


技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	 	IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	20A	20A
Wire range (线径):	30–12AWG	0.2–2.5mm ² sol / str 4mm ² sol
Screw (螺丝):	M3	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHSW-304-02P	
:	:	
24	TLPHSW-304-24P	

TLPHSA-304

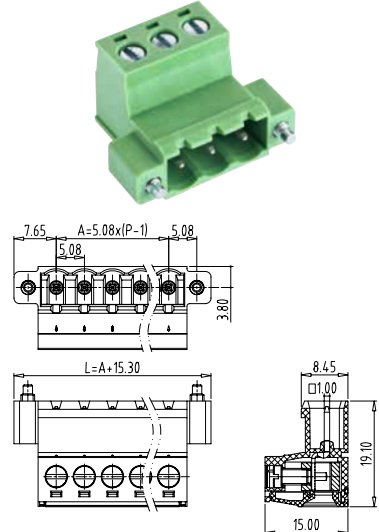


技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	 	IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	20A	20A
Wire range (线径):	30–12AWG	0.2–2.5mm ² sol / str 4mm ² sol
Screw (螺丝):	M3	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHSA-304-02P	
:	:	
24	TLPHSA-304-24P	

TLPSW-009R(TLPSW-109R)

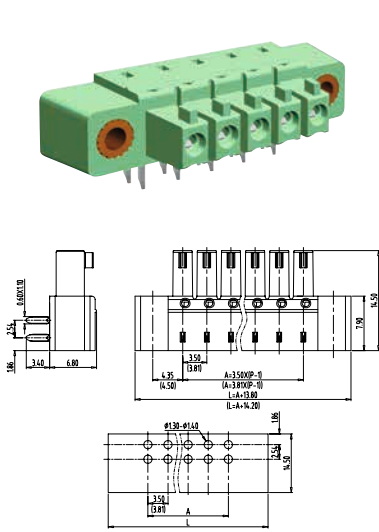


技术数据 Technical data		
Pitch (间距):	3.50mm(3.81mm)	
Approval (认证):	 	VDE(Applying)
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	8A
PCB hole Dia(PCB 直径):	Φ 1.3mm–Φ 1.4mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPSW-009R-02P(TLPSW-109R-02P)	
:	:	
24	TLPSW-009R-24P(TLPSW-109R-24P)	

TLPS-305V

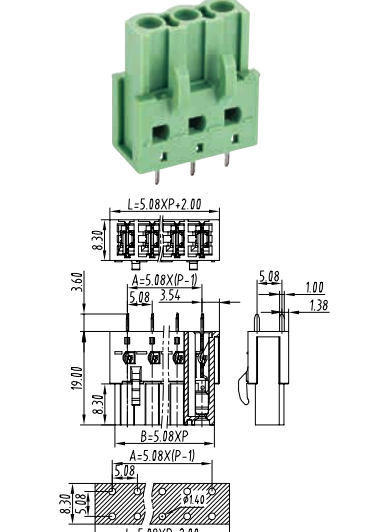


技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	 	IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.4mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPS-305V-02P	
:	:	
24	TLPS-305V-24P	

TLPSW-305V

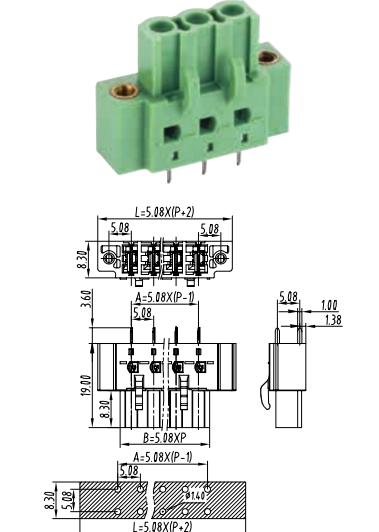

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	 	IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.4mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPSW-305V-02P	
:	:	
24	TLPSW-305V-24P	


TLPS-305R



技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):		IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.4mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPS-305R-02P	
:	:	
24	TLPS-305R-24P	


TLPSW-305R



技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):		VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.4mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPSW-305R-02P	
:	:	
24	TLPSW-305R-24P	



TLPS-308



技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):		VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
Wire range (线径):	30-12AWG	0.2-2.5mm ² sol / str 4mm ² sol
Screw (螺丝):	M3.0	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPS-308-02P	
:	:	
24	TLPS-308-24P	



TLPSW-308

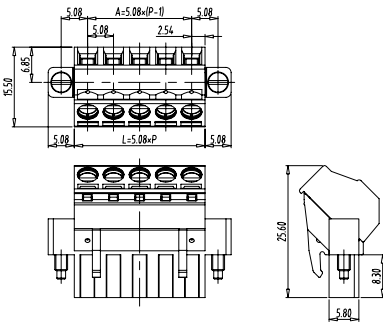

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):		VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
Wire range (线径):	30-12AWG	0.2-2.5mm ² sol / str 4mm ² sol
Screw (螺丝):	M3.0	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPSW-308-02P	
:	:	
24	TLPSW-308-24P	


TLPS-309

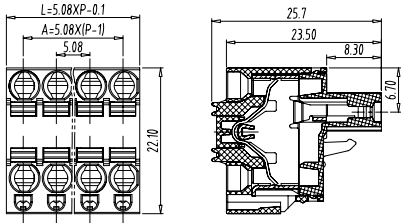

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):		
Rated voltage (电压):	300V	320V
Rated current (电流):	15A	15A
Wire range (线径):	26-12AWG	0.34-2.5mm ²

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPS-309-02P	
:	:	
24	TLPS-309-24P	


TLPSW-309

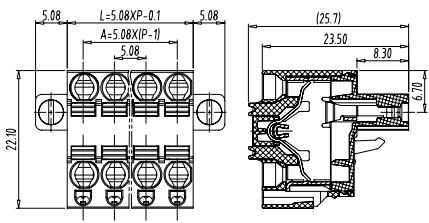

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):		
Rated voltage (电压):	300V	320V
Rated current (电流):	15A	15A
Wire range (线径):	26-12AWG	0.34-2.5mm ²
Screw (螺丝):	M2.5	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPSW-309-02P	
:	:	
24	TLPSW-309-24P	


TLPS-312V



技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	IEC(Applying)
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	20A
Wire range (线径):	30-12AWG	0.2-2.5mm ² sol / str 4mm ² sol
Screw (螺丝):	M3	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPS-312V-02P	
:	:	
24	TLPS-312V-24P	


TLPSW-312V



技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	IEC(Applying)
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	20A
Wire range (线径):	30-12AWG	0.2-2.5mm ² sol / str 4mm ² sol
Screw (螺丝):	M3	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPSW-312V-02P	
:	:	
24	TLPSW-312V-24P	


TLPS-400V(TLPS-500V)

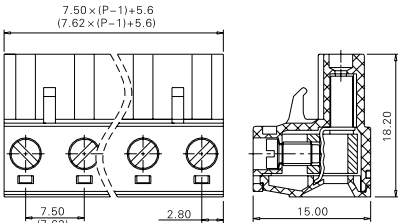

技术数据 Technical data		
Pitch (间距):	7.50mm(7.62mm)	
Approval (认证):		
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	20A
Wire range (线径):	30-12AWG	0.2-2.5mm ² sol / str 4mm ² sol
Screw (螺丝):	M3	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPS-400V-02P(TLPS-500V-02P)	
:	:	
24	TLPS-400V-24P(TLPS-500V-24P)	


TLPSW-400V(TLPSW-500V)

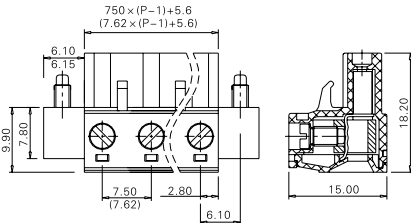

技术数据 Technical data		
Pitch (间距):	7.50mm(7.62mm)	
Approval (认证):		
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	20A
Wire range (线径):	30-12AWG	0.2-2.5mm ² sol / str 4mm ² sol
Screw (螺丝):	M3	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPSW-400V-02P(TLPSW-500V-02P)	
:	:	
24	TLPSW-400V-24P(TLPSW-500V-24P)	


TLPS-400R(TLPS-500R)



技术数据 Technical data		
Pitch (间距):	7.50mm (7.62mm)	
Approval (认证):		
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	20A
Wire range (线径):	30-12AWG	0.2-2.5mm ² sol / str 4mm ² sol
Screw (螺丝):	M3.0	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPS-400R-02P (TLPS-500R-02P)	
:	:	
16	TLPS-400R-16P (TLPS-500R-16P)	


TLPSW-400R(TLPSW-500R)



技术数据 Technical data		
Pitch (间距):	7.50mm (7.62mm)	
Approval (认证):		
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	20A
Wire range (线径):	30-12AWG	0.2-2.5mm ² sol / str 4mm ² sol
Screw (螺丝):	M3.0	


料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPSW-400R-02P(TLPSW-500R-02P)	
:	:	
16	TLPSW-400R-16P(TLPSW-500R-16P)	

TLPS-400RL (TLPS-500RL)

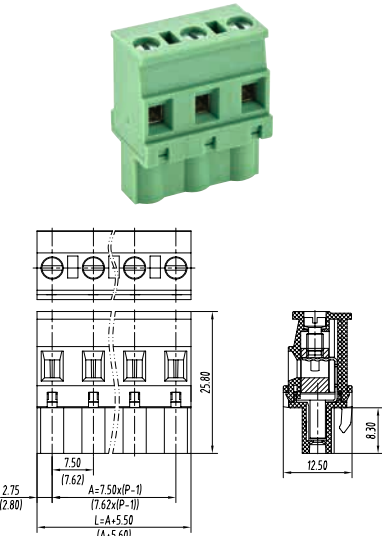


技术数据 Technical data	
Pitch (间距):	7.50mm (7.62mm)
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	16A
Wire range (线径):	30-12AWG
Screw (螺丝):	M3.0
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPS-400RL-02P (TLPS-500RL-02P)
:	:
16	TLPS-400RL-16P (TLPS-500RL-16P)

TLPSW-400RL(TLPSW-500RL)

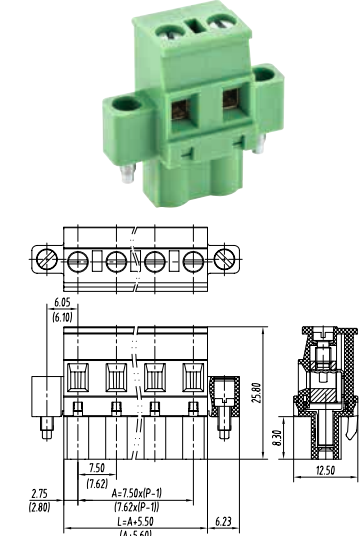


技术数据 Technical data	
Pitch (间距):	7.50mm (7.62mm)
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	16A
Wire range (线径):	30-12AWG
Screw (螺丝):	M3.0
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPSW-400RL-02P(TLPSW-500RL-02P)
:	:
16	TLPSW-400RL-16P(TLPSW-500RL-16P)

TLPS-501

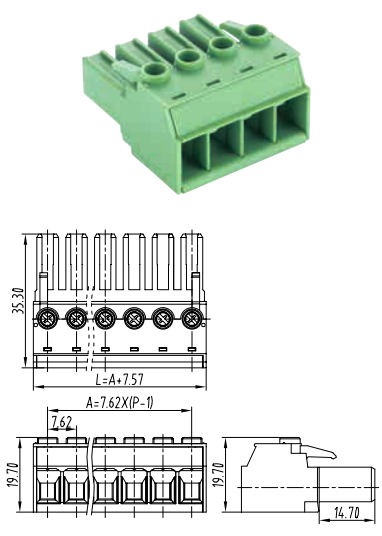


技术数据 Technical data	
Pitch (间距):	7.62mm
Approval (认证):	UL
Rated voltage (电压):	600V
Rated current (电流):	41A
Wire range (线径):	8-24AWG
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPS-501-02P
:	:
12	TLPS-501-12P

TLPSW-800V

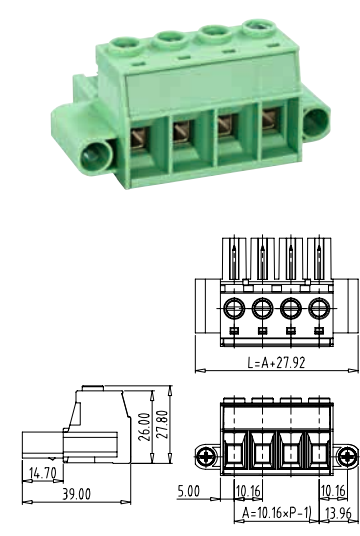


技术数据 Technical data	
Pitch (间距):	10.16mm
Approval (认证):	UL(Applying) IEC(Applying)
Rated voltage (电压):	600V
Rated current (电流):	55A
Wire range (线径):	20-6AWG
Screw (螺丝):	M4
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPSW-800V-02P
:	:
12	TLPSW-800V-12P

TLPS-900V

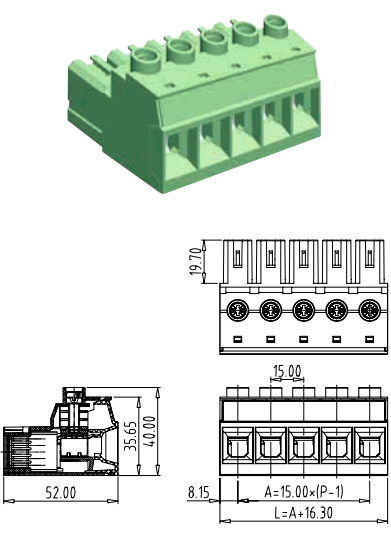


技术数据 Technical data	
Pitch (间距):	15.00mm
Approval (认证):	UL(Applying) IEC(Applying)
Rated voltage (电压):	600V
Rated current (电流):	115A
Wire range (线径):	20-2AWG
Screw (螺丝):	M5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPS-900V-02P
:	:
08	TLPS-900V-08P

TLPSW-900V

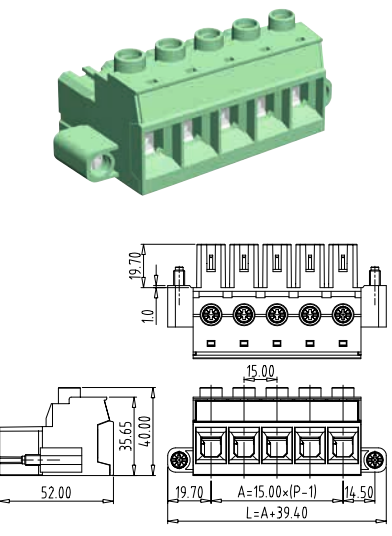


技术数据 Technical data	
Pitch (间距):	15.00mm
Approval (认证):	UL(Applying) IEC(Applying)
Rated voltage (电压):	600V
Rated current (电流):	115A
Wire range (线径):	20-2AWG
Screw (螺丝):	M5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPSW-900V-02P
:	:
08	TLPSW-900V-08P

TLPSW-501

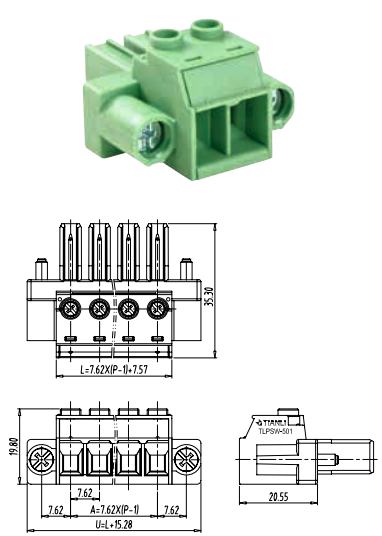


技术数据 Technical data	
Pitch (间距):	7.62mm
Approval (认证):	UL
Rated voltage (电压):	600V
Rated current (电流):	41A
Wire range (线径):	24-8AWG
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPSW-501-02P
:	:
14	TLPSW-501-14P

TLPS-502

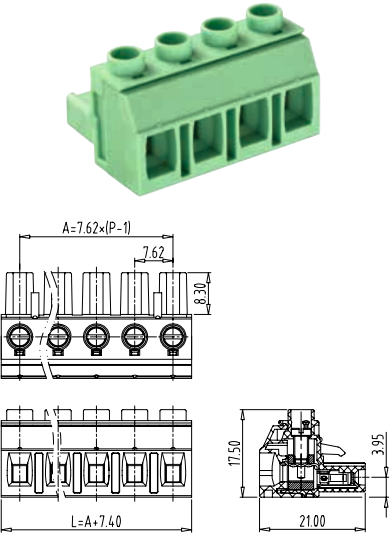


技术数据 Technical data	
Pitch (间距):	7.62mm
Approval (认证):	UL IEC(Applying)
Rated voltage (电压):	600V
Rated current (电流):	20A
Wire range (线径):	30-12AWG
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPS-502-02P
:	:
12	TLPS-502-12P

TLPS-800V

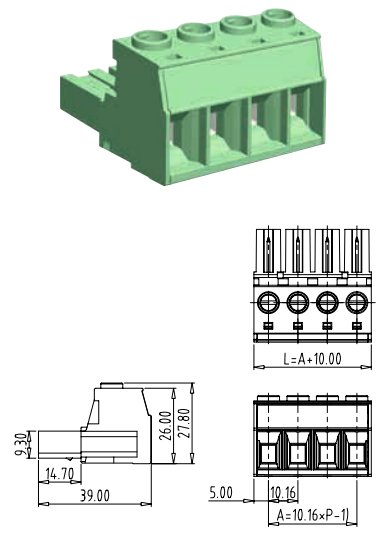


技术数据 Technical data	
Pitch (间距):	10.16mm
Approval (认证):	UL(Applying) IEC(Applying)
Rated voltage (电压):	600V
Rated current (电流):	55A
Wire range (线径):	20-6AWG
Screw (螺丝):	M4
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPS-800V-02P
:	:
12	TLPS-800V-12P

TLP SERIES-Headers (sockets) for pluggable terminal blocks

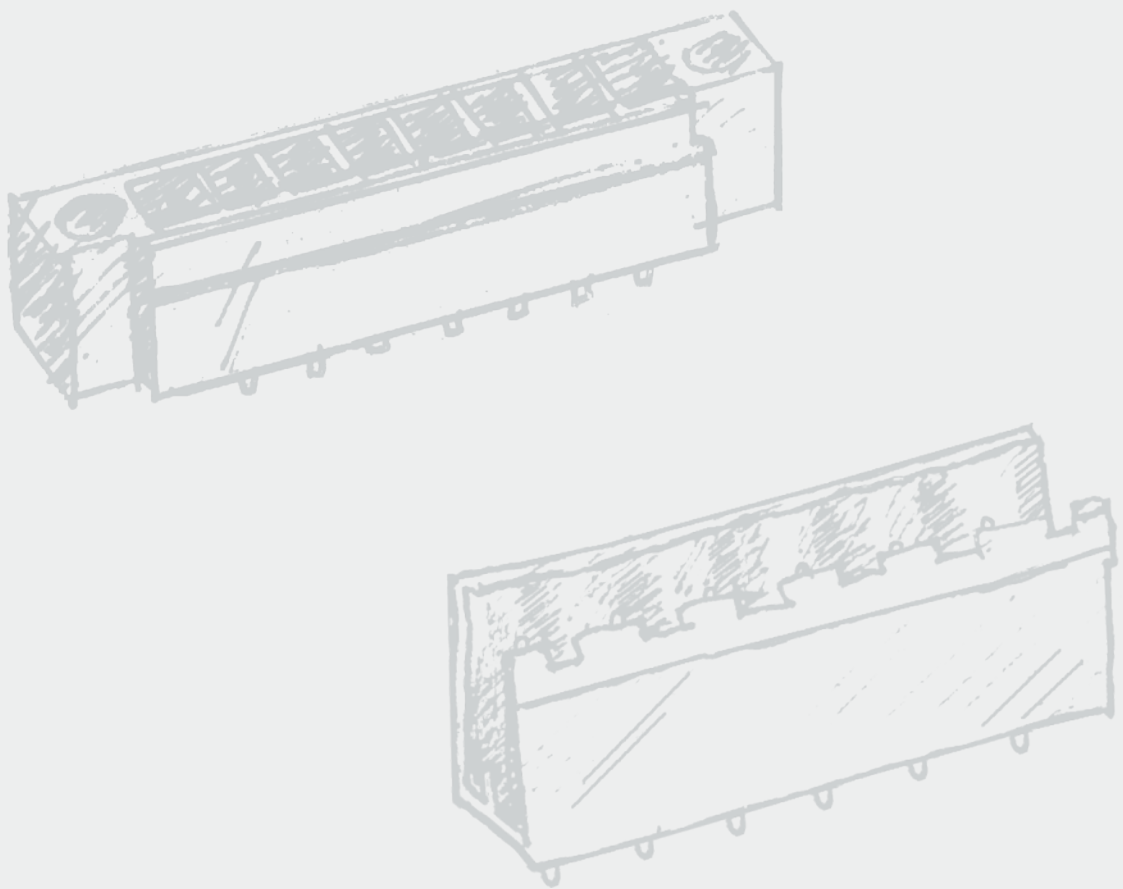

How to order

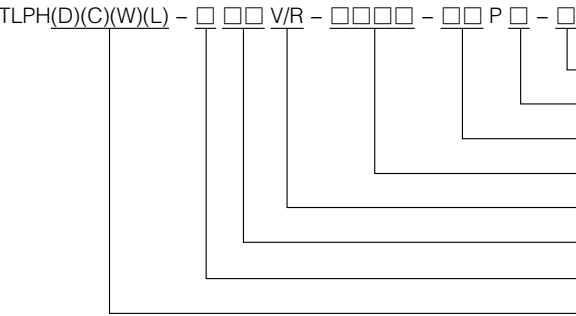

- Color: K=Black, G(G12)=Green
- 5=Double pitch, None=Standard pitch
- Poles
- Special code
- V=180°, R=90°
- Series number
- Pitch: 0=3.50, 1=3.81, 2=5.00, 3=5.08, 4=7.50, 5=7.62, 8=10.16, 9=15.00
- D=Double row, C=With side panels, L=With engagement noses

TLP SERIES-Headers (sockets) for pluggable terminal blocks

ISO9001
ISO14001

REACH



UL US

CE

RoHS


CCC

TLPHC-001V(TLPHC-100V)

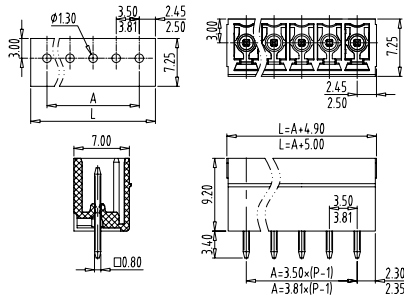


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL (ULus) CE
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHC-001V-02P(TLPHC-100V-02P)
:	:
24	TLPHC-001V-24P(TLPHC-100V-24P)

TLPHW-001V(TLPHW-100V)

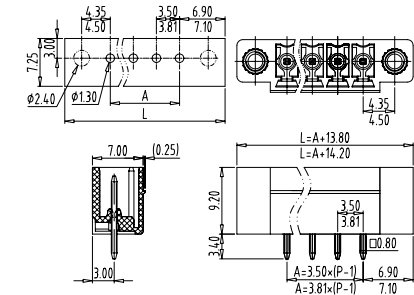


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL (ULus) CE
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHW-001V-02P(TLPHW-100V-02P)
:	:
24	TLPHW-001V-24P(TLPHW-100V-24P)

TLPHC-001R(TLPHC-100R)

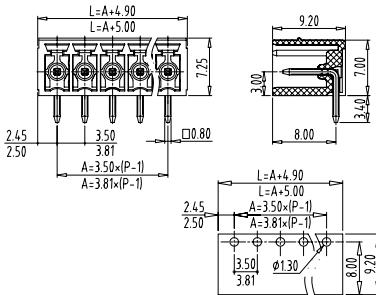



技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL (ULus) CE
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHC-001R-02P(TLPHC-100R-02P)
:	:
24	TLPHC-001R-24P(TLPHC-100R-24P)

TLPHW-001R(TLPHW-100R)

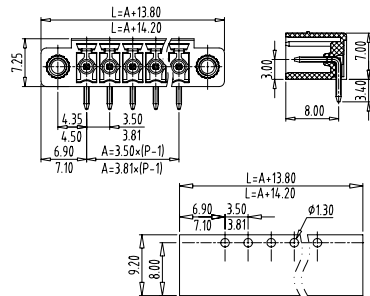


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	ULus CE
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHW-001R-02P(TLPHW-100R-02P)
:	:
24	TLPHW-001R-24P(TLPHW-100R-24P)

TLPHL-001V-1570

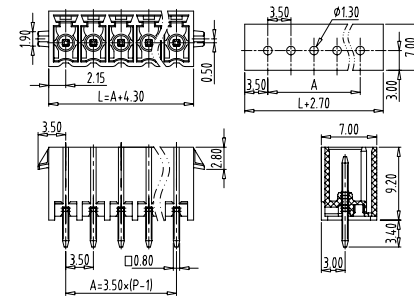

技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL(Applying) IEC(Applying)
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHL-001V-1570-02P
:	:
24	TLPHL-001V-1570-24P


TLPHL-001R-1570

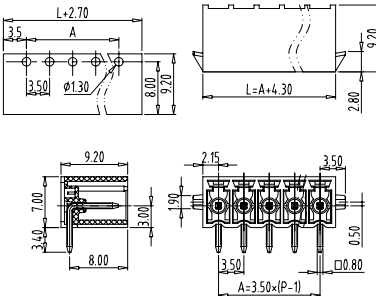

技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL(Applying) IEC(Applying)
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHL-001R-1570-02P
:	:
24	TLPHL-001R-1570-24P


ISO9001
ISO14001

TLPH-200R(TLPH-300R)

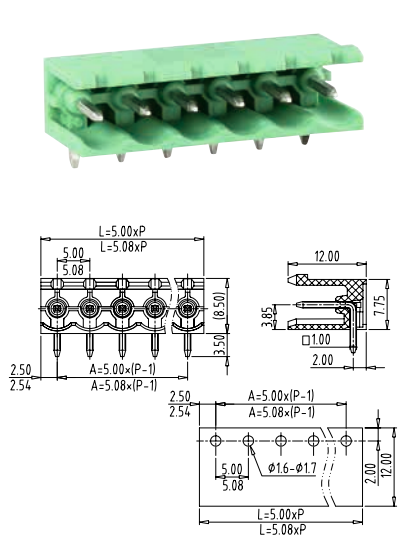


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.6~1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPH-200R-02P(TLPH-300R-02P)
:	:
24	TLPH-200R-24P(TLPH-300R-24P)

TLPH-200R-1603(TLPH-300R-1603)

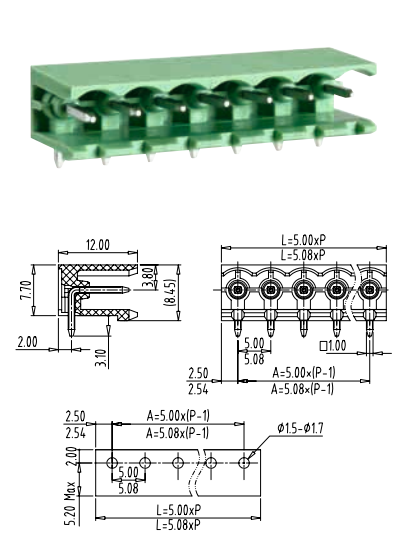


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPH-200R-1603-02P(TLPH-3000R-1603-02P)
:	:
24	TLPH-200R-1603-24P(TLPH-3000R-1603-24P)

TLPHC-200R-1603(TLPHC-300R-1603)

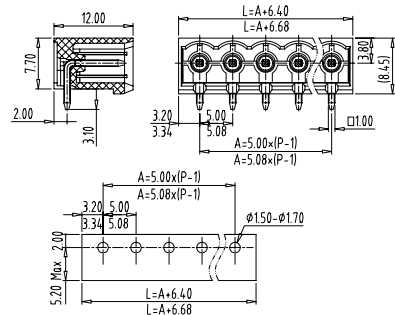


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHC-200R-1603-02P(TLPHC-300R-1603-02P)
:	:
24	TLPHC-200R-1603-24P(TLPHC-300R-1603-24P)

TLPHW-200R-1603(TLPHW-300R-1603)

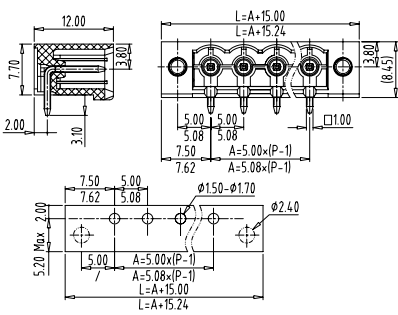


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHW-200R-1603-02P(TLPHW-300R-1603-02P)
:	
24	TLPHW-200R-1603-24P(TLPHW-300R-1603-24P)

TLPHW-300R-0544

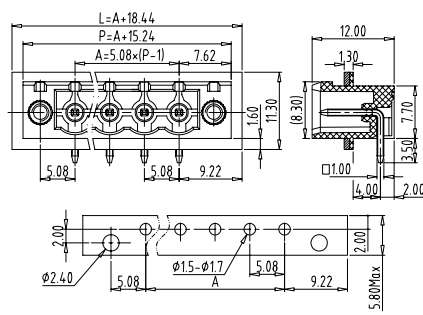



技术数据 Technical data	
Pitch (间距):	5.08mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	16A
PCB hole Dia(PCB 直径):	Φ 1.5~1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHW-300R-0544-02P
:	:
24	TLPHW-300R-0544-24P

TLPH-300A

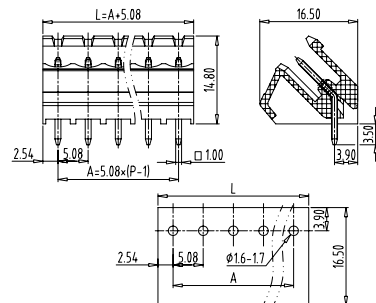


技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):		IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.6–1.7mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPH-300A-02P	
:		
24	TLPH-300A-24P	

TLPHC-300A

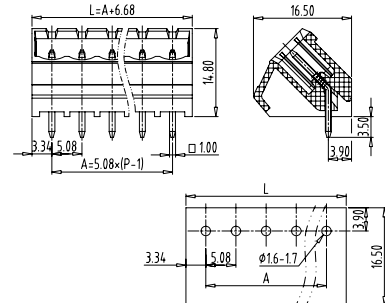

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	RoHS	IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.6–1.7mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHC-300A-02P	
:		
24	TLPHC-300A-24P	



TLPHW-300A

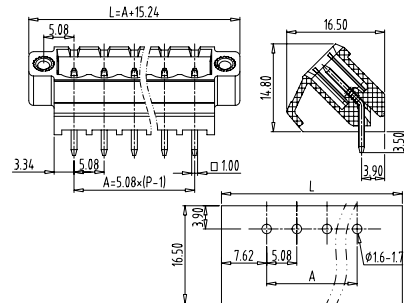


技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	RoHS	IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.6~1.7mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHW-300A-02P	
:		
24	TLPHW-300A-24P	

TLP SERIES-Headers (sockets) for pluggable terminal blocks


TLPH-201R



技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	16A
PCB hole Dia(PCB 直径):	Φ 1.6~1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPH-201R-02P
:	
04	TLPH-201R-04P

TLPH-201RL


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	16A
PCB hole Dia(PCB 直径):	Φ 1.6~1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPH-201RL-02P
:	:
04	TLPH-201RL-04P

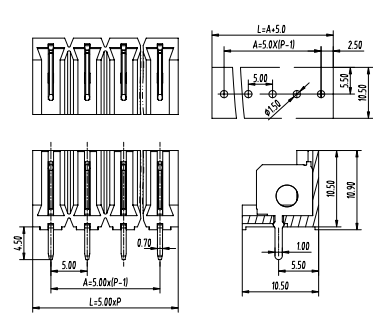TLPH-225

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	15A
PCB hole Dia(PCB 直径):	Φ 1.3~1.5mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPH-225-02P
:	
36	TLPH-225-36P


22 www.china-tianli.com

TLPHDC-008R(TLPHDC-108R)

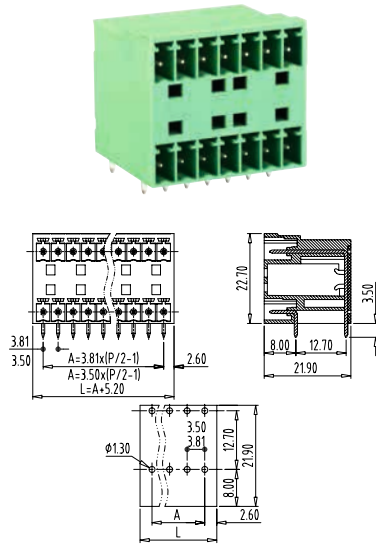


技术数据 Technical data	
Pitch (间距):	3.50mm (3.81mm)
Approval (认证):	UL
Rated voltage (电压):	300V 160V(3.5) 320V(3.81)
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHDC-008R-04P(TLPHDC-108R-04P)
:	:
48	TLPHDC-008R-48P(TLPHDC-108R-48P)

TLPHDW-008R(TLPHDW-108R)

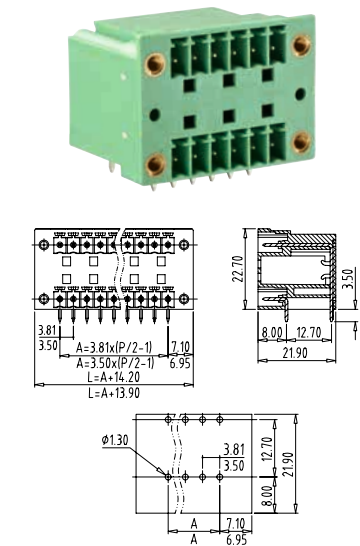


技术数据 Technical data	
Pitch (间距):	3.50mm (3.81mm)
Approval (认证):	UL
Rated voltage (电压):	300V 160V(3.5) 320V(3.81)
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHDW-008R-04P(TLPHDW-108R-04P)
:	:
48	TLPHDW-008R-48P(TLPHDW-108R-48P)

TLPHDC-010V

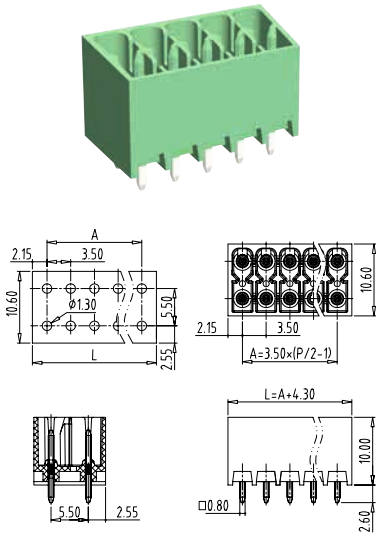


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHDC-010V-04P
:	:
48	TLPHDC-010V-48P

TLPHDC-010R

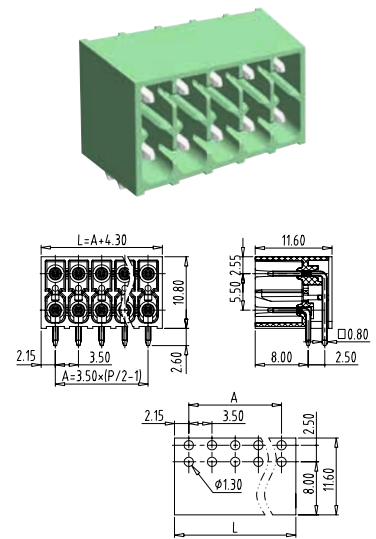


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHDC-010R-04P
:	:
48	TLPHDC-010R-48P

TLPHDW-010V

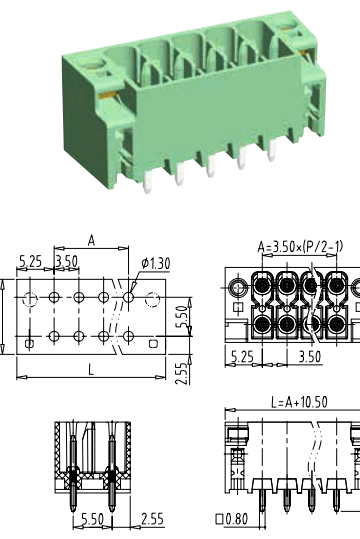


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHDW-010V-04P
:	:
48	TLPHDW-010V-48P

TLPHDW-010R

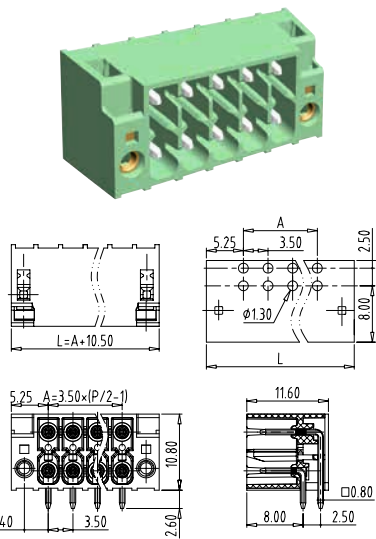


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHDW-010R-04P
:	:
48	TLPHDW-010R-48P

TLPHDC-200V(TLPHDC-300V)

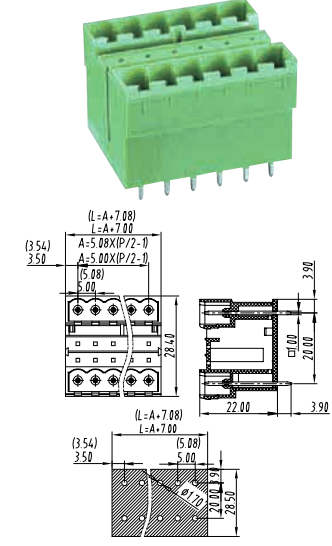


技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	UL(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.6-1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHDC-200V-04P(TLPHDC-300V-04P)
:	:
48	TLPHDC-200V-48P(TLPHDC-300V-48P)

TLPHDW-200V(TLPHDW-300V)

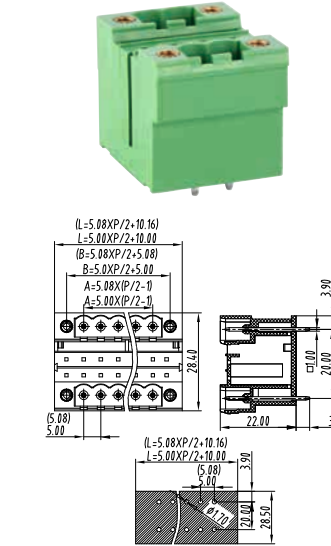


技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	UL(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.6-1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHDW-200V-04P(TLPHDW-300V-04P)
:	:
48	TLPHDW-200V-48P(TLPHDW-300V-48P)

TLPHDC-200R(TLPHDC-300R)

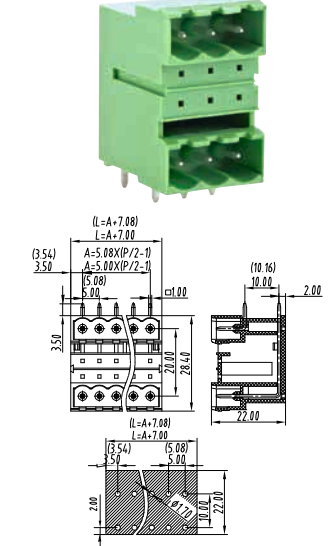


技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	UL(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.6-1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHDC-200R-04P(TLPHDC-300R-04P)
:	:
48	TLPHDC-200R-48P(TLPHDC-300R-48P)

TLPHDW-200R(TLPHDW-300R)

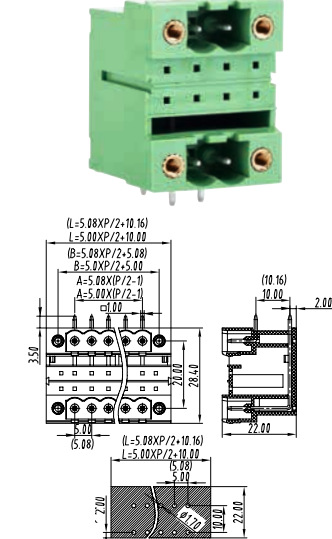


技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	UL(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.6-1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHDW-200R-04P(TLPHDW-300R-04P)
:	:
48	TLPHDW-200R-48P(TLPHDW-300R-48P)

TLPHD-203V(TLPHD-303V)

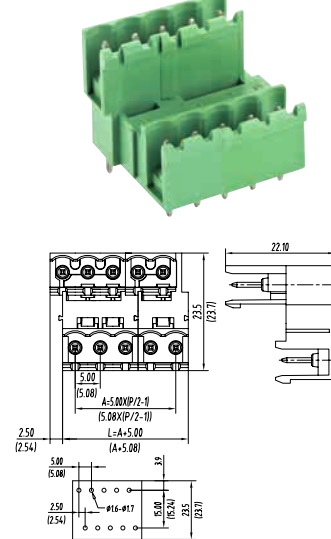



技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	UL(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.6-1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHD-203V-04P(TLPHD-303V-04P)
:	:
48	TLPHD-203V-48P(TLPHD-303V-48P)

TLPHDC-203V(TLPHDC-303V)

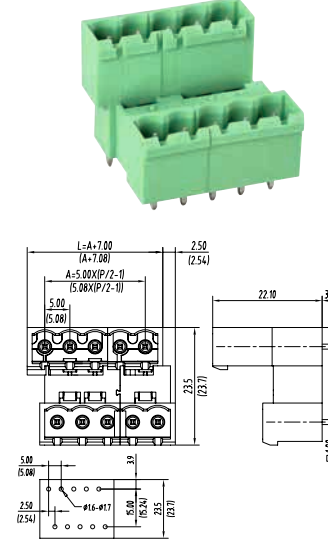


技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	UL(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.6-1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHDC-203V-04P(TLPHDC-303V-04P)
:	:
48	TLPHDC-203V-48P(TLPHDC-303V-48P)

TLPHDW-203V(TLPHDW-303V)

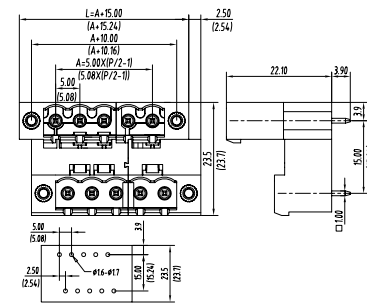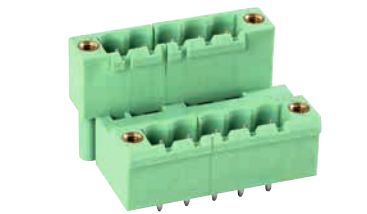


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.6–1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHDW-203V-04P(TLPHDW-303V-04P)
:	:
48	TLPHDW-203V-48P(TLPHDW-303V-48P)

TLPHD-203R(TLPHD-303R)




技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.6–1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHD-203R-04P(TLPHD-303R-04P)
:	:
48	TLPHD-203R-48P(TLPHD-303R-48P)

TLPHDC-203R(TLPHDC-303R)





技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.6–1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHDC-203R-04P(TLPHDC-303R-04P)
:	:
48	TLPHDC-203R-48P(TLPHDC-303R-48P)

TLPHDW-203R(TLPHDW-303R)

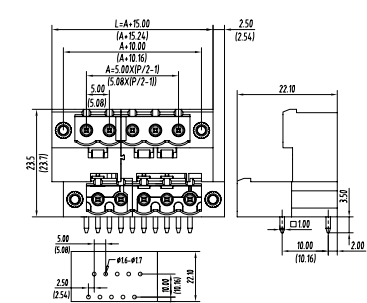



技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
PCB hole Dia(PCB 直径):	Φ 1.6–1.7mm
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLPHDW-203R-04P(TLPHDW-303R-04P)
:	:
48	TLPHDW-203R-48P(TLPHDW-303R-48P)

TLPCK-001-S





适用产品 Applicable product	
TLPHC/W-001 (TLPHC/W-100)	
TLPHC/W-004 (TLPHC/W-104)	
TLPHDC/W-005 (TLPHC/W-105)	
TLPHDC/W/L-007	
TLPHDC/W-008 (TLPHDC/W-108)	
TLPHS-100	
TLPHS (W/WA)-112	
TLPHC/W/L-313	

TLPCK-002-S





适用产品 Applicable product	
TLPS(W)-200/300/400/500	
TLPS(W)-201	
TLPS(W)-207	
TLPS(W)-302	
TLPS(W)-305	
TLPS(W)-308	
TLPS(W)-309	
TLPS(W)-312	
TLPS(W)-502	

TLPCK-003-S




适用产品 Applicable product	
TLPH(C/W)-200/300/400/500	
TLPHDC/W-200	
TLPH-201	
TLPHD(C/W)-203/303	
TLPHS(W/WA)-304	
TLPHW-306	

TLPCK-004-S




适用产品 Applicable product	
TLPS(w)-501	
TLPHC(W)-501	
TLPS(w)-800	
TLPHC(W)-800	

TLPCK-006-S




适用产品 Applicable product	
TLPSD(W/L)-010	
TLPSDC(W)-010	


THR SERIES-Headers for plugs

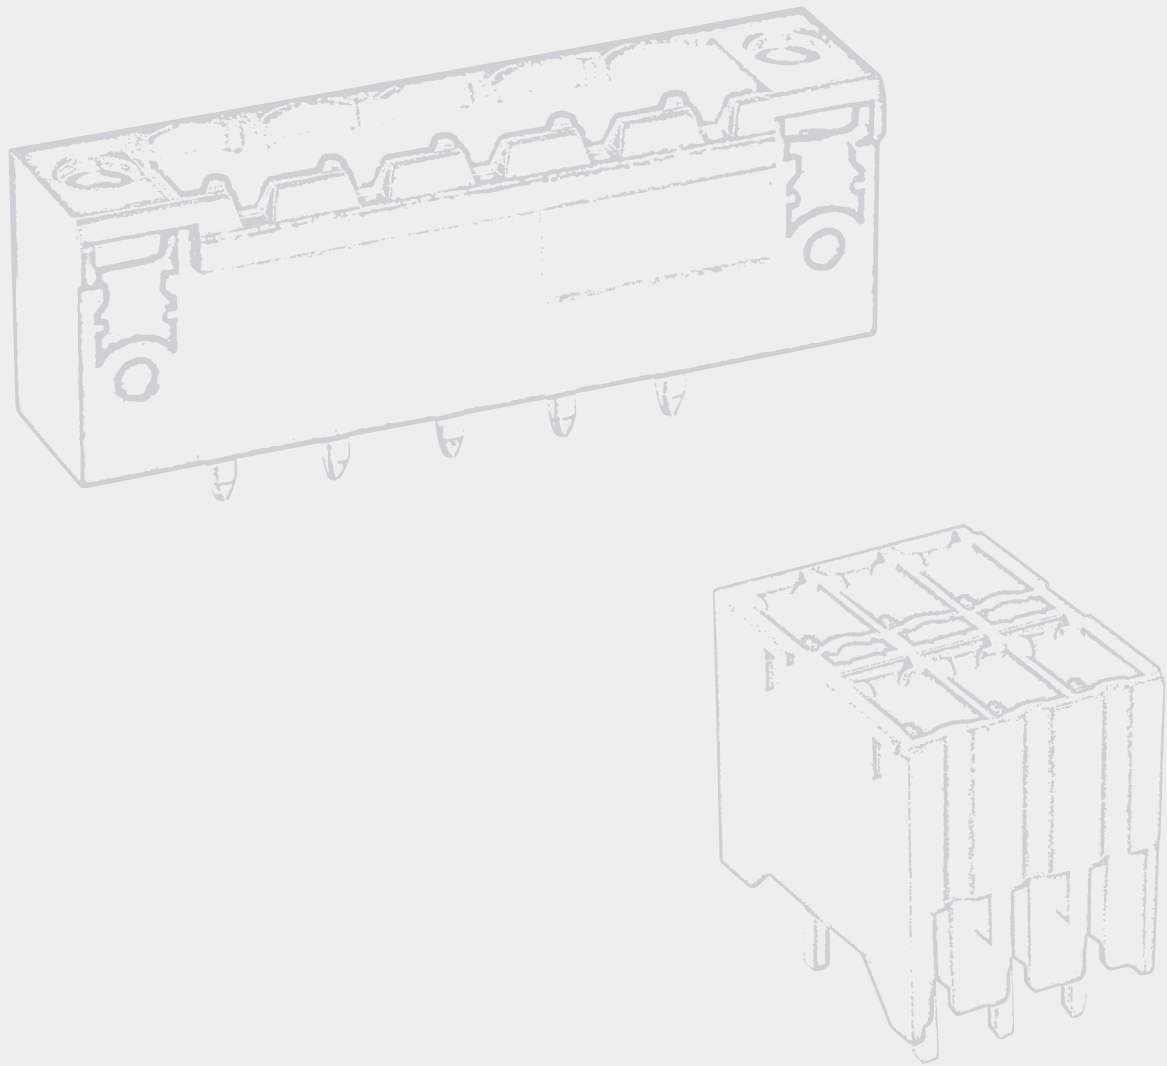

How to order

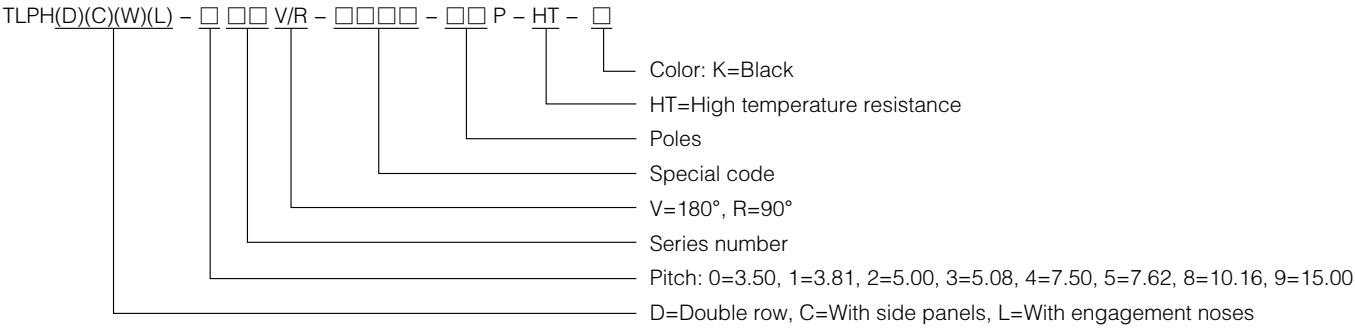


TLPHC-001V-XXP-HT(TLPHC-100V-XXP-HT)

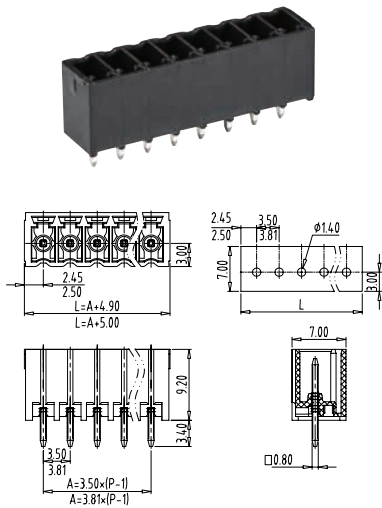

技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL IEC(Applying)
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.4mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHC-001V(TLPHC-100V)-02P-HT
:	:
24	TLPHC-001V(TLPHC-100V)-24P-HT


TLPHL-001V-XXP-HT

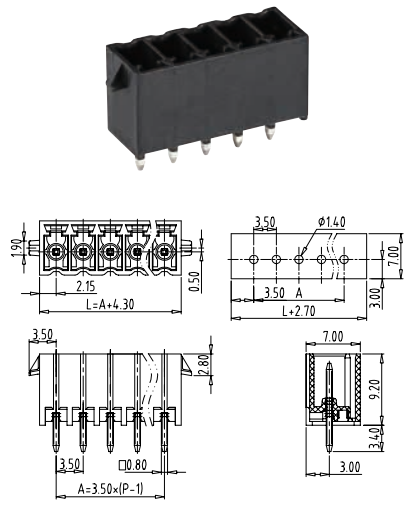

技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL IEC(Applying)
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.4mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHL-001V-02P-HT
:	:
24	TLPHL-001V-24P-HT


TLPHW-001V-XXP-HT(TLPHW-100V-XXP-HT)

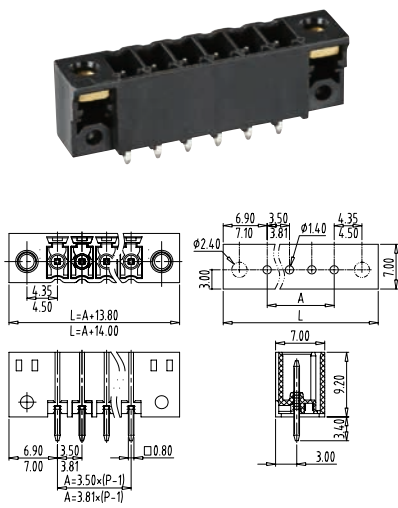

技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL IEC(Applying)
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.4mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHW-001V(TLPHW-100V)-02P-HT
:	:
24	TLPHW-001V(TLPHW-100V)-24P-HT


TLPHC-001R-XXP-HT(TLPHC-100R-XXP-HT)

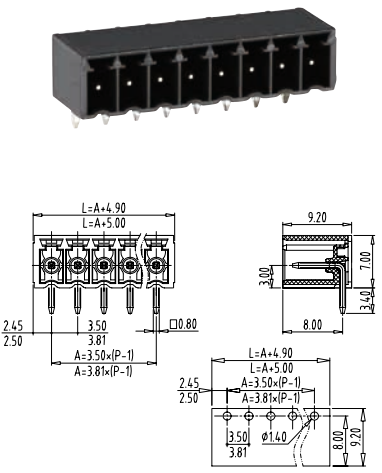

技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL IEC(Applying)
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.4mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHC-001R(TLPHC-100R)-02P-HT
:	:
24	TLPHC-001R(TLPHC-100R)-24P-HT


TLPHL-001R-XXP-HT

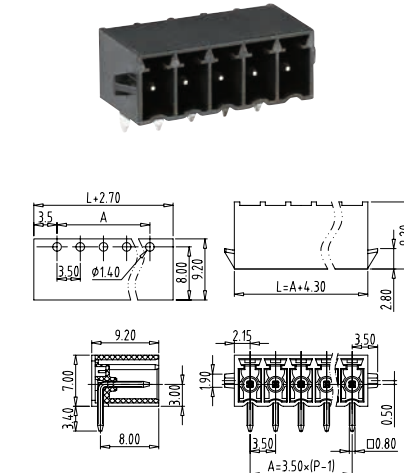

技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL IEC(Applying)
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.4mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHL-001R-02P-HT
:	:
24	TLPHL-001R-24P-HT


TLPHW-001R-XXP-HT(TLPHW-100R-XXP-HT)

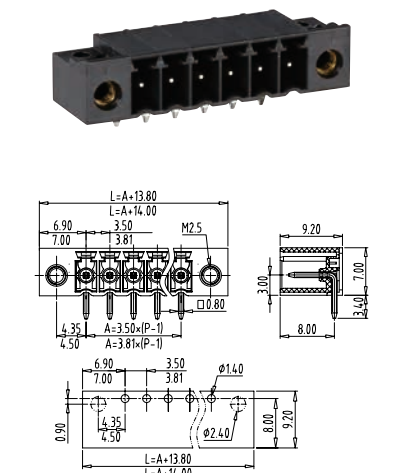

技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL IEC(Applying)
Rated voltage (电压):	300V 150V
Rated current (电流):	8A 10A
PCB hole Dia(PCB 直径):	Φ 1.4mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLPHW-001R(TLPHW-100R)-02P-HT
:	:
24	TLPHW-001R(TLPHW-100R)-24P-HT



TLPH-200V-XXP-HT(TLPH-300V-XXP-HT)

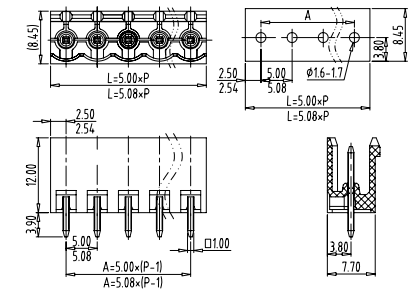

技术数据 Technical data		
Pitch (间距):	5.00mm(5.08mm)	
Approval (认证):		IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.6–Φ 1.7mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPH-200V(TLPH-300V)-02P-HT	
:	:	
24	TLPH-200V(TLPH-300V)-24P-HT	



TLPHC-200V-XXP-HT(TLPHC-300V-XXP-HT)

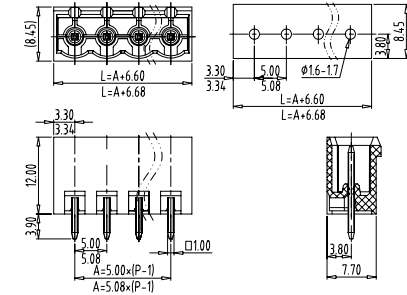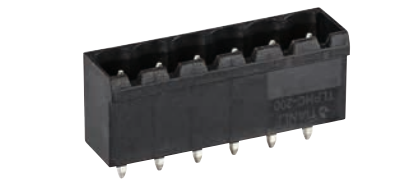

技术数据 Technical data		
Pitch (间距):	5.00mm(5.08mm)	
Approval (认证):		IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.6–Φ 1.7mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHC-200V(TLPHC-300V)-02P-HT	
:	:	
24	TLPHC-200V(TLPHC-300V)-24P-HT	


TLPHW-200V-XXP-HT(TLPHW-300V-XXP-HT)

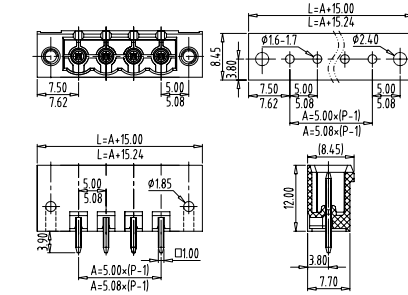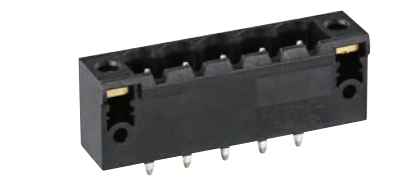

技术数据 Technical data		
Pitch (间距):	5.00mm(5.08mm)	
Approval (认证):		IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.6–Φ 1.7mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHW-200V(TLPHW-300V)-02P-HT	
:	:	
24	TLPHW-200V(TLPHW-300V)-24P-HT	


TLPHC-313V-XXP-HT

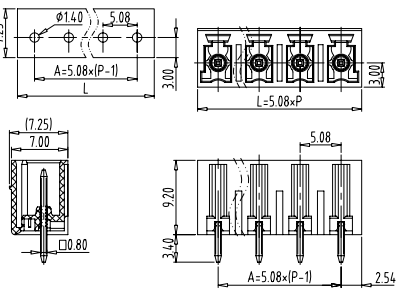

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	IEC(Applying)
Rated voltage (电压):	300V	630V
Rated current (电流):	8A	17.5A
PCB hole Dia(PCB 直径):	Φ 1.4mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHC-313V-02P-HT	
:	:	
24	TLPHC-313V-24P-HT	



TLPHW-313V-XXP-HT

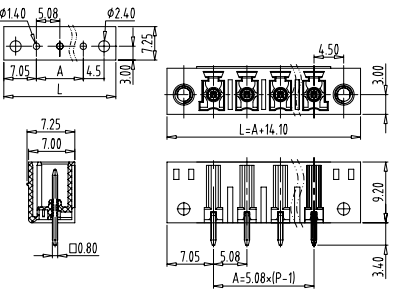

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	IEC(Applying)
Rated voltage (电压):	300V	630V
Rated current (电流):	8A	17.5A
PCB hole Dia(PCB 直径):	Φ 1.4mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHW-313V-02P-HT	
:	:	
24	TLPHW-313V-24P-HT	


TLPHC-313R-XXP-HT

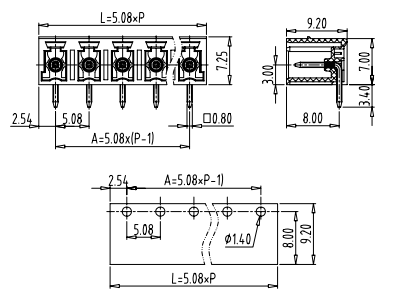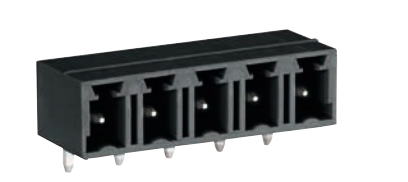

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	IEC(Applying)
Rated voltage (电压):	300V	630V
Rated current (电流):	8A	17.5A
PCB hole Dia(PCB 直径):	Φ 1.4mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHC-313R-02P-HT	
:	:	
24	TLPHC-313R-24P-HT	


TLPH-200R-XXP-HT(TLPH-300R-XXP-HT)

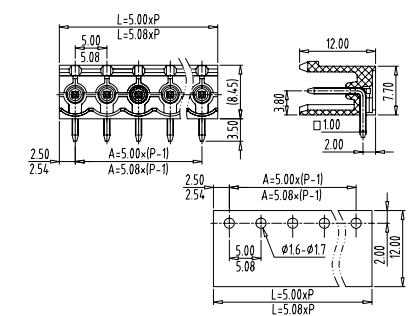

技术数据 Technical data		
Pitch (间距):	5.00mm(5.08mm)	
Approval (认证):		IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.6–Φ 1.7mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPH-200R(TLPH-300R)-02P-HT	
:	:	
24	TLPH-200R(TLPH-300R)-24P-HT	


TLPHC-200R-XXP-HT(TLPHC-300R-XXP-HT)

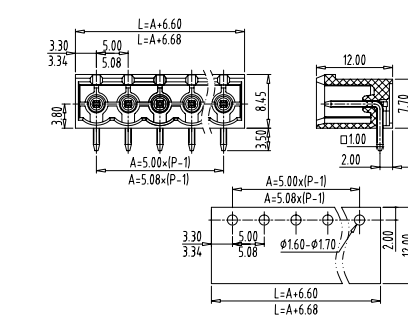

技术数据 Technical data		
Pitch (间距):	5.00mm(5.08mm)	
Approval (认证):		IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.6–Φ 1.7mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHC-200R(TLPHC-300R)-02P-HT	
:	:	
24	TLPHC-200R(TLPHC-300R)-24P-HT	


TLPHW-200R-XXP-HT(TLPHW-300R-XXP-HT)

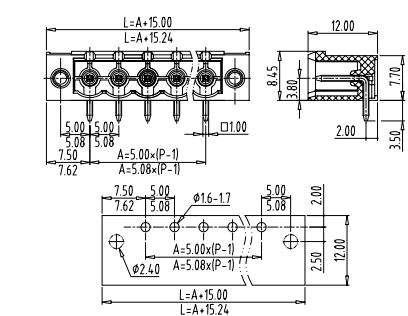

技术数据 Technical data		
Pitch (间距):	5.00mm(5.08mm)	
Approval (认证):		IEC(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	20A
PCB hole Dia(PCB 直径):	Φ 1.6–Φ 1.7mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHW-200R(TLPHW-300R)-02P-HT	
:	:	
24	TLPHW-200R(TLPHW-300R)-24P-HT	


TLPHW-313R-XXP-HT

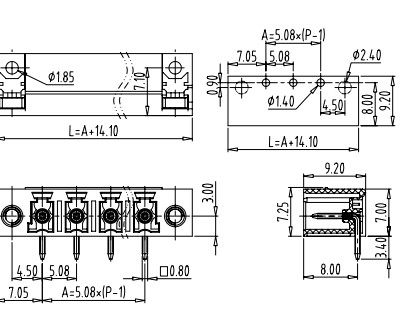

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	IEC(Applying)
Rated voltage (电压):	300V	630V
Rated current (电流):	8A	17.5A
PCB hole Dia(PCB 直径):	Φ 1.4mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLPHW-313R-02P-HT	
:	:	
24	TLPHW-313R-24P-HT	


TLPHDC-007V-XXP-HT

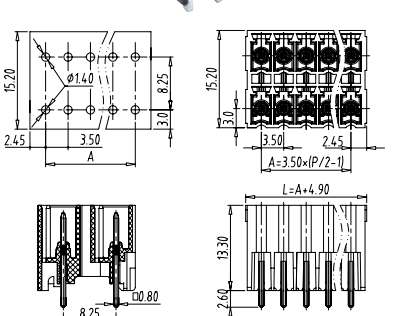

技术数据 Technical data		
Pitch (间距):	3.50mm	
Approval (认证):		
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	10A
PCB hole Dia(PCB 直径):	Φ 1.4mm	

料号 Part Number		
极数 (Poles)	型号 (Model)	
04	TLPHDC-007V-04P-HT	
:	:	
48	TLPHDC-007V-48P-HT	


TLPHDC-007R

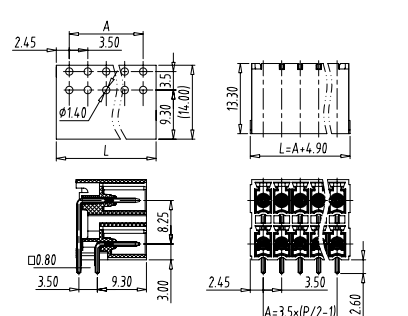

技术数据 Technical data		
Pitch (间距):	3.50mm	
Approval (认证):		
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	10A
PCB hole Dia(PCB 直径):	Φ 1.4mm	


料号 Part Number		
极数 (Poles)	型号 (Model)	
04	TLPHDC-007R-04P-HT	
:	:	
48	TLPHDC-007R-48P-HT	

TLPHDL-007V-XXP-HT

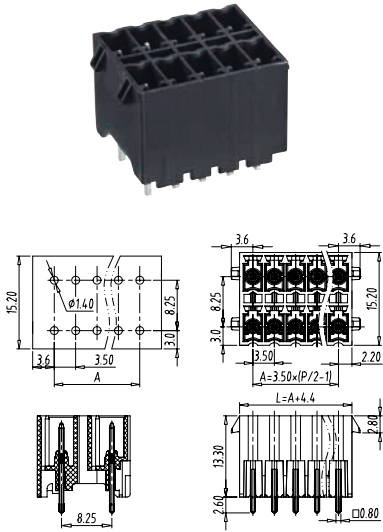


技术数据 Technical data		
Pitch (间距):	3.50mm	
Approval (认证):		
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	10A
PCB hole Dia(PCB 直径):	Φ 1.4mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
04	TLPHDL-007V-04P-HT	
:	:	
48	TLPHDL-007V-48P-HT	

TLPHDL-007R-XXP-HT

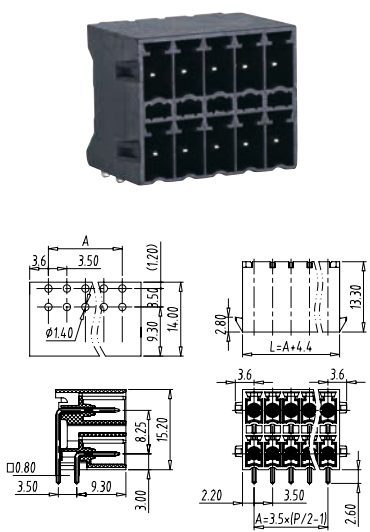


技术数据 Technical data		
Pitch (间距):	3.50mm	
Approval (认证):	 	
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	10A
PCB hole Dia(PCB 直径):	Φ 1.4mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
04	TLPHDL-007R-04P-HT	
:	:	
48	TLPHDL-007R-48P-HT	

TLPHDC-010V-XXP-HT

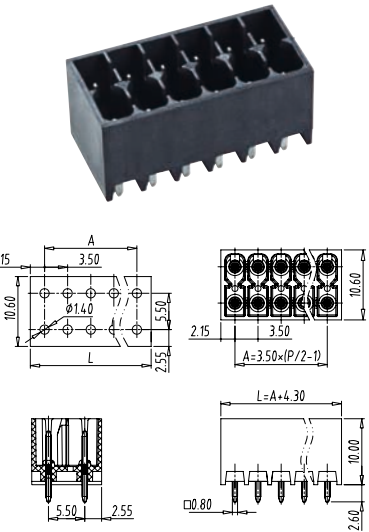


技术数据 Technical data		
Pitch (间距):	3.50mm	
Approval (认证):	 	
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	10A
PCB hole Dia(PCB 直径):	Φ 1.4mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
04	TLPHDC-010V-04P-HT	
:	:	
48	TLPHDC-010V-48P-HT	

TLPHDC-010R-XXP-HT

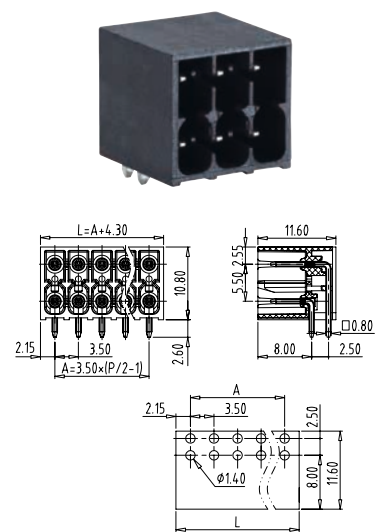


技术数据 Technical data		
Pitch (间距):	3.50mm	
Approval (认证):		
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	10A
PCB hole Dia(PCB 直径):	Φ 1.4mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
04	TLPHDC-010R-04P-HT	
:	:	
48	TLPHDC-010R-48P-HT	

TLPHDW-010V-XXP-HT

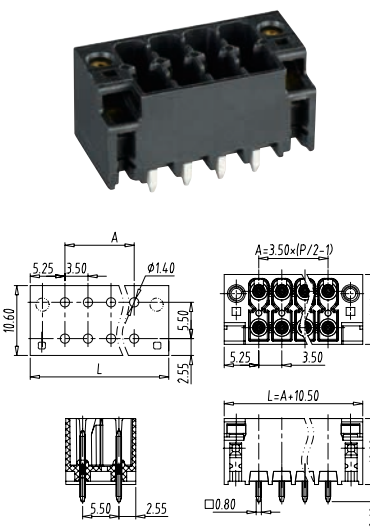


技术数据 Technical data		
Pitch (间距):	3.50mm	
Approval (认证):	UL 	
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	10A
PCB hole Dia(PCB 直径):	Φ 1.4mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
04	TLPHDW-010V-04P-HT	
:	:	
48	TLPHDW-010V-48P-HT	

TLPHDW-010R-XXP-HT

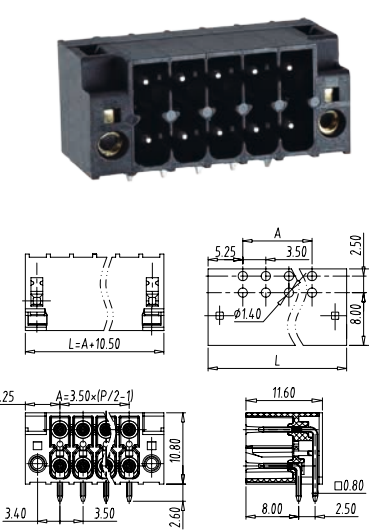


技术数据 Technical data		
Pitch (间距):	3.50mm	
Approval (认证):	UL 	
Rated voltage (电压):	300V	160V
Rated current (电流):	8A	10A
PCB hole Dia(PCB 直径):	Φ 1.4mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
04	TLPHDW-010R-04P-HT	
:	:	
48	TLPHDW-010R-48P-HT	


TLC SERIES-Spring clamp connectors

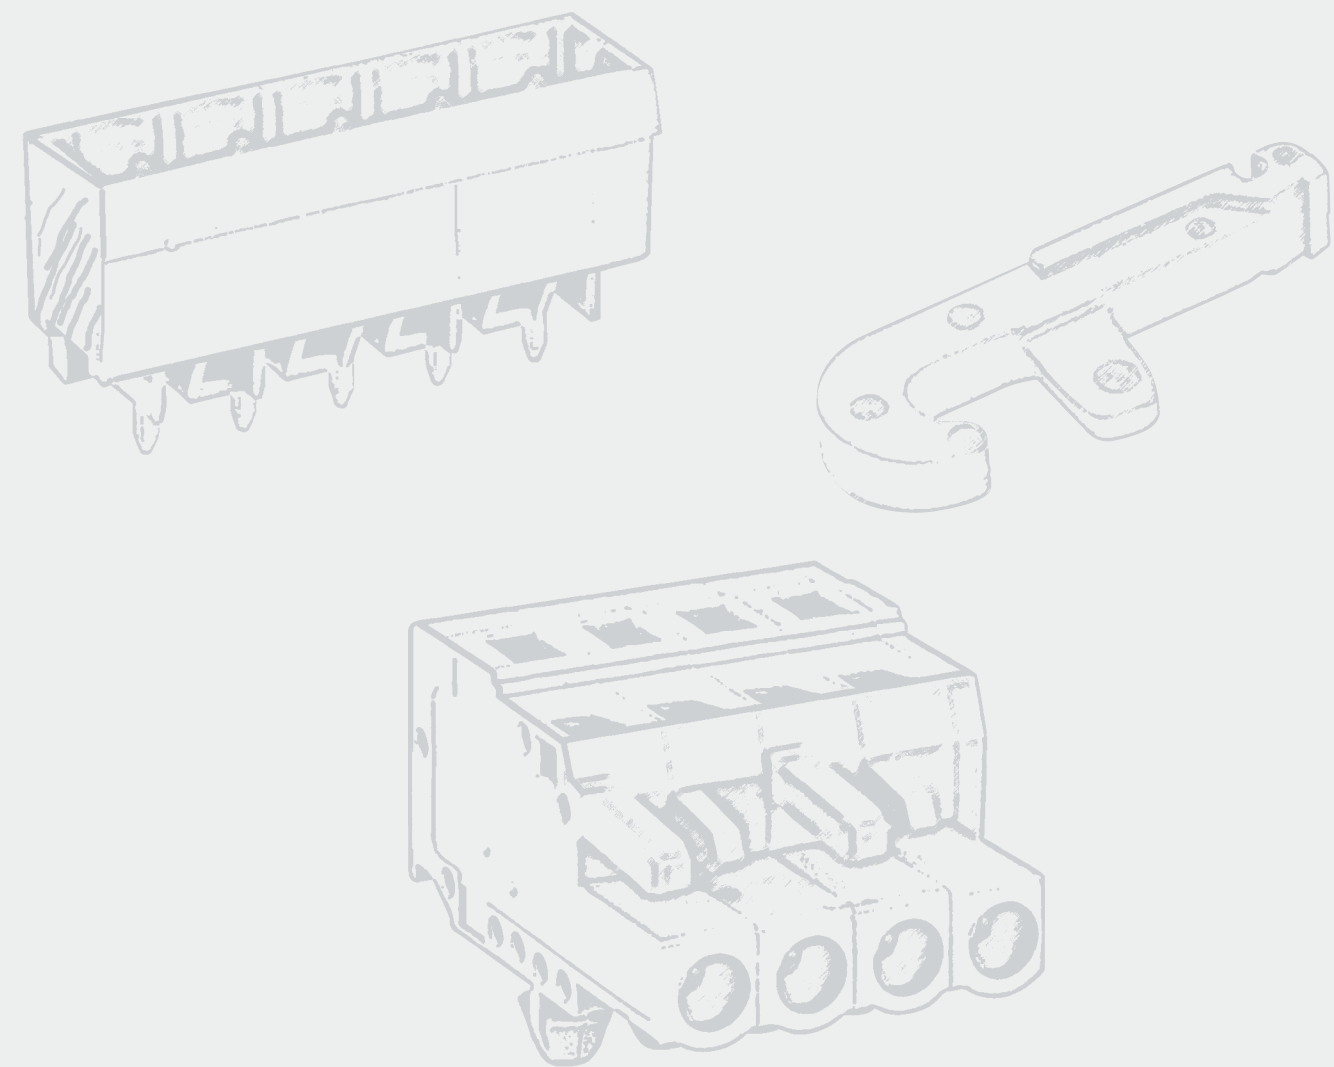

How to order

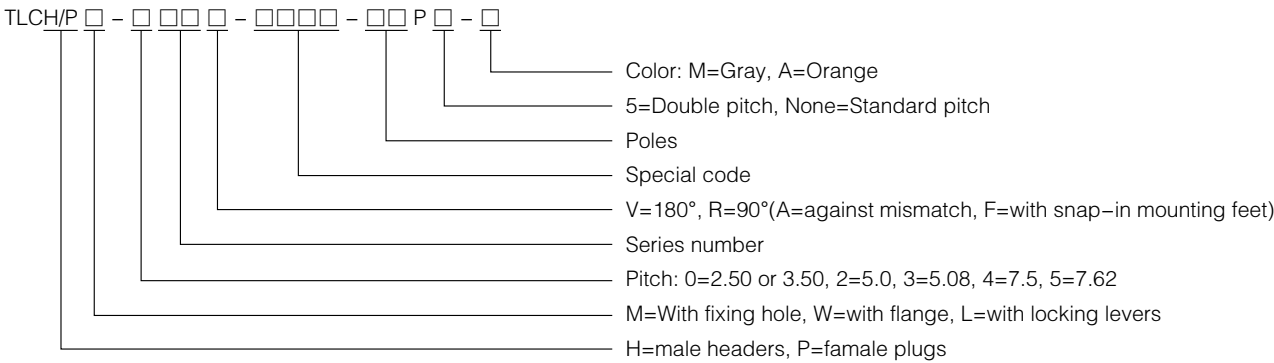



TLCH-002V

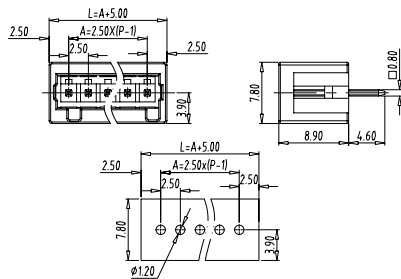

技术数据 Technical data	
Pitch (间距):	2.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	150V 160V
Rated current (电流):	4A 6A
PCB hole Dia(PCB 直径):	Φ 1.2mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCH-002V-02P
:	:
24	TLCH-002V-24P



TLCH-002R



技术数据 Technical data	
Pitch (间距):	2.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	150V 160V
Rated current (电流):	4A 6A
PCB hole Dia(PCB 直径):	Φ 1.2mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCH-002R-02P
:	:
24	TLCH-002R-24P


TLCH-001V(TLCH-100V)

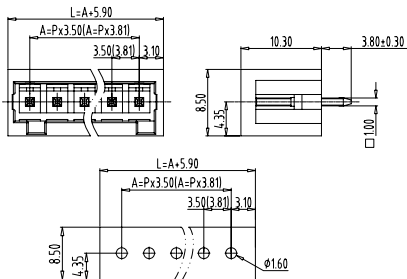

技术数据 Technical data	
Pitch (间距):	3.50mm (3.81mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 160V
Rated current (电流):	12A 10A
PCB hole Dia(PCB 直径):	Φ 1.6mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCH-001V-02P(TLCH-100V-02P)
:	:
24	TLCH-001V-24P(TLCH-100V-24P)



TLCH-001R(TLCH-100R)



技术数据 Technical data	
Pitch (间距):	3.50mm (3.81mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 160V
Rated current (电流):	12A 10A
PCB hole Dia(PCB 直径):	Φ 1.6mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCH-001R-02P(TLCH-100R-02P)
:	:
24	TLCH-001R-24P(TLCH-100R-24P)



TLCH-200V(TLCH-300V)

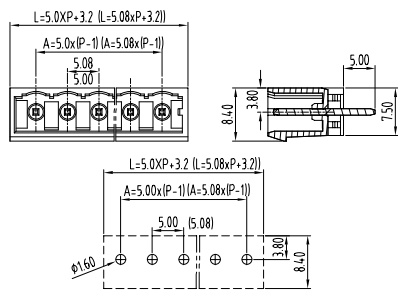

技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
PCB hole Dia(PCB 直径):	Φ 1.6mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCH-200V-02P(TLCH-300V-02P)
:	:
24	TLCH-200V-24P(TLCH-300V-24P)


TLCH-200VA

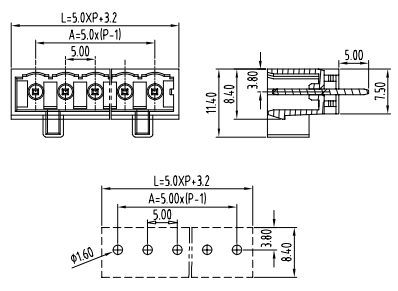

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	UL VDE
Rated voltage (电压):	300V 320V
Rated current (电流):	16Amm 16A
PCB hole Dia(PCB 直径):	Φ 1.6

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCH-200VA-02P
:	:
24	TLCH-200VA-24P


TLCHM-400R(TLCHM-500R)

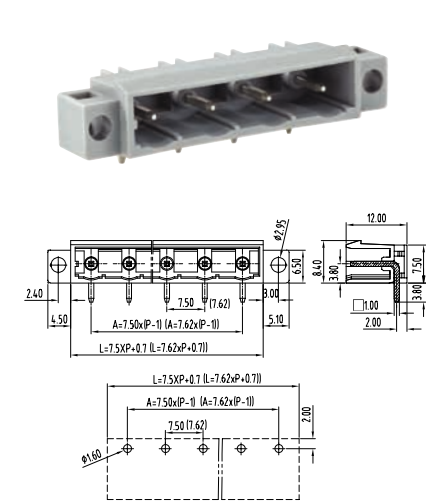

技术数据 Technical data	
Pitch (间距):	7.50mm (7.62mm)
Approval (认证):	 
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
PCB hole Dia(PCB 直径):	Φ1.6

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCHM-400R-02P(TLCHM-500R-02P)
:	:
12	TLCHM-400R-12P(TLCHM-500R-12P)


TLCP-002

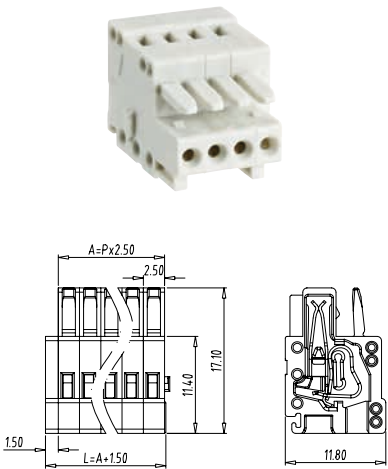

技术数据 Technical data	
Pitch (间距):	2.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	150V 160V
Rated current (电流):	4A 6A
Wire range (线径):	28-20AWG 0.2-0.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCP-002-02P
:	:
24	TLCP-002-24P


TLCP-001(TLCP-100)

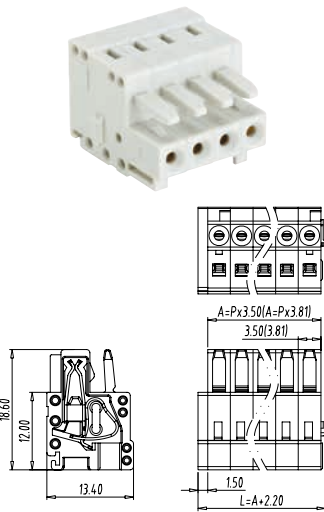

技术数据 Technical data	
Pitch (间距):	3.50mm (3.81mm)
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	12A 10A
Wire range (线径):	28-14AWG 0.2-1.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCP-001-02P(TLCP-100-02P)
:	:
24	TLCP-001-24P(TLCP-100-24P)


TLCP-200F(TLCP-300F)

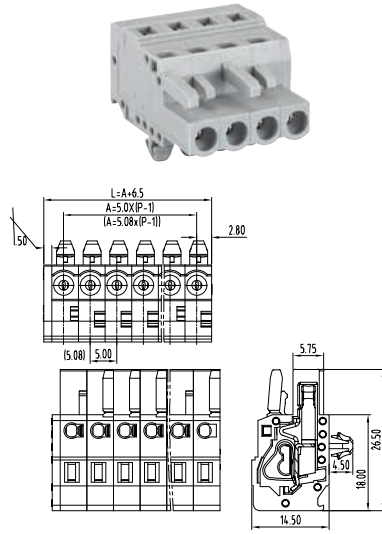

技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCP-200F-02P(TLCP-300F-02P)
:	:
24	TLCP-200F-24P(TLCP-300F-24P)


TLCP-200FA

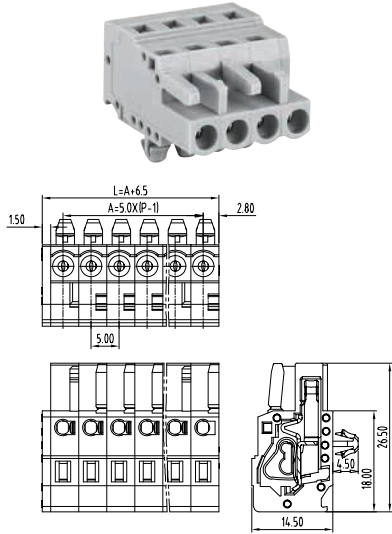

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCP-200FA-02P
:	:
24	TLCP-200FA-24P


TLCPM-200(TLCPM-300)

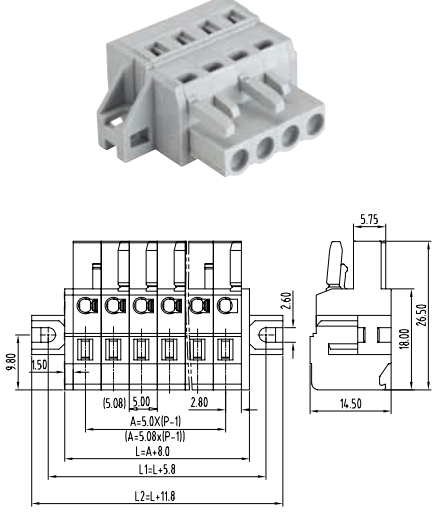

技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCPM-200-02P(TLCPM-300-02P)
:	:
24	TLCPM-200-24P(TLCPM-300-24P)


TLCPL-001(TLCPL-100)

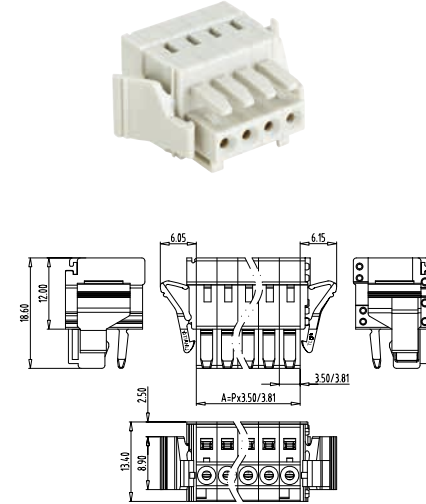

技术数据 Technical data	
Pitch (间距):	3.50mm (3.81mm)
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	12A 10A
Wire range (线径):	28-14AWG 0.2-1.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCPL-001/100-02P
:	:
24	TLCPL-001/100-24P


TLCP-200(TLCP-300)

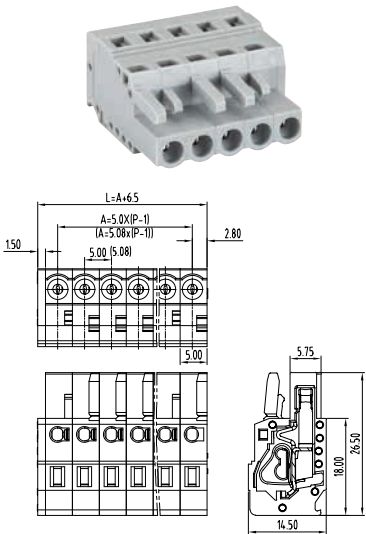

技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCP-200-02P(TLCP-300-02P)
:	:
24	TLCP-200-24P(TLCP-300-24P)


TLCP-200A

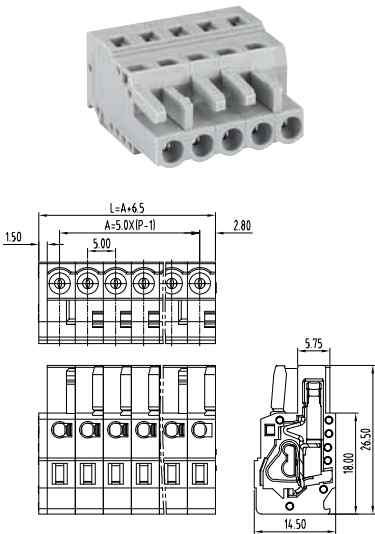

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCP-200A-02P
:	:
24	TLCP-200A-24P


TLCPM-200A

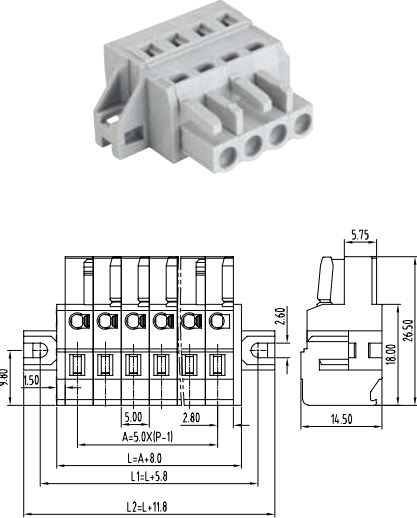

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCPM-200A-02P
:	:
24	TLCPM-200A-24P


TLCPL-200(TLCPL-300)

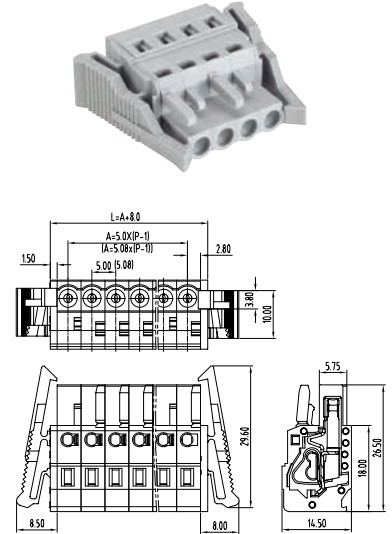

技术数据 Technical data	
Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCPL-200-02P(TLCPL-300-02P)
:	:
24	TLCPL-200-24P(TLCPL-300-24P)


TLCPL-200A

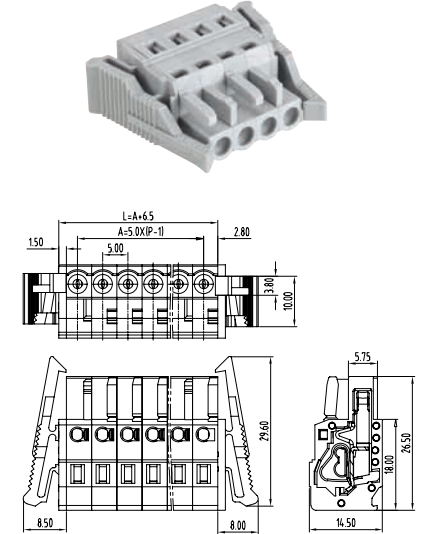

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCPL-200A-02P
:	:
24	TLCPL-200A-24P


TLCPW-300

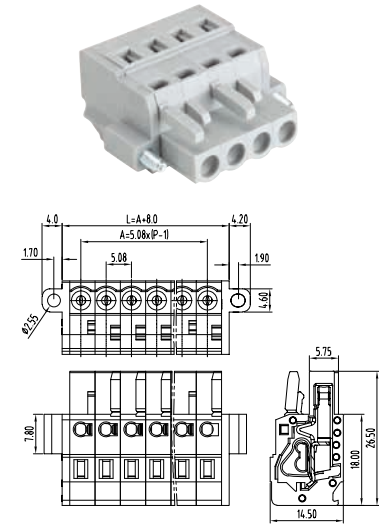

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	 	
Rated voltage (电压):	300V	320V
Rated current (电流):	16A	16A
Wire range (线径):	12~28AWG	0.2~2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCPW-300-02P
:	:
24	TLCPW-300-24P


TLCP-400(TLCP-500)

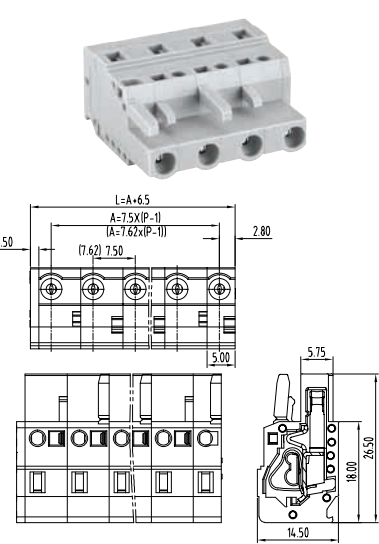

技术数据 Technical data		
Pitch (间距):	7.50mm (7.62mm)	
Approval (认证):	 	
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	16A
Wire range (线径):	12~28AWG	0.2~2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCP-400F-02P(TLCP-500F-02P)
:	:
12	TLCP-400F-12P(TLCP-500F-12P)


TLCP-400A

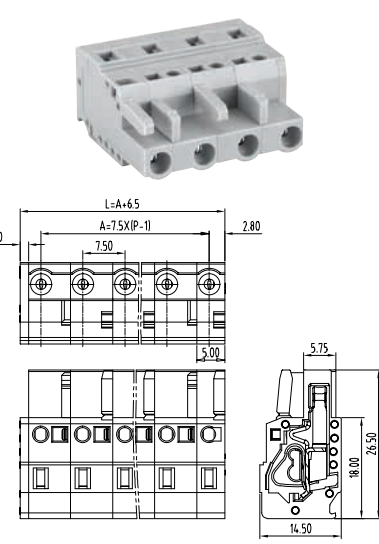

技术数据 Technical data		
Pitch (间距):	7.50mm	
Approval (认证):	 	
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	16A
Wire range (线径):	12~28AWG	0.2~2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCP-400A-02P
:	:
12	TLCP-400A-12P


TLCPM-400A

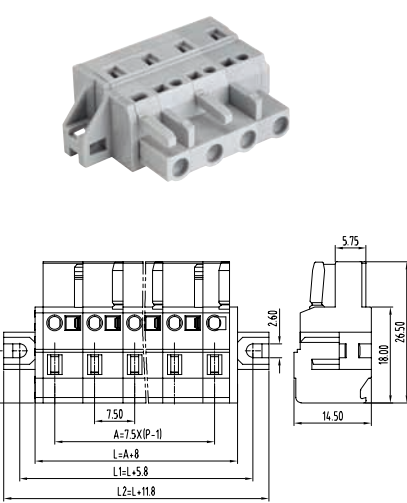

技术数据 Technical data		
Pitch (间距):	7.50mm	
Approval (认证):	 	
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	16A
Wire range (线径):	12~28AWG	0.2~2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCPM-400A-02P
:	:
12	TLCPM-400A-12P


TLCPL-400(TLCPL-500)

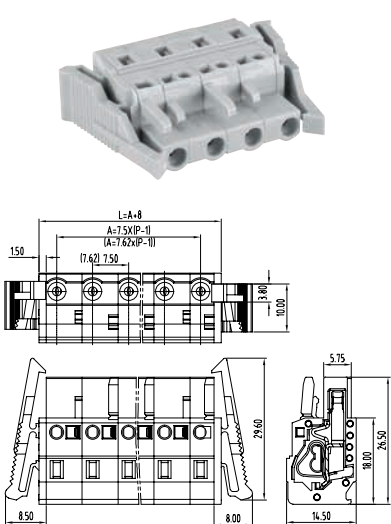

技术数据 Technical data		
Pitch (间距):	7.50mm (7.62mm)	
Approval (认证):	 	
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	16A
Wire range (线径):	12~28AWG	0.2~2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCPL-400-02P(TLCPL-500-02P)
:	:
12	TLCPL-400-12P(TLCPL-500-12P)


TLCPL-400A

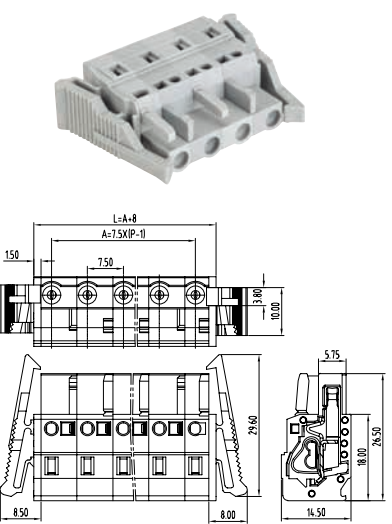

技术数据 Technical data		
Pitch (间距):	7.50mm	
Approval (认证):	 	
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	16A
Wire range (线径):	12~28AWG	0.2~2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCPL-400A-02P
:	:
12	TLCPL-400A-12P


TLCP-400F(TLCP-500F)

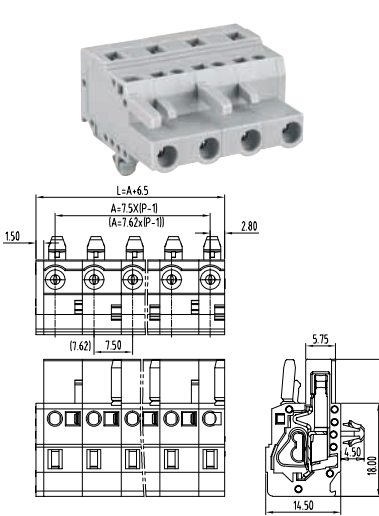

技术数据 Technical data		
Pitch (间距):	7.50mm (7.62mm)	
Approval (认证):	 	
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	16A
Wire range (线径):	12~28AWG	0.2~2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCP-400F-02P(TLCP-500F-02P)
:	:
12	TLCP-400F-12P(TLCP-500F-12P)


TLCP-400FA

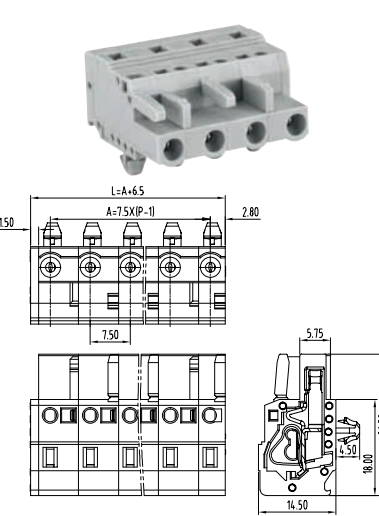

技术数据 Technical data		
Pitch (间距):	7.50mm	
Approval (认证):	 	
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	16A
Wire range (线径):	12~28AWG	0.2~2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCP-400FA-02P
:	:
12	TLCP-400FA-12P


TLCPM-400(TLCPM-500)

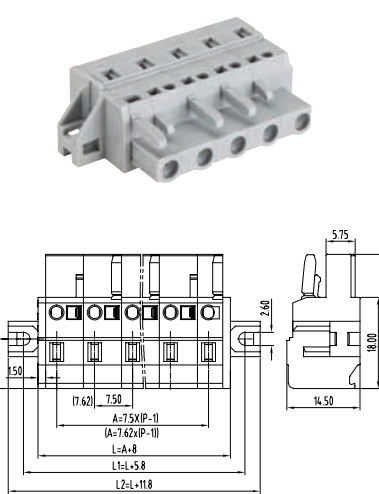

技术数据 Technical data		
Pitch (间距):	7.50mm (7.62mm)	
Approval (认证):	 	
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	16A
Wire range (线径):	12~28AWG	0.2~2.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCPM-400-02P(TLCPM-500-02P)
:	:
12	TLCPM-400-12P(TLCPM-500-12P)


TLCHP-003

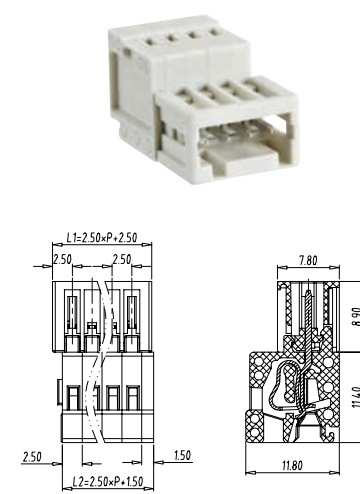

技术数据 Technical data		
Pitch (间距):	2.50mm	
Approval (认证):	UL(Applying) VDE(Applying)	
Rated voltage (电压):	150V	160V
Rated current (电流):	4A	6A
Wire range (线径):	28~20AWG	0.2~0.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCHP-003-02P
:	:
24	TLCHP-003-24P


TLCPM-201

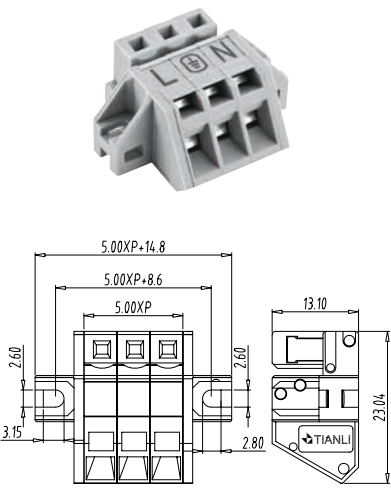

技术数据 Technical data		
Pitch (间距):	5.00mm	
Approval (认证):	UL(Applying)	
Rated voltage (电压):	300V	
Rated current (电流):	16A	
Wire range (线径):	22~12AWG	

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCPM-201-02P
:	:
24	TLCPM-201-24P


TLCHM-202

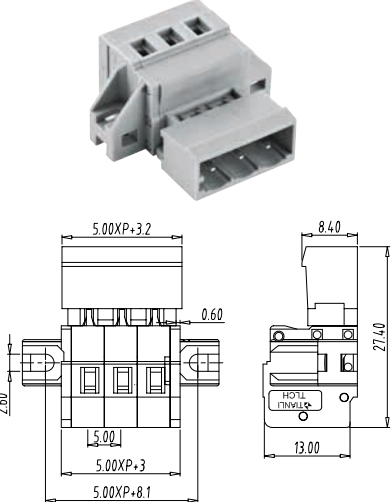


技术数据 Technical data		
Pitch (间距):	5.00mm	
Approval (认证):	UL(Applying)	
Rated voltage (电压):	300V	
Rated current (电流):	16A	
Wire range (线径):	22~12AWG	

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLCHM-202-02P
:	:
24	TLCHM-202-24P

TL SERIES-Wire Protector

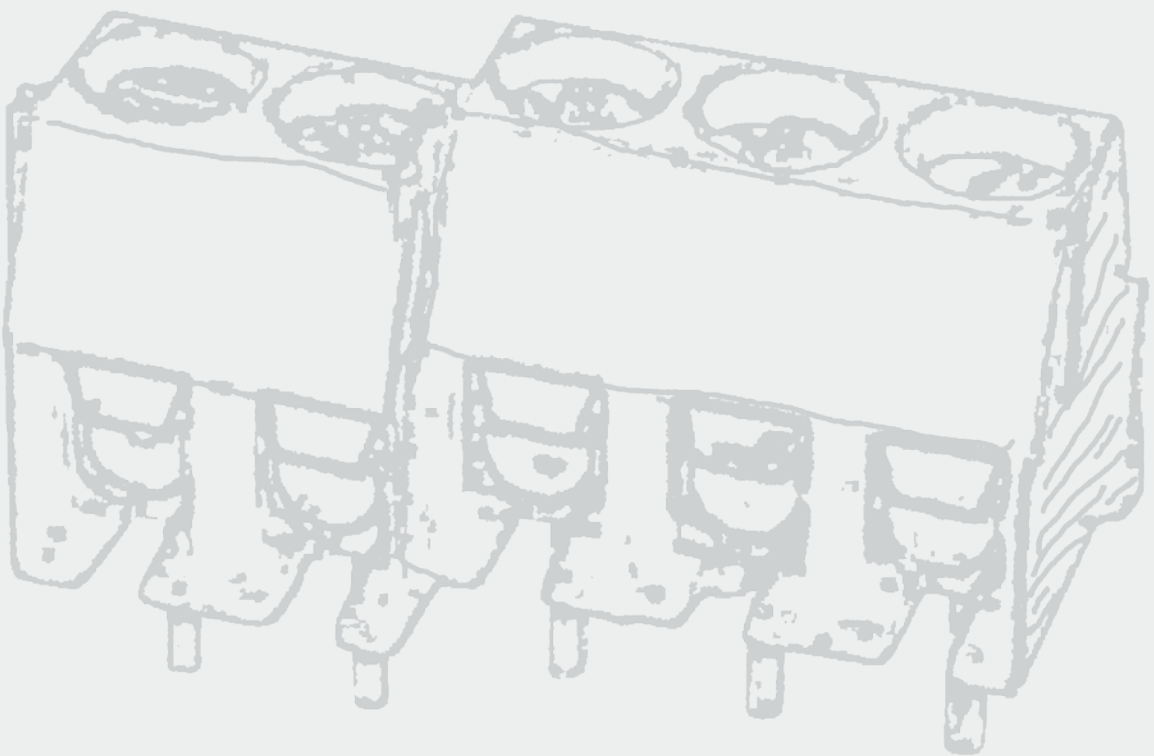

How to order

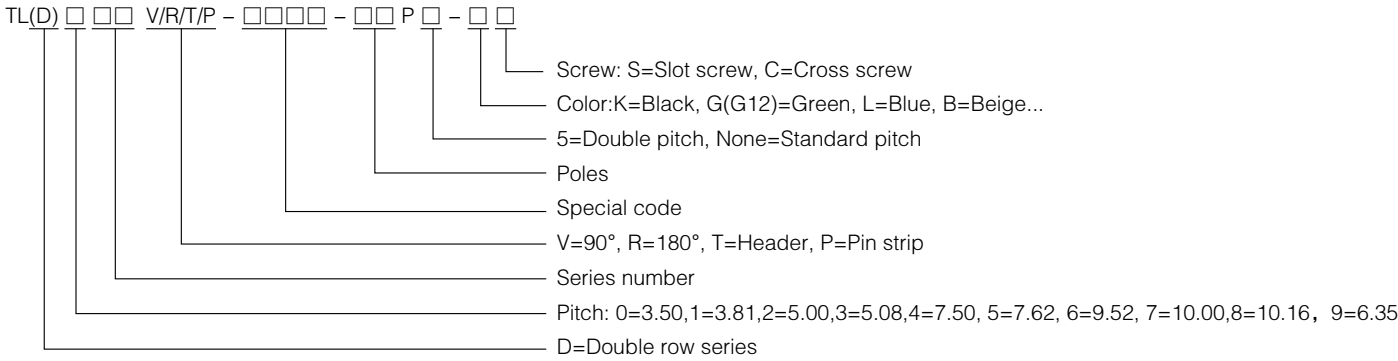

TL SERIES-Wire Protector

ISO9001
ISO14001

REACH


UL US

CE

RoHS


CCC

TL001V(TL100V)

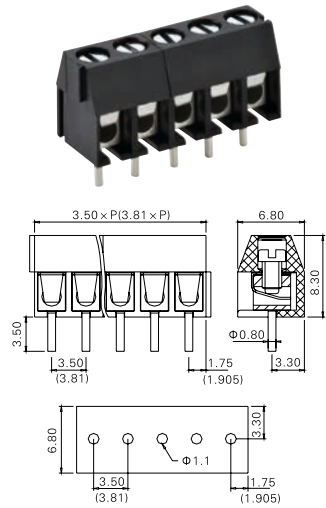


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	24-16AWG
PCB hole Dia(PCB 直径):	Φ 1.1mm
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL001V-02P(TL100V-02P)
:	:
24	TL001V-24P(TL100V-24P)

TL001R(TL100R)

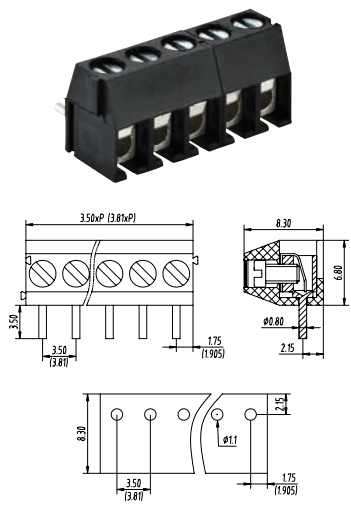


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	24-16AWG
PCB hole Dia(PCB 直径):	Φ 1.1mm
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL001R-02P(TL100R-02P)
:	:
24	TL001R-24P(TL100R-24P)

TL012V

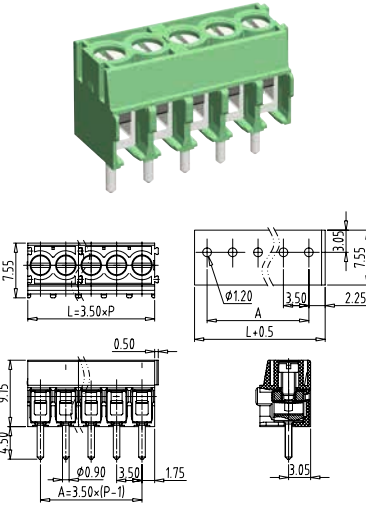


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL(Applying) IEC(Applying)
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	26-16AWG 0.2-1.5mm²
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL012V-XXP
:	:
24	TL012V-XXP

TL012R

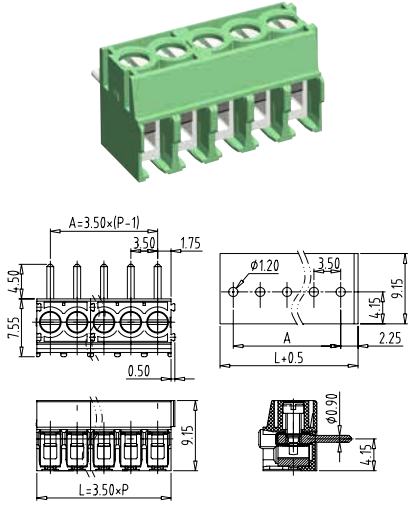


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL(Applying) IEC(Applying)
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	26-16AWG 0.2-1.5mm²
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL012R-XXP
:	:
24	TL012R-XXP

TL012A

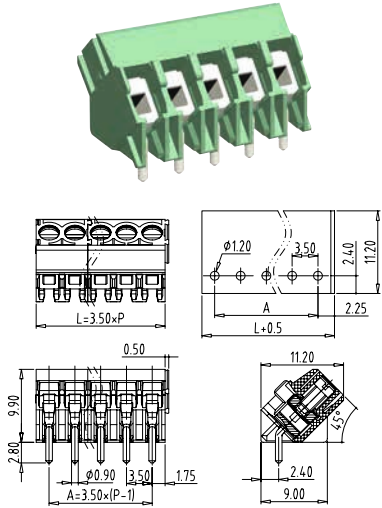


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL(Applying) IEC(Applying)
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	26-16AWG 0.2-1.5mm²
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL012A-XXP
:	:
24	TL012A-XXP

TL012A0

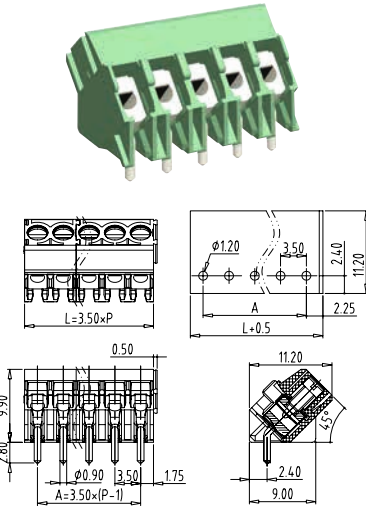


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL(Applying) IEC(Applying)
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 13.5A
Wire range (线径):	22-16AWG(str / sol) 16AWG(sol) 0.34-1mm²
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL012A0-XXP
:	:
24	TL012A0-XXP

TL200V(TL300V)

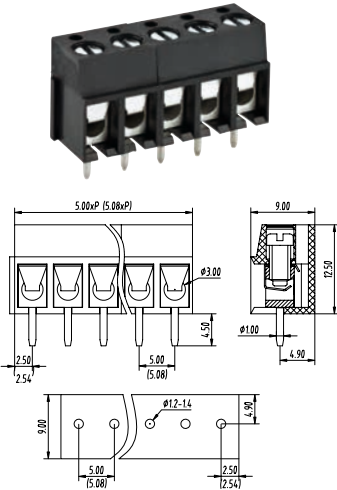


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 250V
Rated current (电流):	15A 24A
Wire range(线径):	22-14AWG 0.5-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.2-1.4mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL200V-02P(TL300V-02P)
:	:
24	TL200V-24P(TL300V-24P)

TL200R(TL300R)

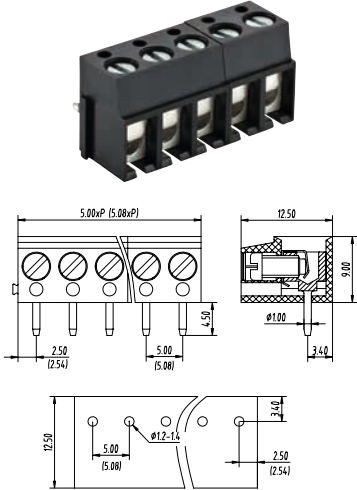


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 250V
Rated current (电流):	15A 24A
Wire range (线径):	22-14AWG 0.5-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.2-1.4mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL200R-02P(TL300R-02P)
:	:
24	TL200R-24P(TL300R-24P)

TL201V(TL301V)

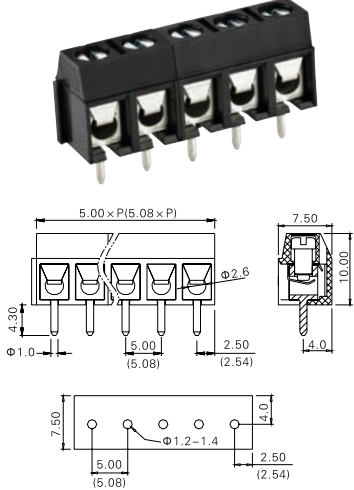


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 250V
Rated current (电流):	16A 16A
Wire range (线径):	20-14AWG 0.34-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.2-1.4mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL201V-02P(TL301V-02P)
:	:
24	TL201V-24P(TL301V-24P)

TL236R

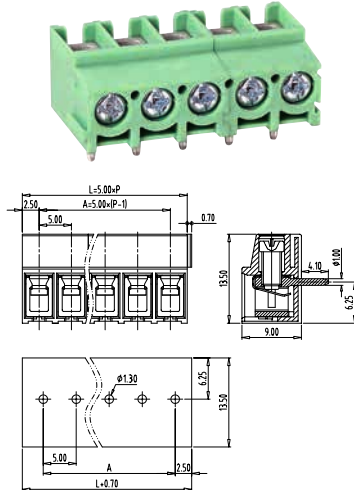


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 32A
Wire range (线径):	20-12AWG 0.5-4mm ²
PCB hole Dia(PCB 直径):	Φ 1.30mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL236R-02P
:	:
24	TL236R-24P

TL203V

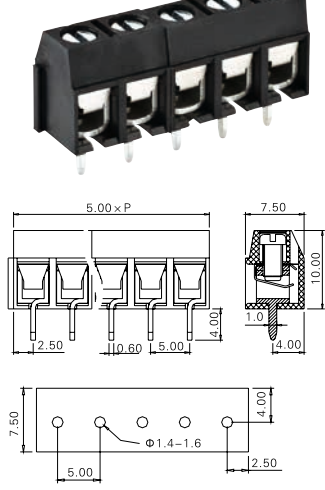


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 250V
Rated current (电流):	16A 16A
Wire range (线径):	26-12AWG 0.5-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.4-1.6mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL203V-02P
:	:
24	TL203V-24P

TL226V

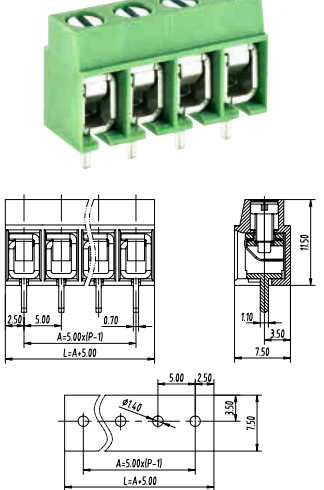


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 24A
Wire range (线径):	30-12AWG 0.2-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.4mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL226V-02P
:	:
24	TL226V-24P

TL201R(TL301R)

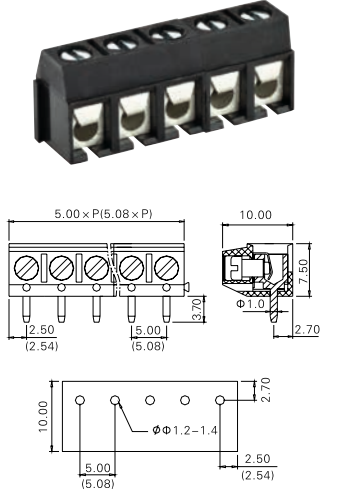


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 130V
Rated current (电流):	16A 16A
Wire range (线径):	20-14AWG 0.34-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.2-1.4mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL201R-02P(TL301R-02P)
:	:
24	TL201R-24P(TL301R-24P)

TL202V

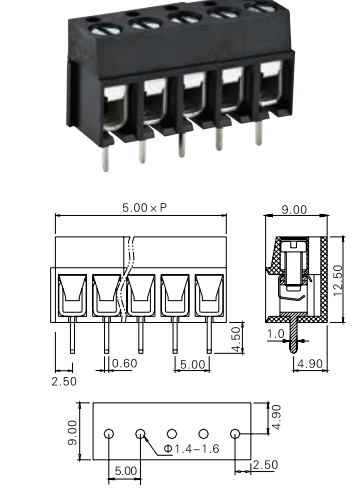


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	16A
Wire range (线径):	22-12AWG
PCB hole Dia(PCB 直径):	Φ 1.4-1.6mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL202V-02P
:	:
24	TL202V-24P

TL236V

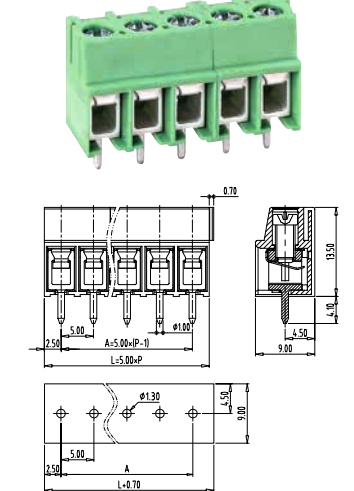


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 32A
Wire range (线径):	20-12AWG 0.5-4mm ²
PCB hole Dia(PCB 直径):	Φ 1.30mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL236V-02P
:	:
24	TL236V-24P

TL006T

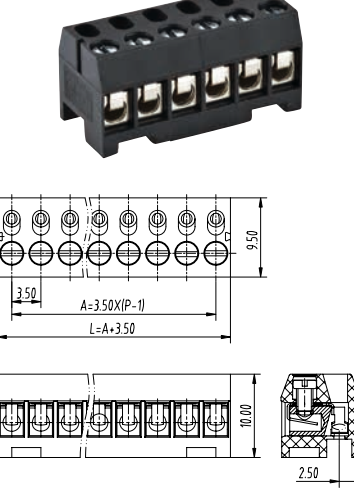


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	28-16AWG
Screw (螺丝):	M2.0
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL006T-02P
:	:
24	TL006T-24P

TL006P

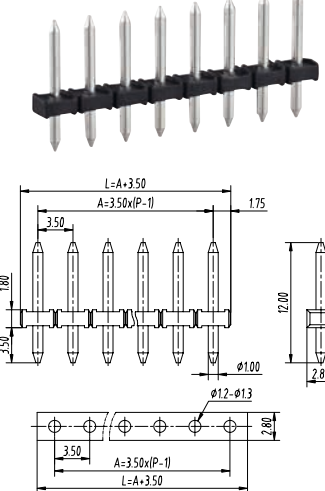


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
PCB hole Dia(PCB 直径):	Φ 1.2-1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL006P-02P
:	:
24	TL006P-24P

TL007P

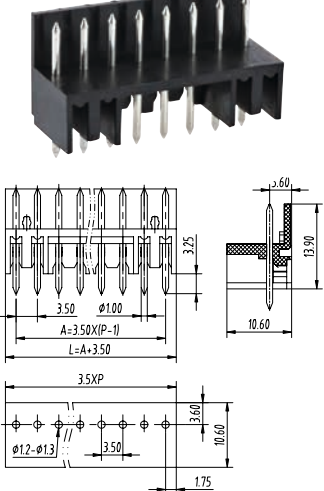

技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
PCB hole Dia(PCB 直径):	Φ 1.2-1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL007P-02P
:	:
24	TL007P-24P


TL205T

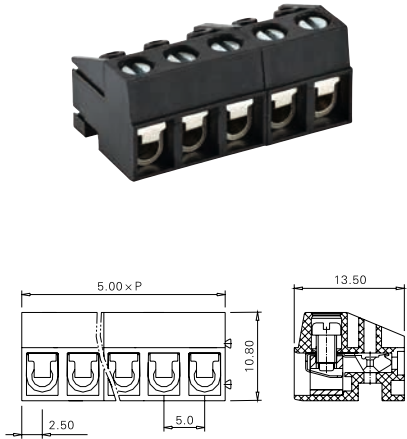

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	20–14AWG
Screw(螺丝):	M2.5

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL205T–02P
:	:
24	TL205T–24P


TL221T

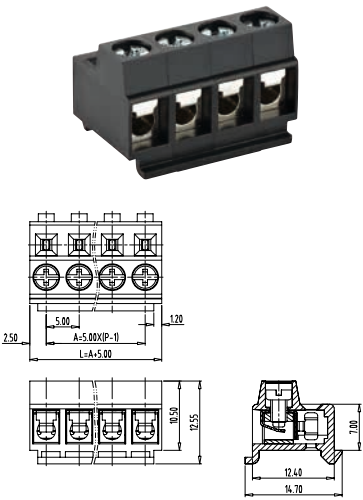

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	10A 12A
Wire range (线径):	24–14AWG 0.34–2.5mm ²
Screw (螺丝):	M2.5

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL221T–02P
:	:
24	TL221T–24P


TL222T

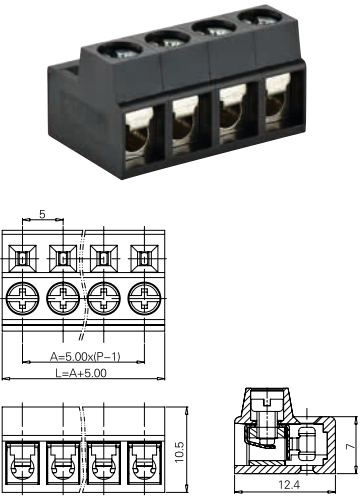

技术数据 Technical data	
Pitch (间距):	5.0mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	24–14AWG
Screw (螺丝):	M2.5

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL222T–02P
:	:
16	TL222T–16P


TL223T

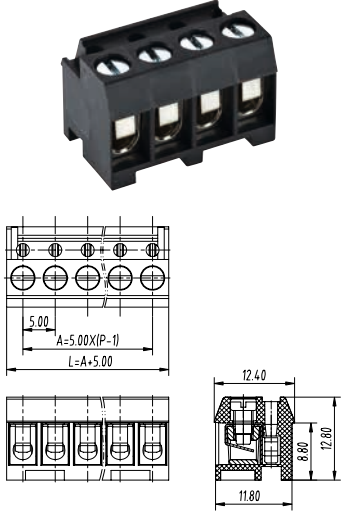

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	12A
Wire range (线径):	26–12AWG
Screw (螺丝):	M3.0

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL223T–02P
:	:
24	TL223T–24P


TL205P

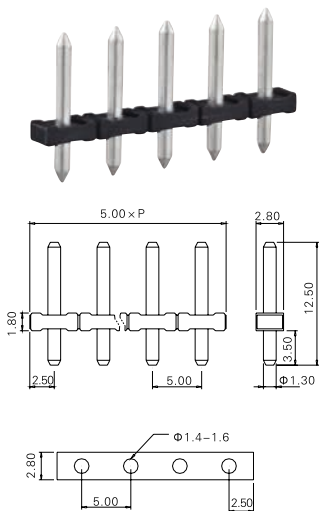

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
PCB hole Dia(PCB 直径):	Φ 1.4–1.6mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL205P–02P
:	:
24	TL205P–24P


TL205P-A019

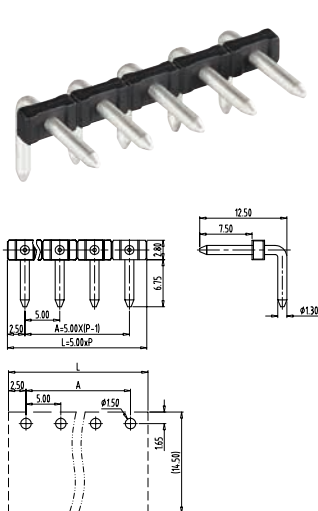

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
PCB hole Dia(PCB 直径):	Φ 1.50mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL205P–A019–02P
:	:
24	TL205P–A019–24P


TL205P-1082

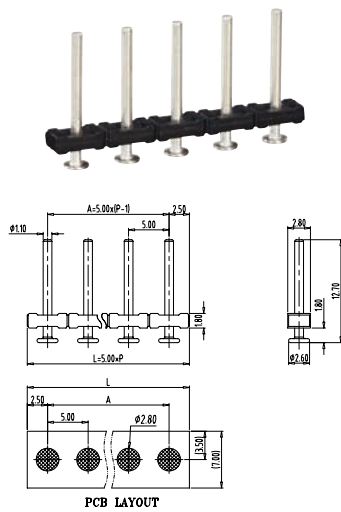

技术数据 Technical data	
Pitch (间距):	5.0mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL205P–1082–02P
:	:
24	TL205P–1082–24P


TL209V

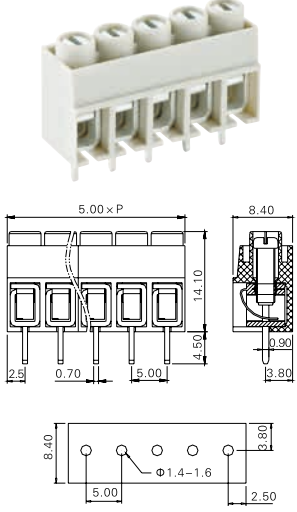

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	250V
Rated current (电流):	15A
Wire range (线径):	22–12AWG
PCB hole Dia(PCB 直径):	Φ 1.4–1.6mm
Screw (螺丝):	M2.5

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL209V–02P
:	:
24	TL209V–24P


TL209R

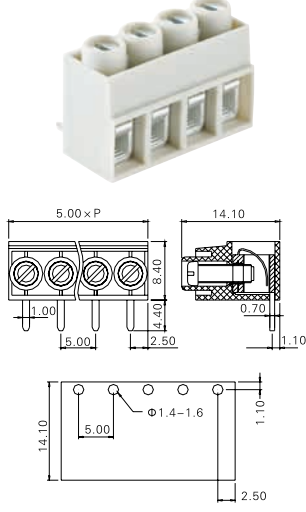

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	250V
Rated current (电流):	15A
Wire range(线径):	22–12AWG
PCB hole Dia(PCB 直径):	Φ 1.4–1.6mm
Screw (螺丝):	M2.5

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL209R–02P
:	:
24	TL209R–24P


TL210

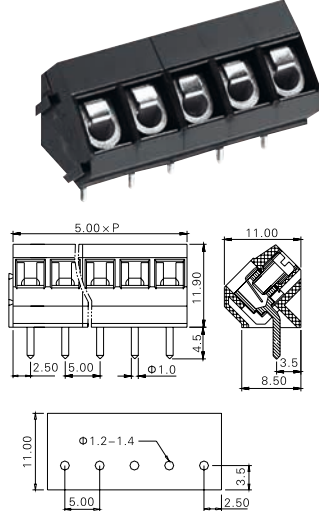

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	15A
Wire range (线径):	22–14AWG
CB hole Dia(PCB 直径):	Φ 1.2–1.4mm
Screw (螺丝):	M2.5

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL210–02P
:	:
24	TL210–24P


TL213-5.0

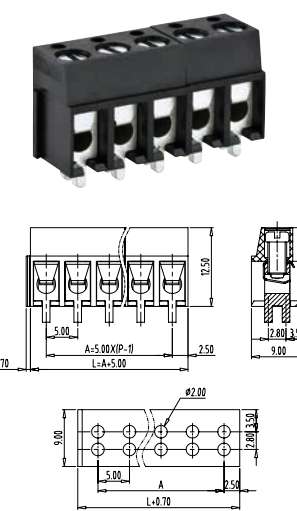

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V VDE(Applying)
Rated current (电流):	20A 20A
Wire range (线径):	24–14AWG 0.5–2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.9–2.2mm
Screw (螺丝):	M3

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL213–5.0–02P
:	:
24	TL213–5.0–24P



TL216

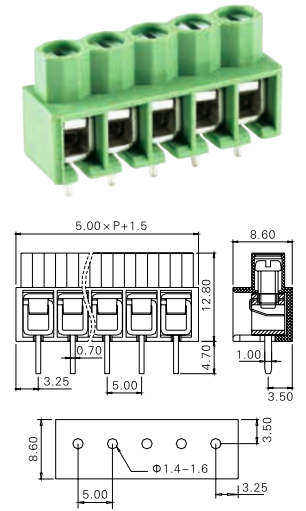

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 450V
Rated current (电流):	12A 12A
Wire range (线径):	18–12AWG 0.75–4mm ²
PCB hole Dia(PCB 直径):	Φ 1.4–1.6mm
Screw (螺丝):	M3


料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL216–02P
:	:
24	TL216–24P

TL400V

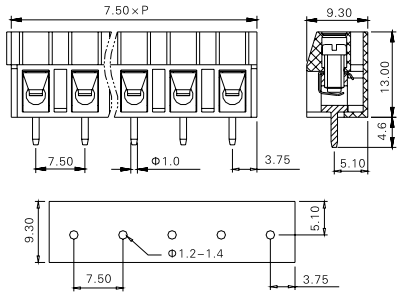


技术数据 Technical data		
Pitch (间距):	7.50mm	
Approval (认证):	 	
Rated voltage (电压):	300V	450V
Rated current (电流):	15A	24A
Wire range (线径):	22-14AWG	0.5-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.2-1.4mm	
Screw (螺丝):	M3	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TL400V-02P	
:	:	
24	TL400V-24P	

TL400R




技术数据 Technical data		
Pitch (间距):	7.50mm	
Approval (认证):	 	
Rated voltage (电压):	300V	450V
Rated current (电流):	15A	24A
Wire range (线径):	22-14AWG	0.5-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.2-1.4mm	
Screw (螺丝):	M3	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TL400R-02P	
:	:	
24	TL400R-24P	

TL523




技术数据 Technical data	
Pitch (间距):	7.62mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	35A
Wire range (线径):	30-8AWG
PCB hole Dia(PCB 直径):	Φ2.1mm
Screw (螺丝):	M4.0
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL523-02P

TL509V

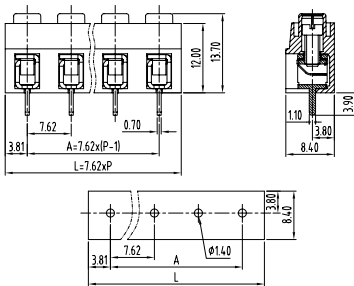


技术数据 Technical data		
Pitch (间距):	7.62mm	
Approval (认证):		VDE(Applying)
Rated voltage (电压):	300V	630V
Rated current (电流):	16A	24A
Wire range(线径):	30-12AWG	0.5-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.4mm	
Screw (螺丝):	M2.5	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TL509V-02P	
:	:	
16	TL509V-16P	

TL SERIES-Raising Clamp

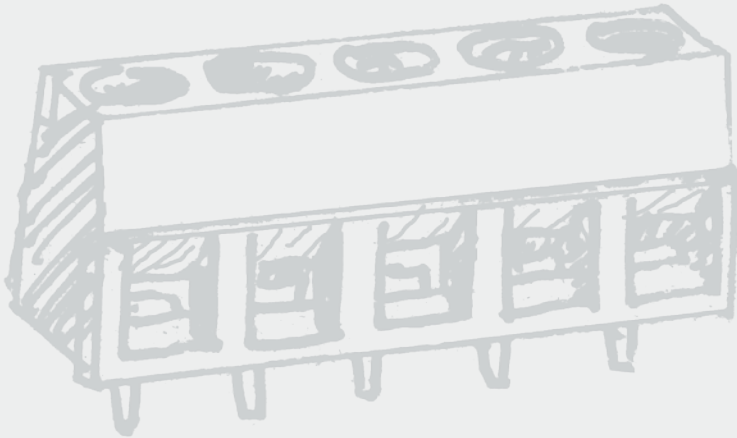


TL Single row series 单层

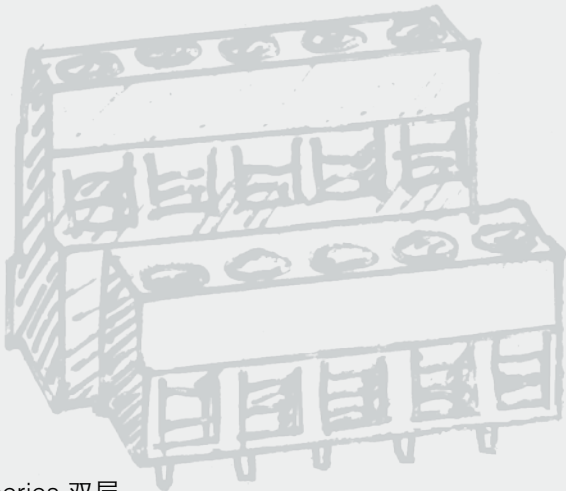


TLD Double row series 双层

How to order

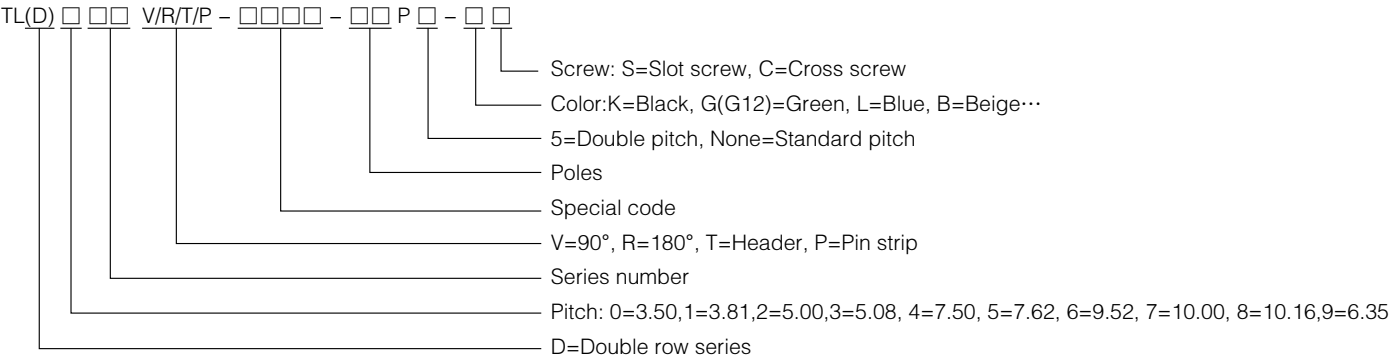


TL SERIES-Raising Clamp

TL011V

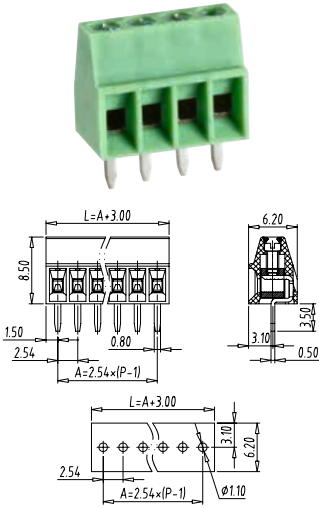


技术数据 Technical data	
Pitch (间距):	2.54mm
Approval (认证):	UL
Rated voltage (电压):	150V 160V
Rated current (电流):	6A 8A
Wire range (线径):	30-18AWG 0.2-1.0mm²
Screw (螺丝):	M1.6
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL011V-02P
:	:
24	TL011V-24P

TL002V

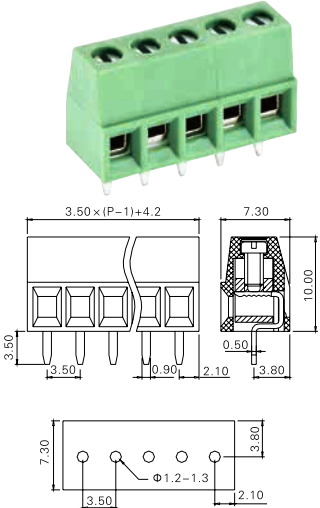


技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL CE
Rated voltage (电压):	300V 130V
Rated current (电流):	10A 10A
Wire range (线径):	26-16AWG 0.2-1.5mm²
PCB hole Dia(PCB 直径):	Φ 1.2-1.3mm
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL002V-02P
:	:
24	TL002V-24P

TL003V(TL103V)

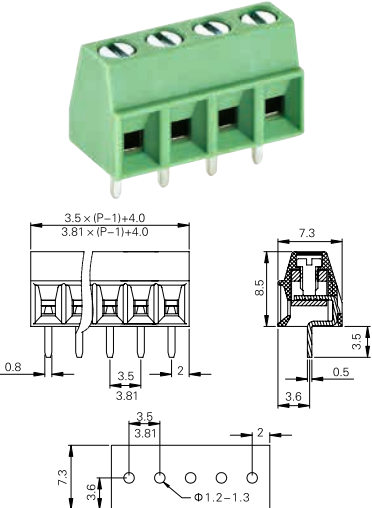


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	26-16AWG
PCB hole Dia(PCB 直径):	Φ 1.2-1.3mm
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL003V-02P(TL103V-02P)
:	:
24	TL003V-24P(TL103V-24P)

TL004V(TL104V)

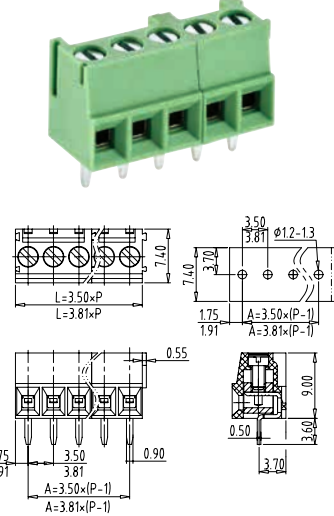


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	26-16AWG
PCB hole Dia(PCB 直径):	Φ 1.2-1.3mm
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL004V-02P(TL104V-02P)
:	:
24	TL004V-24P(TL104V-24P)

TL004R(TL104R)

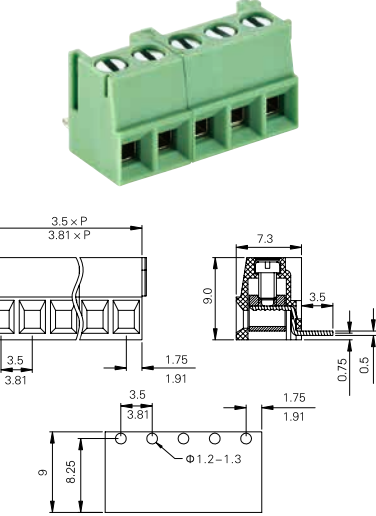



技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	26-16AWG
PCB hole Dia(PCB 直径):	Φ 1.2-1.3mm
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL004R-02P(TL104R-02P)
:	:
24	TL004R-24P(TL104R-24P)

TL009(TL109)

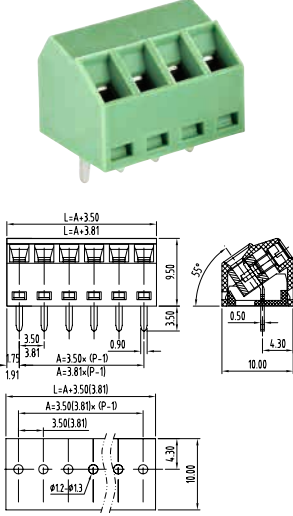


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	12A
Wire range (线径):	30-16AWG
PCB hole Dia(PCB 直径):	Φ 1.2-1.3mm
Screw (螺丝):	M2.0
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL009-02P (TL109-02P)
:	:
24	TL009-24P (TL109-24P)

TL010




技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	26–16AWG
PCB hole Dia(PCB 直径):	Φ 1.2–1.3mm
Screw (螺丝):	M2.0
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL010–02P
:	:
24	TL010–24P

TL204




技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	250V 320V
Rated current (电流):	16A 24A
Wire range (线径):	26–12AWG 0.34–2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL204–02P
:	:
24	TL204–24P

TL207




技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24–12AWG
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL207–02P
:	:
24	TL207–24P

TL206V(TL306V)




技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	24–12AWG 0.2–2.5mm ² sol / str 4mm ² sol
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL206V–02P(TL306V–02P)
:	:
24	TL206V–24P(TL306V–24P)

TL206R(TL306R)





技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	24–12AWG 0.2–2.5mm ² sol / str 4mm ² sol
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL206R–02P(TL306R–02P)
:	:
24	TL206R–24P(TL306R–24P)

TL214V

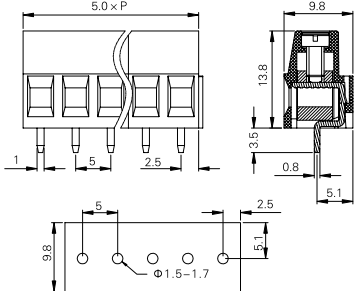


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24–12AWG
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL214V–02P
:	:
24	TL214V–24P

TL231(TL331)




技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	13.5A 15A
Wire range (线径):	26–14AWG 0.2–1.5mm ²
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL231–02P(TL331–02P)
:	:
24	TL231–02P(TL331–24P)

TL219

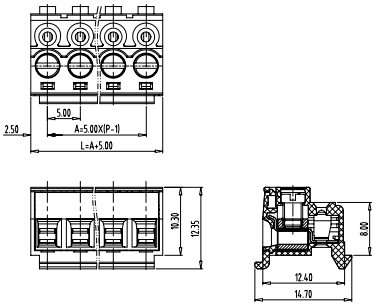


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	12A 12A
Wire range (线径):	28–14AWG 0.2–1.5mm ²
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL219–02P
:	:
24	TL219–24P

TL219T

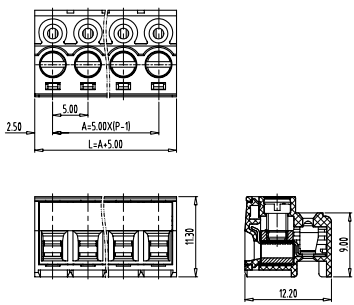


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	12A 12A
Wire range (线径):	28–14AWG 0.2–1.5mm ²
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL219T–02P
:	:
24	TL219T–24P

TL214R

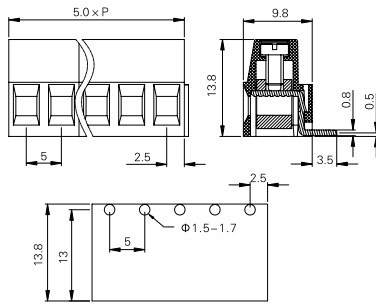


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24–12AWG
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL214R–02P
:	:
24	TL214R–24P

TL208V(TL308V)




技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	15A 15A
Wire range (线径):	26–14AWG 0.34–1.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.3mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL208V–02P(TL308V–02P)
:	:
24	TL208V–24P(TL308V–24P)

TL215V

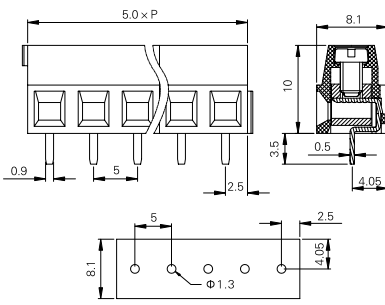


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	15A
Wire range (线径):	26–14AWG
PCB hole Dia(PCB 直径):	Φ 1.3mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL215V–02P
:	:
24	TL215V–24P

TL215R

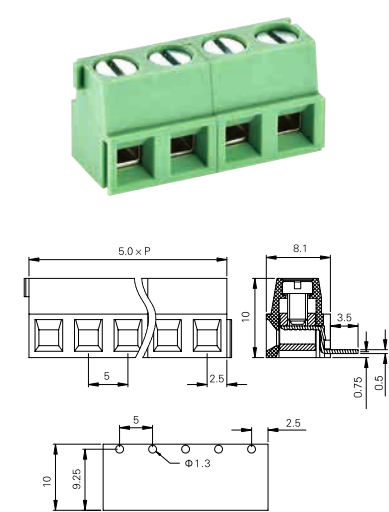


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	15A
Wire range (线径):	26–14AWG
PCB hole Dia(PCB 直径):	Φ 1.3mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL215R-02P
:	:
24	TL215R-24P

TL211V

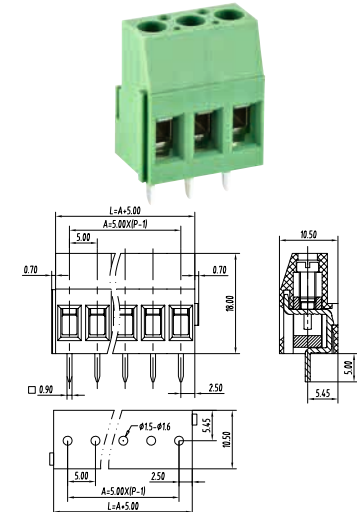


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	25A 32A
Wire range (线径):	22–12AWG 0.24–4mm ²
PCB hole Dia(PCB 直径):	Φ 1.5–1.6mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL211V-02P
:	:
24	TL211V-24P

TL211VH

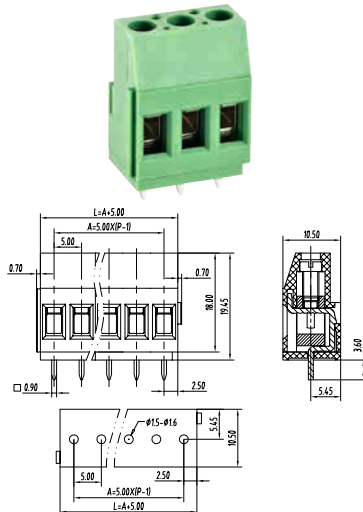


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	25A 32A
Wire range (线径):	22–12AWG 0.24–4mm ²
PCB hole Dia(PCB 直径):	Φ 1.5–1.6mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL211VH-02P
:	:
24	TL211VH-24P

TL217R

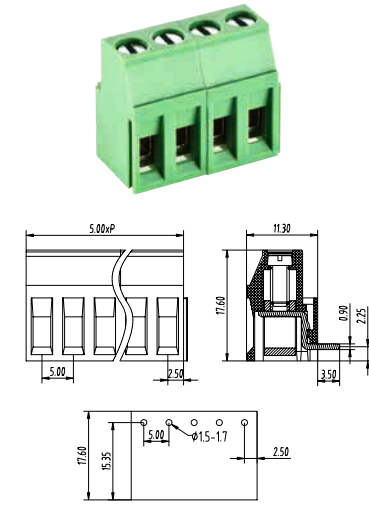


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24–12AWG
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL217R-02P
:	:
24	TL217R-24P

TL217RA

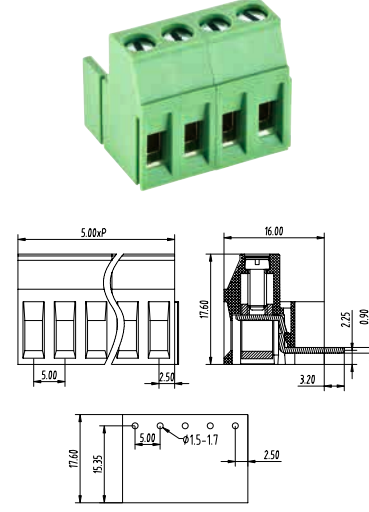


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24–12AWG
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL217RA-02P
:	:
24	TL217RA-24P

TL225V

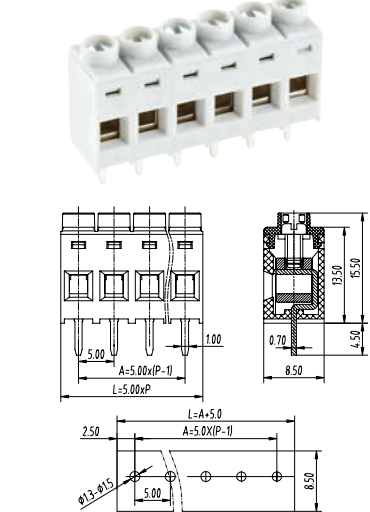


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 24A
Wire range (线径):	28–12AWG 0.2–2.5mm ² Str 0.2–4mm ² Sol
PCB hole Dia(PCB 直径):	Φ 1.3–1.5mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL225V-02P
:	:
24	TL225V-24P

TL212V(TL312V)

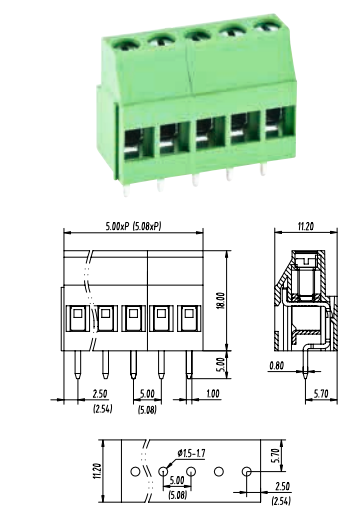


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 300V
Rated current (电流):	20A 20A
Wire range (线径):	24–12AWG 0.34–4mm ²
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL212V-02P(TL312V-02P)
:	:
24	TL212V-24P(TL312V-24P)

TL217VA

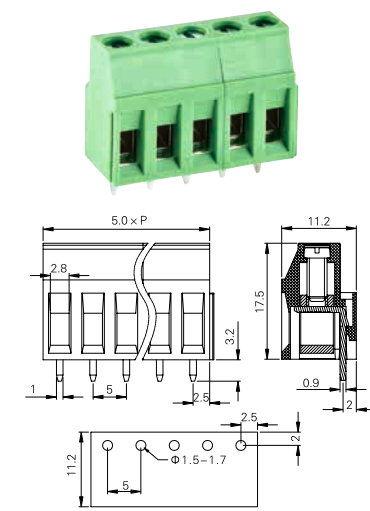


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24–12AWG
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL217VA-02P
:	:
24	TL217VA-24P

TL217V

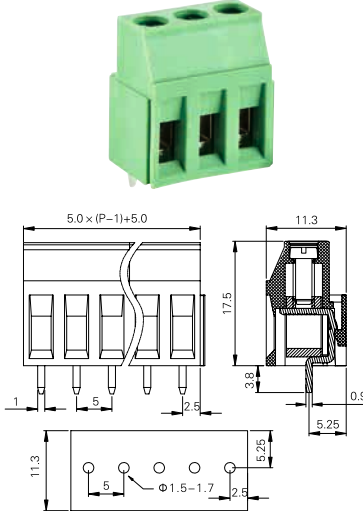


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24–12AWG
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL217V-02P
:	:
24	TL217V-24P

TL225R

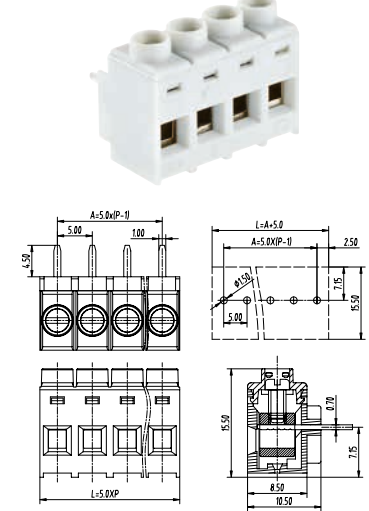


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 24A
Wire range (线径):	28–12AWG 0.2–2.5mm ² Str 0.2–4mm ² Sol
PCB hole Dia(PCB 直径):	Φ 1.3–1.5mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL225R-02P
:	:
24	TL225R-24P

TL227V

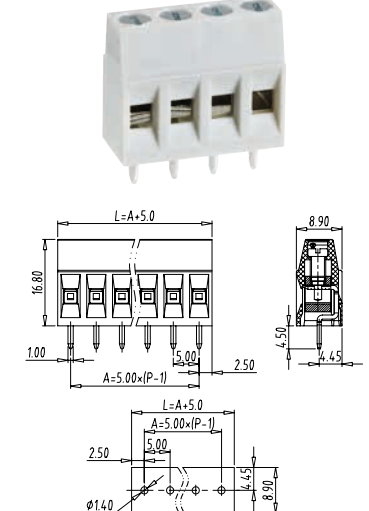



技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	15A 24A
Wire range (线径):	30–14AWG 0.2–2.5mm ²
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL227V-02P
:	:
24	TL227V-24P

TL227R

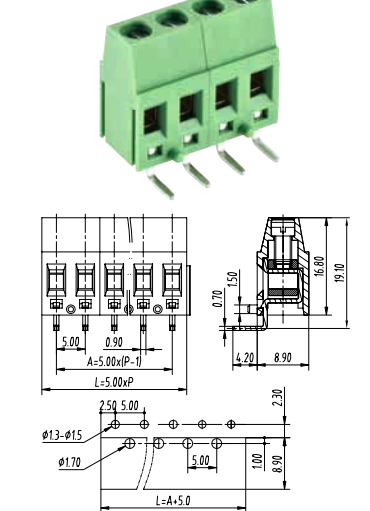

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	30–12AWG 0.2–2.5mm ² sol / str 4mm ² sol
PCB hole Dia(PCB 直径):	Φ 1.3–1.4mm
Screw (螺丝):	M3.0
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL227R-02P
:	:
24	TL227R-24P


TL333



技术数据 Technical data	
Pitch (间距):	5.08mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	24–12AWG 0.2–2.5mm² Sol / Str 4mm² Sol
Screw (螺丝):	M3

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL333–02P
:	:
24	TL333–24P


TL334



技术数据 Technical data	
Pitch (间距):	5.08mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	30–12AWG 0.2–2.5mm²
PCB hole Dia(PCB 直径):	Φ 1.60mm
Screw (螺丝):	M3

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL334–02P
:	:
24	TL334–24P


TLB21-001



技术数据 Technical data	
Pitch (间距):	2.0mm、5.08mm
Rated voltage (电压):	50V
Rated current (S.S):	10A/3A
Wire range (线径):	26–16AWG
PCB hole Dia(PCB 直径):	Φ 1.4–1.5mm/Φ 1.0mm
Screw (螺丝):	M2.5

料号 Part Number	
极数 (Poles)	型号 (Model)
–	TLB21–001
:	:
:	:


TL402R(TL502R)



技术数据 Technical data	
Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	UL (7.62mm Applying) CE (7.62mm Applying)
Rated voltage (电压):	300V 630V
Rated current (电流):	20A 24A
Wire range (线径):	24–12AWG 0.2–2.5mm² Sol / Str 4mm² Sol
Screw (螺丝):	M3

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL402R–02P(TL502R–02P)
:	:
24	TL402R–24P(TL502R–24P)


TL403V(TL503V)



技术数据 Technical data	
Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	28A
Wire range (线径):	28–10AWG
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M3

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL403V–02P(TL503V–02P)
:	:
24	TL403V–24P(TL503V–24P)


TL403R(TL503R)

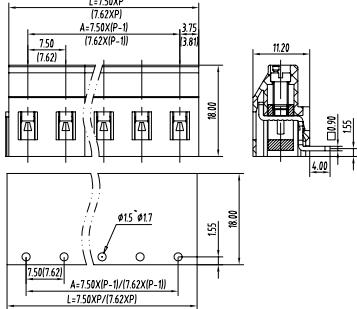

技术数据 Technical data	
Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	28A
Wire range (线径):	28–10AWG
PCB hole Dia(PCB 直径):	Φ 1.5–01.7mm
Screw (螺丝):	M3

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL403R–02P(TL503R–02P)
:	:
24	TL403R–24P(TL503R–24P)


TLB21-003

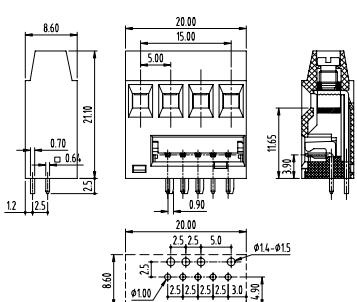

技术数据 Technical data	
Pitch (间距):	2.50mm、5.0mm
Rated voltage (电压):	150V
Rated current (电流):	15A/5A
Wire range (线径):	26–14AWG
PCB hole Dia(PCB 直径):	Φ 1.4–1.5mm/Φ 1.0mm
Screw (螺丝):	M3.0

料号 Part Number	
极数 (Poles)	型号 (Model)
–	TLB21–003
:	:
:	:


TL401V



技术数据 Technical data	
Pitch (间距):	7.50mm
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24–12AWG
PCB hole Dia(PCB 直径):	Φ 2.4–2.6mm
Screw (螺丝):	M3.5

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL401V–02P
:	:
24	TL401V–24P


TL402V(TL502V)



技术数据 Technical data	
Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	UL (7.62mm Applying) CE (7.62mm Applying)
Rated voltage (电压):	300V 630V
Rated current (电流):	20A 24A
Wire range (线径):	24–12AWG 0.2–2.5mm² Sol / Str 4mm² Sol
Screw (螺丝):	M3

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL402V–02P(TL502V–02P)
:	:
24	TL402V–24P(TL502V–24P)


TL414V

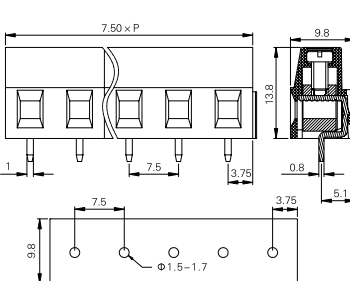

技术数据 Technical data	
Pitch (间距):	7.50mm
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24–12AWG
PCB hole Dia(PCB 直径):	Φ 1.5–1.7mm
Screw (螺丝):	M2.5

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL414V–02P
:	:
24	TL414V–24P


TL414V-1511

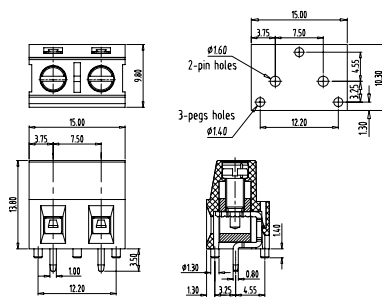

技术数据 Technical data	
Pitch (间距):	7.50mm
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24–12AWG
Screw (螺丝):	M3

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL414V–1511–02P–02P
:	:
:	:


TL414R

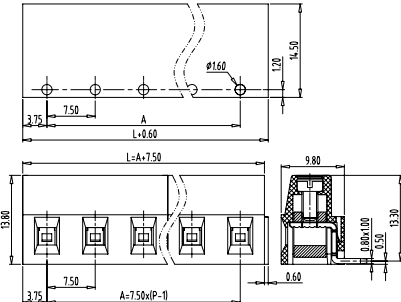

技术数据 Technical data	
Pitch (间距):	7.50mm
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24–12AWG
Screw (螺丝):	M2.5


料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL414R–02P
:	:
16	TL414R–16P

TL802HS

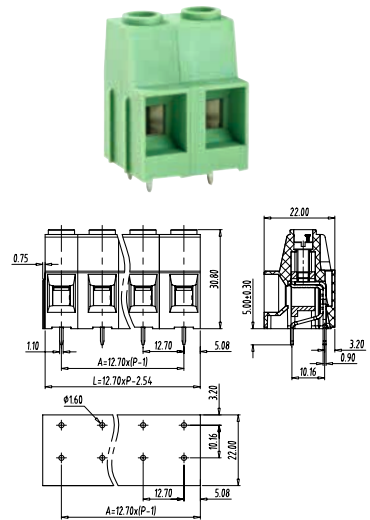


技术数据 Technical data		
Pitch (间距):	12.70mm	
Approval (认证):		
Rated voltage (电压):	600V	1000V
Rated current (电流):	65A	76A
Wire range (线径):	20-6AWG	0.5-16mm ²
PCB hole Dia(PCB 直径):	Φ 1.6mm	
Screw (螺丝):	M4	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TL802HS-02P	
:	:	
16	TL802HS-16P	

TL804S2

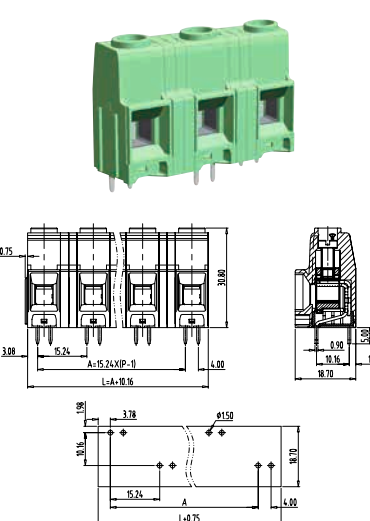


技术数据 Technical data		
Pitch (间距):	15.24mm	
Approval (认证):		
Rated voltage (电压):	600V	1000V
Rated current (电流):	60A	76A
Wire range (线径):	20-6AWG	0.5-16mm ²
PCB hole Dia(PCB 直径):	Φ 1.5mm	
Screw (螺丝):	M4	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TL804S2-02P	
:	:	
16	TL804S2-16P	

TL903

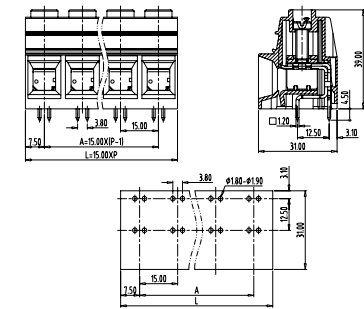


技术数据 Technical data	
Pitch (间距):	15.00mm
Approval (认证):	 
Rated voltage (电压):	600V 1000V
Rated current (电流):	115A 125A
Wire range (线径):	20-2AWG 0.5-35mm ²
PCB hole Dia(PCB 直径):	Φ 1.8mm-Φ 1.9mm
Screw (螺丝):	M5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL903-02P
:	:
12	TL903-12P

TL903M

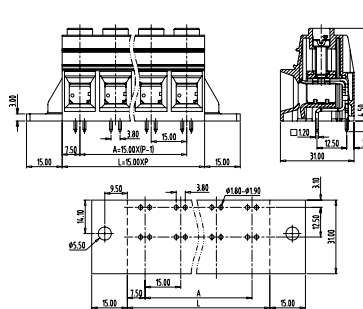


技术数据 Technical data	
Pitch (间距):	15.00mm
Approval (认证):	 
Rated voltage (电压):	600V 1000V
Rated current (电流):	115A 125A
Wire range (线径):	20-2AWG 0.5-35mm ²
PCB hole Dia(PCB 直径):	Φ 1.8mm-1.9mm
Screw (螺丝):	M5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL903M-02P
:	:
10	TL903M-10P

TL903ML

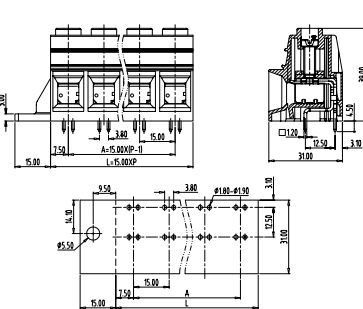


技术数据 Technical data	
Pitch (间距):	15.00mm
Approval (认证):	 
Rated voltage (电压):	600V 1000V
Rated current (电流):	115A 125A
Wire range (线径):	20-2AWG 0.5-35mm ²
PCB hole Dia(PCB 直径):	Φ 1.8mm-1.9mm
Screw (螺丝):	M5
料号 Part Number	
极数 (Poles)	型号 (Model)
01	TL903ML-01P
:	:
10	TL903ML-10P

TL220RA

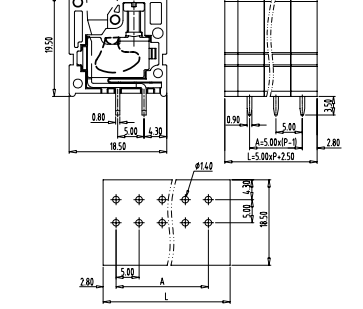


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	28-12AWG 0.34-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.40mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL220RA-02P
:	:
24	TL220RA-24P

TL220VA-00P3

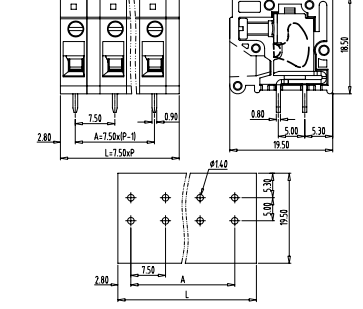


技术数据 Technical data	
Pitch (间距):	7.50mm
Approval (认证):	 
Rated voltage (电压):	300V 630V
Rated current (电流):	20A 24A
Wire range (线径):	28-12AWG 0.34-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.40mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL220VA-00P3-02P
:	:
12	TL220VA-00P3-12P

TL220RA-00P3

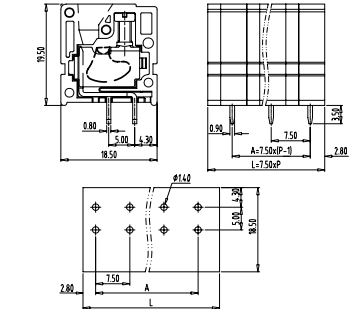


技术数据 Technical data	
Pitch (间距):	7.50mm
Approval (认证):	 
Rated voltage (电压):	300V 630V
Rated current (电流):	20A 24A
Wire range (线径):	28-12AWG 0.34-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.40mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL220RA-00P3-02P
:	:
12	TL220RA-00P3-12P

TL903MR

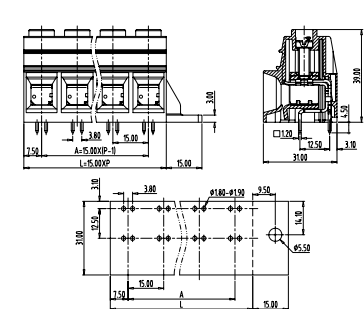


技术数据 Technical data	
Pitch (间距):	15.00mm
Approval (认证):	 
Rated voltage (电压):	600V 1000V
Rated current (电流):	115A 125A
Wire range (线径):	20-2AWG 0.5-35mm ²
PCB hole Dia(PCB 直径):	Φ 1.8mm-1.9mm
Screw (螺丝):	M5
料号 Part Number	
极数 (Poles)	型号 (Model)
01	TL903MR-01P
:	:
10	TL903MR-10P

TL905

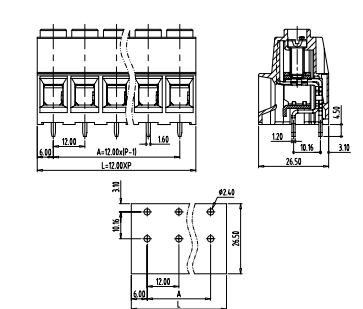



技术数据 Technical data	
Pitch (间距):	12.00mm
Approval (认证):	  VDE(Applying)
Rated voltage (电压):	600V 1000V
Rated current (电流):	85A 101A
Wire range (线径):	20-2AWG 0.5-25mm ²
PCB hole Dia(PCB 直径):	Φ 2.40mm
Screw (螺丝):	M5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL905-02P
:	:
16	TL905-16P

TL220VA

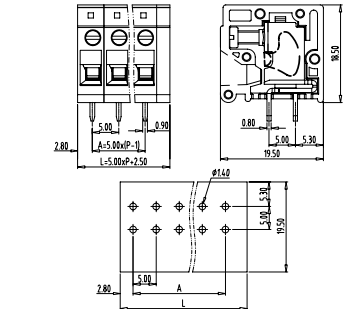



技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	  VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	28-12AWG 0.34-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.40mm
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL220VA-02P
:	:
24	TL220VA-24P

TL705D

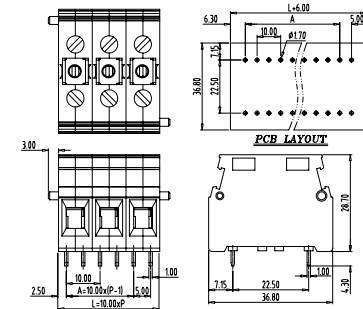



技术数据 Technical data	
Pitch (间距):	10.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	65A 76A
Wire range (线径):	24-6AWG 0.5-16mm ²
PCB hole Dia(PCB 直径):	Φ 1.70mm
Screw (螺丝):	M4.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL705D-02P
:	:
16	TL705D-16P

TL705D-E

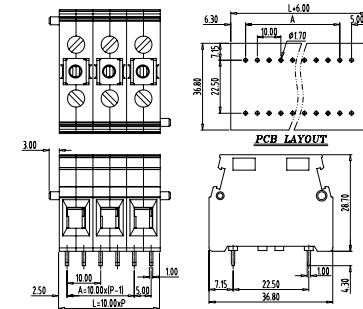


技术数据 Technical data	
Pitch (间距):	10.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	65A 76A
Wire range (线径):	24-6AWG 0.5-16mm ²
PCB hole Dia(PCB 直径):	Φ 1.70mm
Screw (螺丝):	M4.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL705D-E-02P
:	:
16	TL705D-E-16P

TL705DS

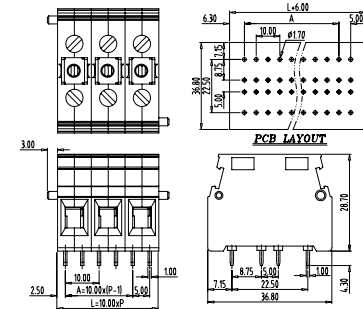

技术数据 Technical data	
Pitch (间距):	10.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	65A 76A
Wire range (线径):	24-6AWG 0.5-16mm ²
PCB hole Dia(PCB 直径):	Φ 1.70mm
Screw (螺丝):	M4.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL705DS-02P
:	:
16	TL705DS-16P


TL332VM

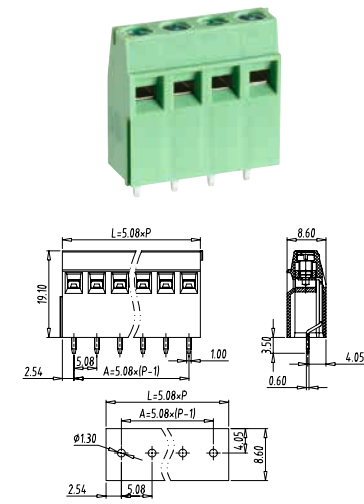

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL	VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	12A	14A
Wire range (线径):	30–14AWG	0.2–1.5mm ²
Screw (螺丝):	M3	

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL332VM-02P
:	:
24	TL332VM-24P


TL332VH2

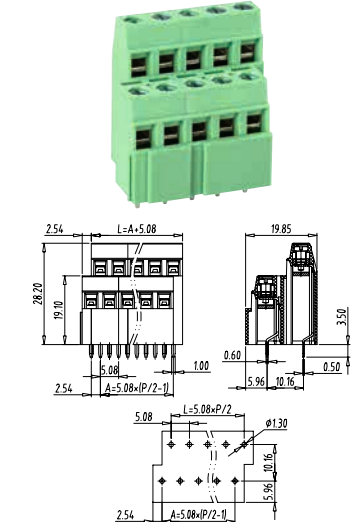

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL	VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	12A	10A
Wire range (线径):	30–14AWG	0.2–1.5mm ²
Screw (螺丝):	M3	

料号 Part Number	
极数 (Poles)	型号 (Model)
04	TL332VH2-04P
:	:
48	TL332VH2-48P


TL332VH3

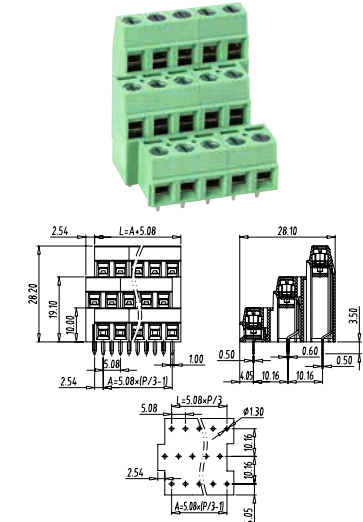

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL	VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	12A	10A
Wire range (线径):	30–14AWG	0.2–1.5mm ²
Screw (螺丝):	M3	

料号 Part Number	
极数 (Poles)	型号 (Model)
06	TL332VH3-06P
:	:
72	TL332VH3-72P


TL338VM2L

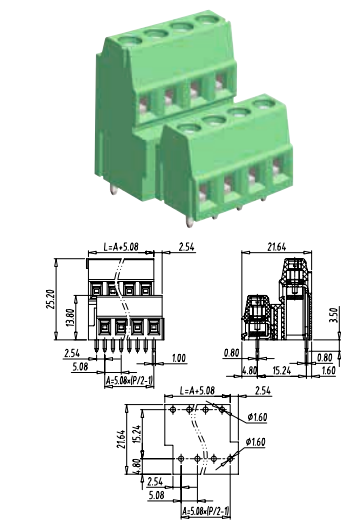

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	20A	18A
Wire range (线径):	28–12AWG	0.2–2.5mm ²
Screw (螺丝):	M3.0	

料号 Part Number	
极数 (Poles)	型号 (Model)
04	TL338VM2L-04P
:	:
48	TL338VM2L-48P


TL338VM2R

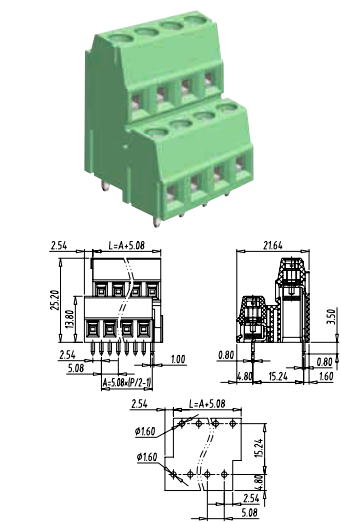

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	20A	18A
Wire range (线径):	28–12AWG	0.2–2.5mm ²
Screw (螺丝):	M3.0	

料号 Part Number	
极数 (Poles)	型号 (Model)
04	TL338VM2R-04P
:	:
48	TL338VM2R-48P


TL338VH2L

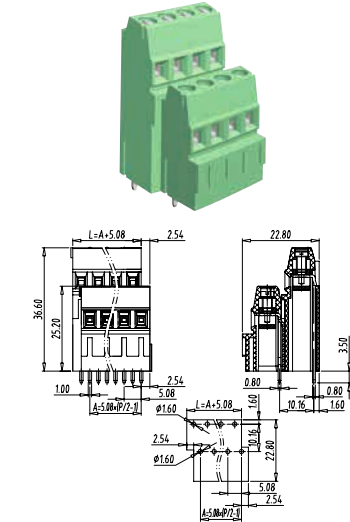

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	20A	18A
Wire range (线径):	28–12AWG	0.2–2.5mm ²
Screw (螺丝):	M3.0	

料号 Part Number	
极数 (Poles)	型号 (Model)
04	TL338VH2L-04P
:	:
48	TL338VH2L-48P


TL338V

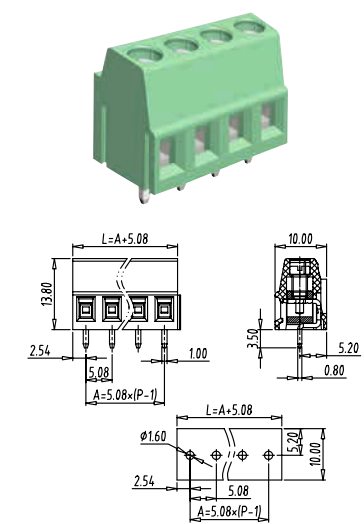

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	20A	24A
Wire range (线径):	28–12AWG	0.2–2.5mm ²
Screw (螺丝):	M3	

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL338V-02P
:	:
24	TL338V-24P


TL338VM

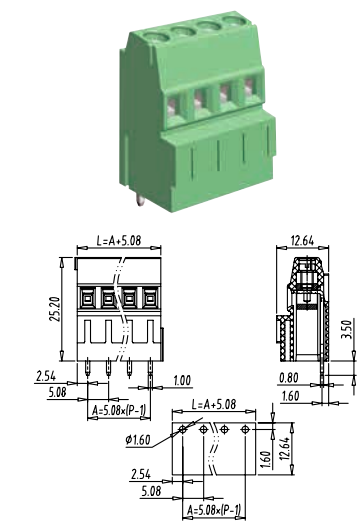

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	20A	24A
Wire range (线径):	28–12AWG	0.2–2.5mm ²
Screw (螺丝):	M3	

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL338VM-02P
:	:
24	TL338VM-24P


TL338VH

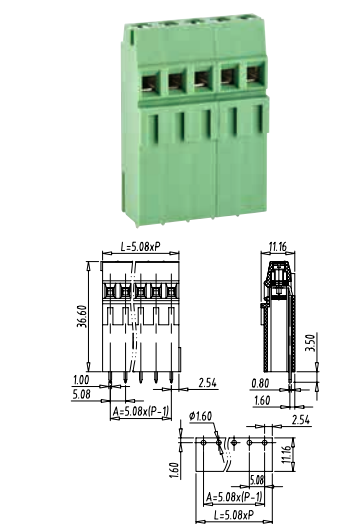

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	20A	24A
Wire range (线径):	28–12AWG	0.2–2.5mm ²
Screw (螺丝):	M3.0	

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TL338VH-02P
:	:
24	TL338VH-24P


TL338VH2R

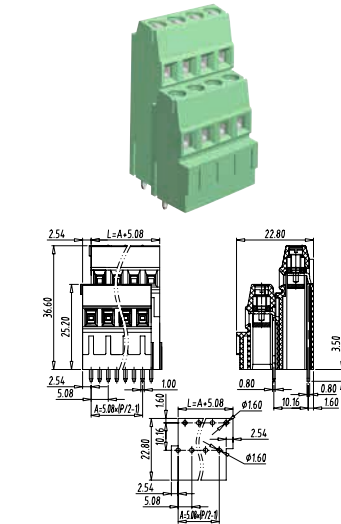

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	20A	18A
Wire range (线径):	28–12AWG	0.2–2.5mm ²
Screw (螺丝):	M3.0	

料号 Part Number	
极数 (Poles)	型号 (Model)
04	TL338VH2R-04P
:	:
48	TL338VH2R-48P


TL338VH3L

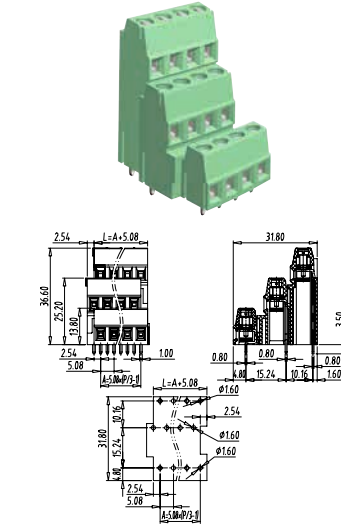

技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	20A	18A
Wire range (线径):	28–12AWG	0.2–2.5mm ²
Screw (螺丝):	M3.0	

料号 Part Number	
极数 (Poles)	型号 (Model)
06	TL338VH3L-06P
:	:
72	TL338VH3L-72P

TL338VH3R

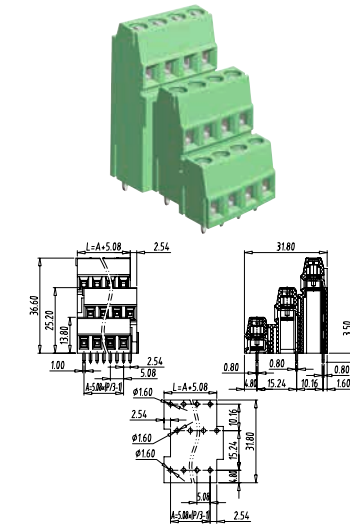



技术数据 Technical data		
Pitch (间距):	5.08mm	
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	320V
Rated current (电流):	20A	18A
Wire range (线径):	28–12AWG	0.2–2.5mm ²
Screw (螺丝):	M3.0	

料号 Part Number	
极数 (Poles)	型号 (Model)
06	TL338VH3R-06P
:	:
72	TL338VH3R-72P

TLM □ □ □ C/D/V/R - □ □ □ □ - □ □ P □ - □ □



Color: M=Gray, G(G12)=Green
5=Double pitch, None=Standard pitch
Poles
Special code
C=Long pin near to side cover, D=Short pin near to side cover, V=180°, R=90°
Series number
Pitch: 0=3.50, 1=3.81, 2=5.00, 3=5.08, 4=7.50, 5=7.62, 6=9.52, 7=10.00, 8=10.16, 9=2.54

TLM-002C(TLM-002C-XP5)




技术数据 Technical data			
Pitch (间距):	3.50mm(7.0mm)		
Approval (认证):			
Rated voltage (电压):	300V	250V	450V
Rated current (电流):	8A	2A	
Wire range (线径):	16~26AWG sol / str 14AWG sol		
		0.5~0.75mm ²	1mm ²
PCB holeDia(PCB直径):	Φ 1.2mm		
料号 Part Number			
极数 (Poles)	型号 (Model)		
02	TLM-002C-02P(TLM-002C-02P5)		
:	:		
24	TLM-002C-24P(TLM-002C-24P5)		

TLM-004VT-3.50(TLM-004VT-3.81) THR




技术数据 Technical data		
Pitch (间距):	3.50mm(3.81mm)	
Approval (认证):	 	
Rated voltage (电压):	300V	160V
Rated current (电流):	10A	17.5A
Wire range (线径):	24~16AWG	0.2~1.5mm ²
PCB holeDia(PCB 直径):	Φ 1.1mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLM-004VT-3.50-02P(TLM-004VT-3.81-02P)	
:	:	
24	TLM-004VT-3.50-24P(TLM-004VT-3.81-24P)	

TLM-004V-3.50(TLM-004V-3.81)

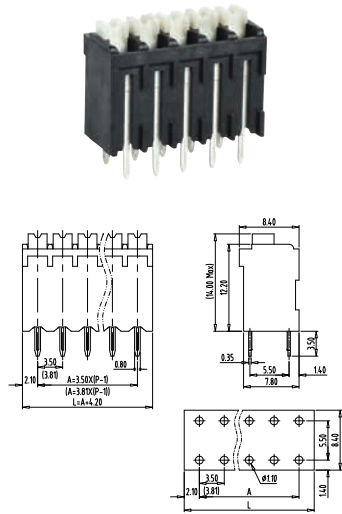


技术数据 Technical data		
Pitch (间距):	3.50mm(3.81mm)	
Approval (认证):		
Rated voltage (电压):	300V	160V
Rated current (电流):	10A	17.5A
Wire range (线径):	24~16AWG	0.2~1.5mm ²
PCB holeDia(PCB 直径):	Φ 1.1mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLM-004V-3.50-02P(TLM-004V-3.81-02P)	
24	TLM-004V-3.50-24P(TLM-004V-3.81-24P)	

TLM-004VT-5.00(TLM-004VT-5.08) THR

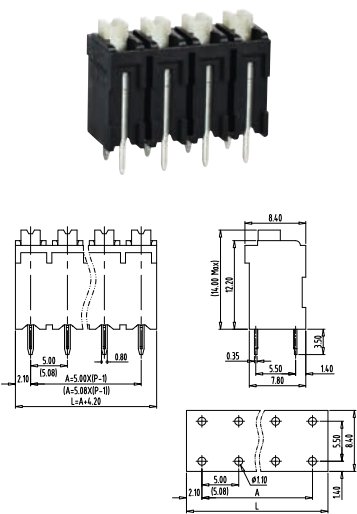


技术数据 Technical data		
Pitch (间距):	5.00mm(5.08mm)	
Approval (认证):	 	
Rated voltage (电压):	300V	160V
Rated current (电流):	10A	17.5A
Wire range (线径):	24-16AWG	0.2-1.5mm ²
PCB holeDia(PCB 直径):	Φ 1.1mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLM-004VT-5.00-02P(TLM-004VT-5.08-02P)	
:	:	
24	TLM-004VT-5.00-24P(TLM-004VT-5.08-24P)	

TLM-004V-5.00(TLM-004V-5.08)

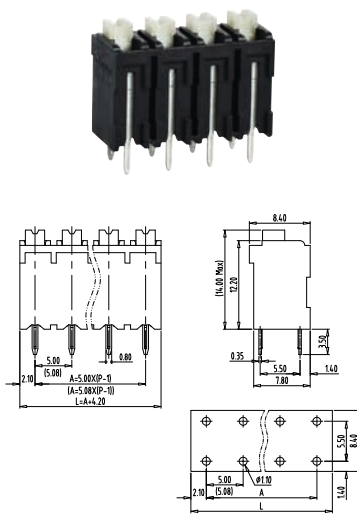


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	24~16AWG 0.2~1.5mm ²
PCB holeDia(PCB 直径):	Φ 1.1mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-004V-5.00-02P(TLM-004V-5.08-02P)
:	:
24	TLM-004V-5.00-24P(TLM-004V-5.08-24P)

TLM-004R-3.50(TLM-004R-5.08)

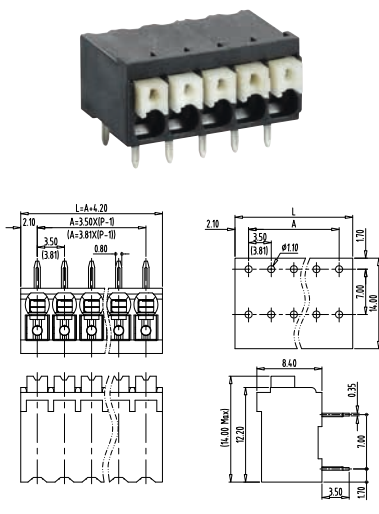


技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	24~16AWG 0.2~1.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.1mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-004R-3.50-02P(TLM-004R-5.08-02P)
:	:
24	TLM-004R-3.50-24P(TLM-004R-5.08-24P)

TLM-004RT-5.00(TLM-004RT-5.08) THR

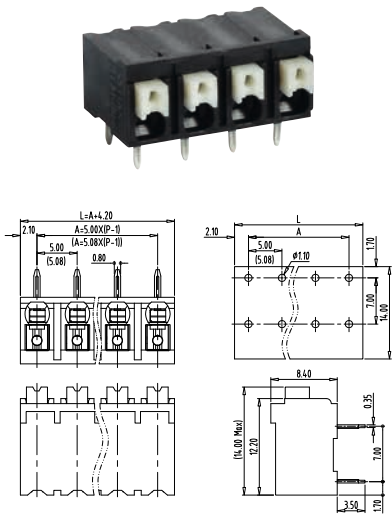


技术数据 Technical data		
Pitch (间距):	5.00mm(5.08mm)	
Approval (认证):	 	
Rated voltage (电压):	300V	160V
Rated current (电流):	10A	17.5A
Wire range (线径):	24-16AWG	0.2-1.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.1mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLM-004RT-5.00-02P(TLM-004RT-5.08-02P)	
:		
24	TLM-004RT-5.00-24P(TLM-004RT-5.08-24P)	

TLM-004R-5.00(TLM-004R-5.08)

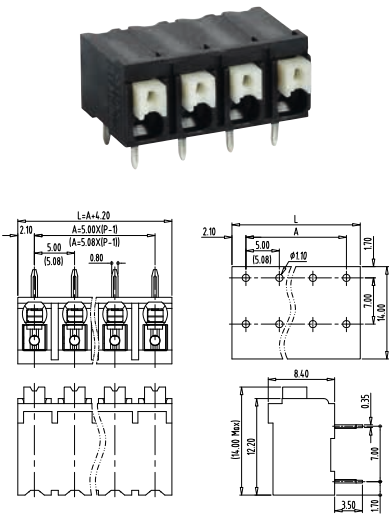


技术数据 Technical data		
Pitch (间距):	5.00mm(5.08mm)	
Approval (认证):	 	
Rated voltage (电压):	300V	160V
Rated current (电流):	10A	17.5A
Wire range (线径):	24-16AWG	0.2-1.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.1mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLM-004R-5.00-02P(TLM-004R-5.08-02P)	
:	:	
24	TLM-004R-5.00-24P(TLM-004R-5.08-24P)	

TLM-004VT-7.62 THR

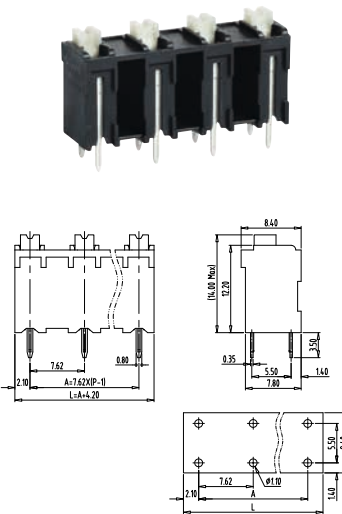


技术数据 Technical data		
Pitch (间距):	7.62mm	
Approval (认证):		
Rated voltage (电压):	300V	630V
Rated current (电流):	10A	17.5A
Wire range (线径):	24-16AWG	0.2-1.5mm ²
PCB holeDia(PCB 直径):	Φ 1.1mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLM-004VT-7.62-02P	
:	:	
16	TLM-004VT-7.62-16P	

TLM-004V-7.62

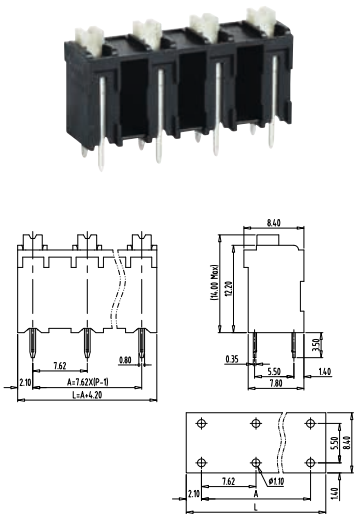


技术数据 Technical data		
Pitch (间距):	7.62mm	
Approval (认证):		
Rated voltage (电压):	300V	630V
Rated current (电流):	10A	17.5A
Wire range (线径):	24-16AWG	0.2-1.5mm ²
PCB holeDia(PCB 直径):	Φ 1.1mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLM-004V-7.62-02P	
:	:	
16	TLM-004V-7.62-16P	

TLM-004RT-3.50(TLM-004RT-3.81) THR

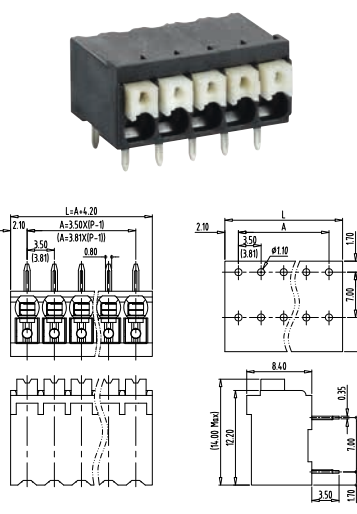


技术数据 Technical data		
Pitch (间距):	3.50mm(3.81mm)	
Approval (认证):	 	
Rated voltage (电压):	300V	160V
Rated current (电流):	10A	17.5A
Wire range (线径):	24-16AWG	0.2-1.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.1mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLM-004RT-3.50-02P(TLM-004RT-3.81-02P)	
:	:	
24	TLM-004RT-3.50-24P(TLM-004RT-3.81-24P)	

TLM-004RT-7.62 THR

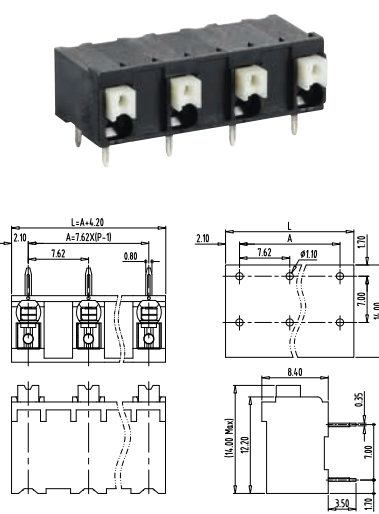


技术数据 Technical data		
Pitch (间距):	7.62mm	
Approval (认证):		
Rated voltage (电压):	300V	630V
Rated current (电流):	10A	17.5A
Wire range (线径):	24-16AWG	0.2-1.5mm ²
PCB hole Dia(PCB直径):	Φ 1.1mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLM-004RT-7.62-02P	
:		
16	TLM-004RT-7.62-16P	

TLM-004R-7.62

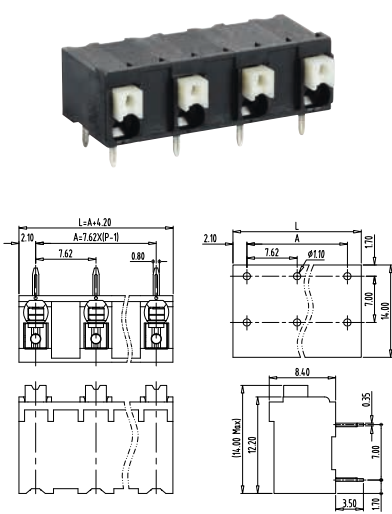


技术数据 Technical data		
Pitch (间距):	7.62mm	
Approval (认证):		
Rated voltage (电压):	300V	630V
Rated current (电流):	10A	17.5A
Wire range (线径):	24-16AWG	0.2-1.5mm ²
PCB hole Dia(PCB直径):	Φ 1.1mm	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLM-004R-7.62-02P	
:	:	
16	TLM-004R-7.62-16P	

TLM-004VS-3.50(TLM-004VS-3.81)

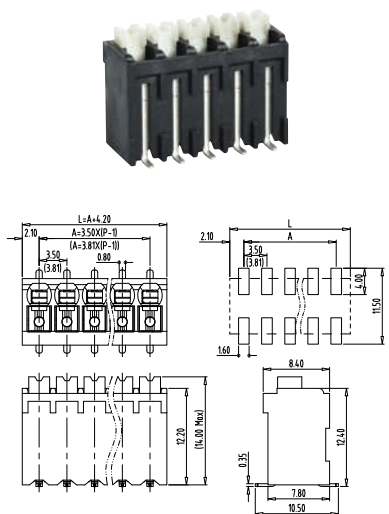

技术数据 Technical data		
Pitch (间距):	3.50mm(3.81mm)	
Approval (认证):		
Rated voltage (电压):	300V	160V
Rated current (电流):	10A	17.5A
Wire range (线径):	24~16AWG	0.2~1.5mm ²
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLM-004VS-3.50-02P(TLM-004VS-3.81-02P)	
:		
24	TLM-004VS-3.50-24P(TLM-004VS-3.81-24P)	


TLM-004VS-5.00(TLM-004VS-5.08)

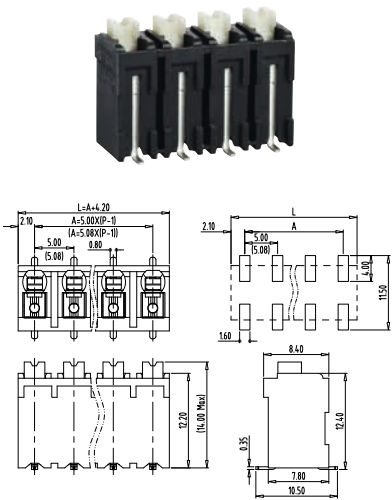

技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	24-16AWG 0.2-1.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-004VS-5.00-02P(TLM-004VS-5.08-02P)
:	:
24	TLM-004VS-5.00-24P(TLM-004VS-5.08-24P)


TLM-004VS-7.62

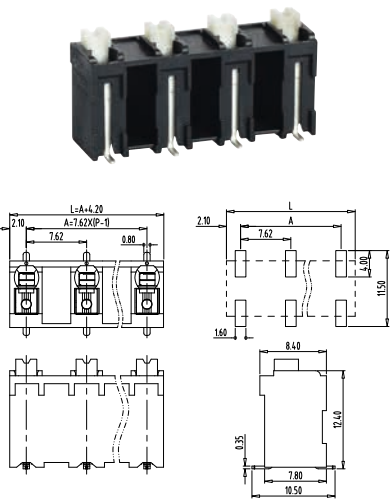

技术数据 Technical data	
Pitch (间距):	7.62mm
Approval (认证):	UL
Rated voltage (电压):	300V 630V
Rated current (电流):	10A 17.5A
Wire range (线径):	24-16AWG 0.2-1.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-004VS-7.62-02P
:	:
16	TLM-004VS-7.62-16P


TLM-004RS-3.50(TLM-004RS-3.81)

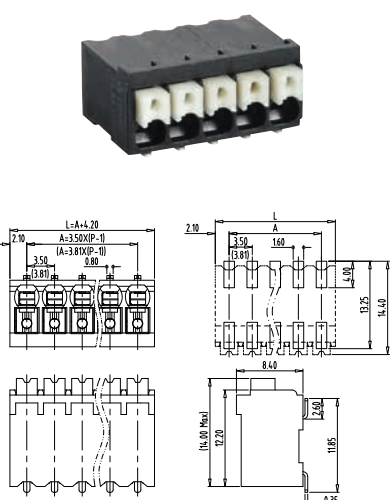

技术数据 Technical data	
Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	24-16AWG 0.2-1.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-004RS-3.50-02P(TLM-004RS-3.81-02P)
:	:
24	TLM-004RS-3.50-24P(TLM-004RS-3.81-24P)


TLM-006-5.00

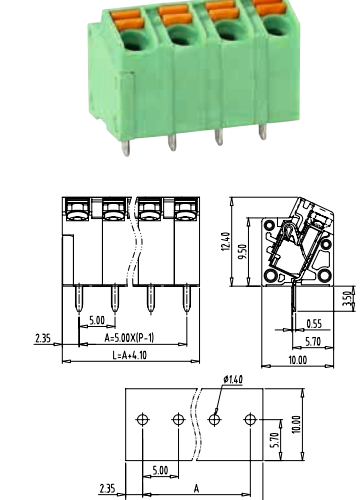

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	10A 17.5A
Wire range (线径):	26-16AWG 0.2-1.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.4mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-006-5.00-02P
:	:
24	TLM-006-5.00-24P


TLM-006A-3.81

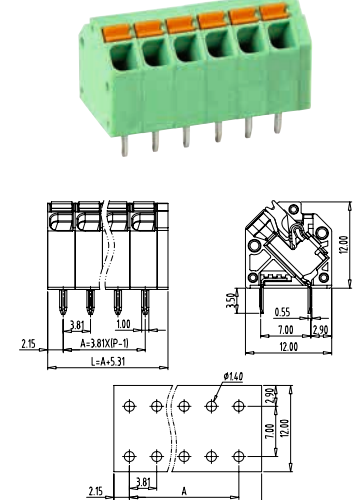

技术数据 Technical data	
Pitch (间距):	3.81mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	26-16AWG 0.2-1.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.4mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-006A-3.81-02P
:	:
24	TLM-006A-3.81-24P


TLM-006A-5.08

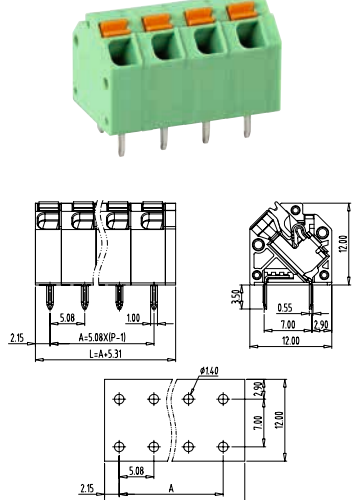

技术数据 Technical data	
Pitch (间距):	5.08mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	10A 17.5A
Wire range (线径):	26-16AWG 0.2-1.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.4mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-006A-5.08-02P
:	:
24	TLM-006A-5.08-24P


TLM-004RS-5.00(TLM-004RS-5.08)

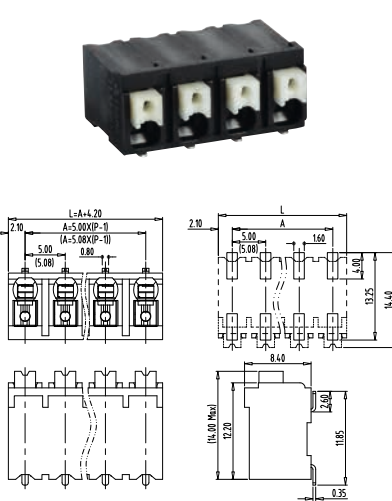

技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	24-16AWG 0.2-1.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-004RS-5.00-02P(TLM-004RS-5.08-02P)
:	:
24	TLM-004RS-5.00-24P(TLM-004RS-5.08-24P)


TLM-004RS-7.62

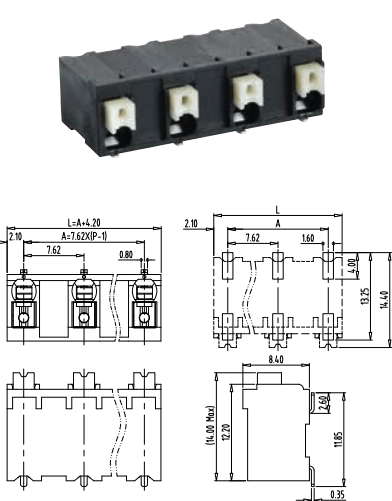

技术数据 Technical data	
Pitch (间距):	7.62mm
Approval (认证):	UL
Rated voltage (电压):	300V 630V
Rated current (电流):	10A 17.5A
Wire range (线径):	24-16AWG 0.2-1.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-004RS-7.62-02P
:	:
16	TLM-004RS-7.62-16P


TLM-006-3.50

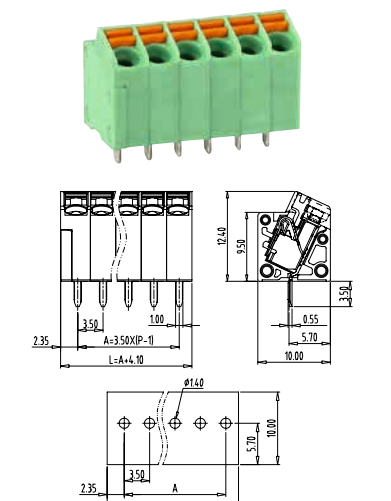

技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	26-16AWG 0.2-1.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.4mm

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-006-3.50-02P
:	:
24	TLM-006-3.50-24P


TLM-012V

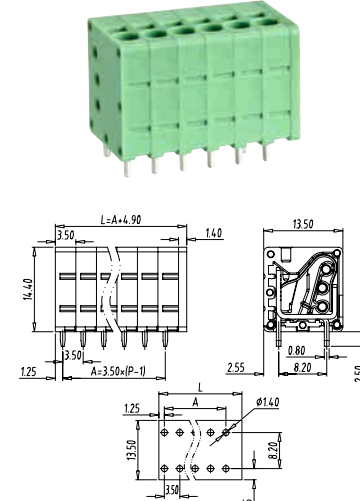

技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	26-16AWG 0.2-1.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-012V-02P
:	:
24	TLM-012V-24P


TLM-012R

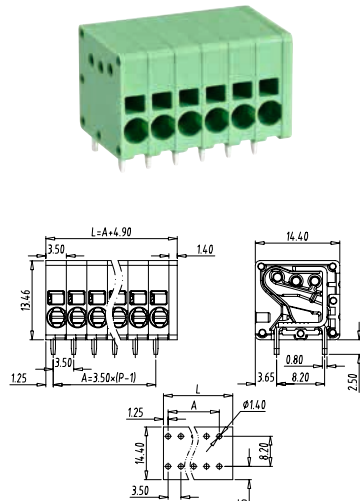

技术数据 Technical data	
Pitch (间距):	3.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	26-16AWG 0.2-1.5mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-012R-02P
:	:
24	TLM-012R-24P


TLM-201R(TLM-301R)

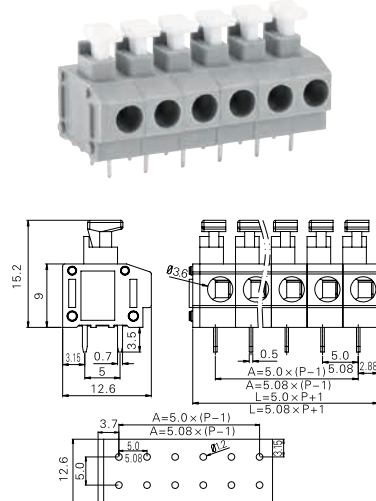

技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL
Rated voltage (电压):	300V 320V 450V
Rated current (电流):	10A 16A
Wire range (线径):	20-14AWG 0.34-1.5mm ² sol / str 1.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.2mm


料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-201R-02P(TLM-301 R-02P)
:	:
24	TLM-201 R-24P(TLM-301 R-24P)

TLM-202R(TLM-302R)

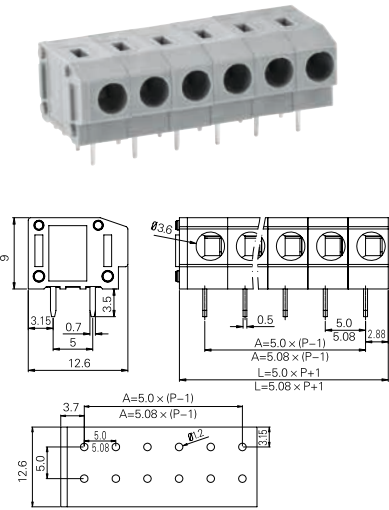


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V 450V
Rated current (电流):	10A 16A
Wire range (线径):	20-14AWG 0.34-1.5mm ² sol / str 1.5mm ² 2.5mm ² sol
PCB holeDia(PCB 直径):	Φ 1.2mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-202R-02P(TLM-302R-02P)
:	:
24	TLM-202R-24P(TLM-302R-24P)

TLM-203(TLM-303)

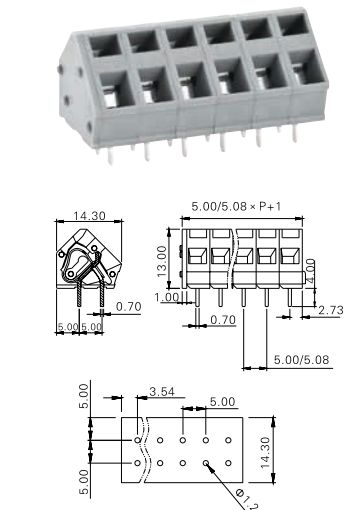


技术数据 Technical data	
Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voKage (电压):	300V 320V
Rated current (电流):	15A 16A
Wire range (线径):	28-12AWG 2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.2mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-203-02P(TLM-303-02P)
:	:
24	TLM-203-24P(TLM-303-24P)

TLM-203B-5.0

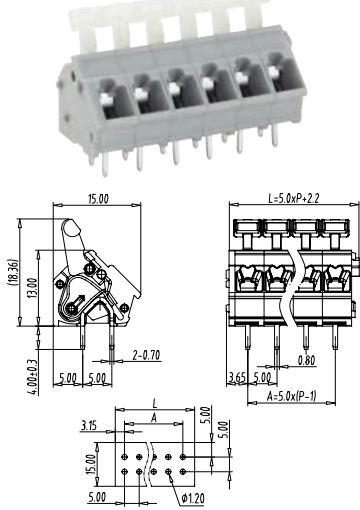


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	
Rated voKage (电压):	300V 320V
Rated current (电流):	15A 16A
Wire range (线径):	28-12AWG 0.2-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.2mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-203B-5.0-02P
:	:
24	TLM-203B-5.0-24P

TLM-210A(TLM-210A-9999)

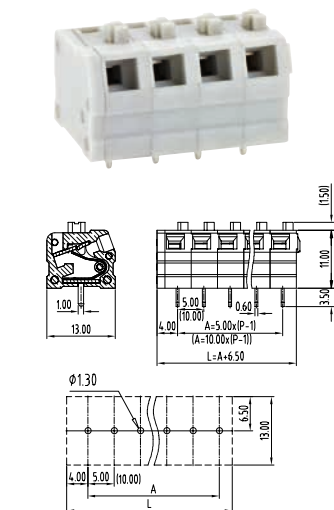


技术数据 Technical data	
Pitch (间距):	5.00mm(10.00mm)
Approval (认证):	UL(Applying)
Rated voltage (电压):	300V(600V)
Rated current (电流):	10A
Wire range (线径):	22-14AWG
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-210A-02P(TLM-210A-9999-02P)
:	:
12	TLM-210A-24P(TLM-21 0A-9999-12P)

TLM-210B(TLM-210B-9999)

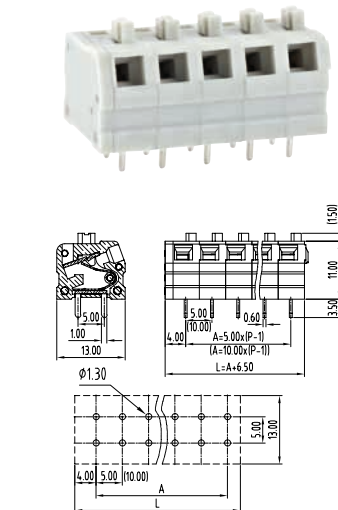


技术数据 Technical data	
Pitch (间距):	5.00mm(10.00mm)
Approval (认证):	UL(Applying)
Rated voltage (电压):	300V(600V)
Rated current (电流):	10A
Wire range (线径):	22-14AWG
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-210B-02P(TLM-210B-9999-02P)
:	:
12	TLM-210B-02P(TLM-210B-9999-12P)

TLM-211

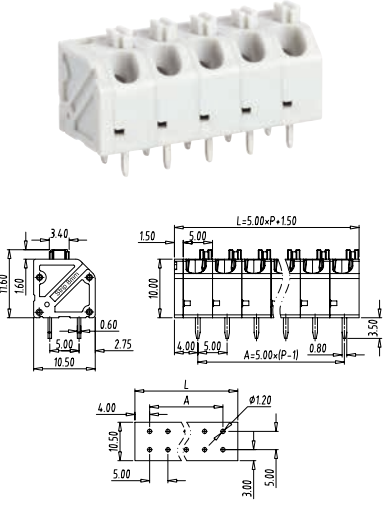


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	13.5A 17.5A
Wire range (线径):	26-14AWG 0.34-1.5mm ²
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-211-02P
:	:
24	TLM-211-24P

TLM-203B-7.5

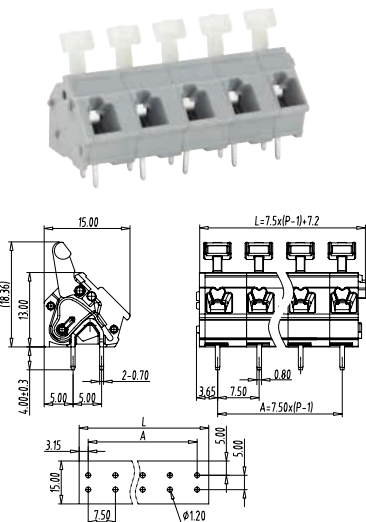


技术数据 Technical data	
Pitch (间距):	7.50mm
Approval (认证):	
Rated voKage (电压):	300V 630V
Rated current (电流):	15A 16A
Wire range (线径):	28-12AWG 0.2-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.2mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-203B-7.5-02P
:	:
24	TLM-203B-7.5-24P

TLM-203B-10.0

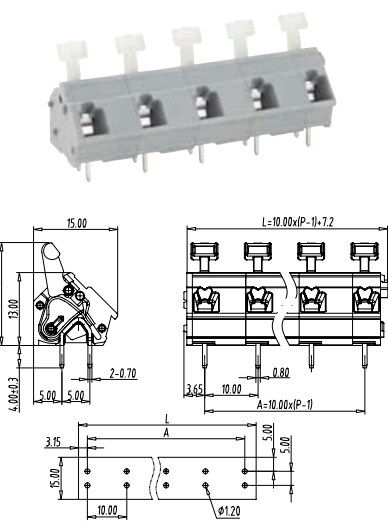


技术数据 Technical data	
Pitch (间距):	10.0mm
Approval (认证):	
Rated voKage (电压):	300V 1000V
Rated current (电流):	15A 16A
Wire range (线径):	28-12AWG 0.2-2.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.2mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-203B-10.0-02P
:	:
24	TLM-203B-10.0-24P

TLM-207

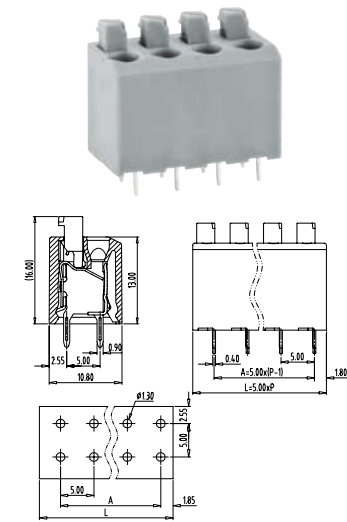


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	10A 10A
Wire range (线径):	20-16AWG 0.5-1.5mm ²
PCB hole Dia(PCB 直径):	Φ 1.3mm
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM207-02P
:	:
24	TLM207-24P

TLM-212V

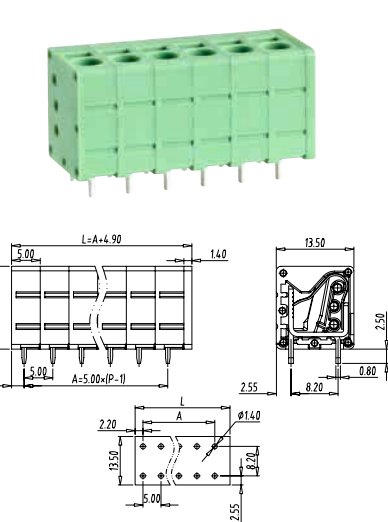


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	26-12AWG 0.2-2.5mm ² sol / str 4mm ² sol
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-212V-02P
:	:
24	TLM-212V-24P

TLM-212R

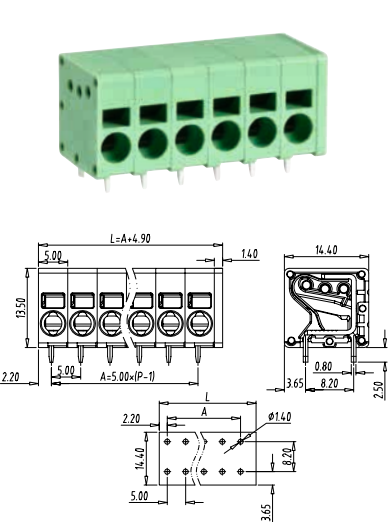


技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	26-12AWG 0.2-2.5mm ² sol / str 4mm ² sol
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-212R-02P
:	:
24	TLM-212R-24P

TLM-213

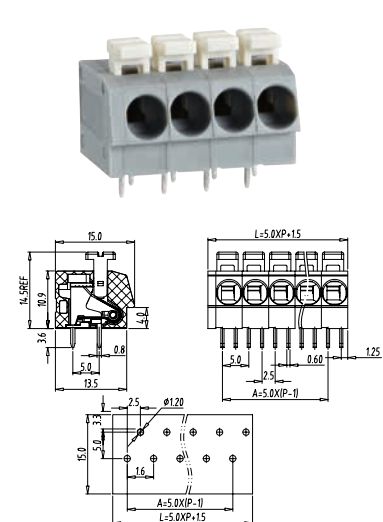

技术数据 Technical data	
Pitch (间距):	5.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	20-12AWG 0.2-2.5mm ²
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-213-02P
:	:
24	TLM-213-24P


TLM-704RA

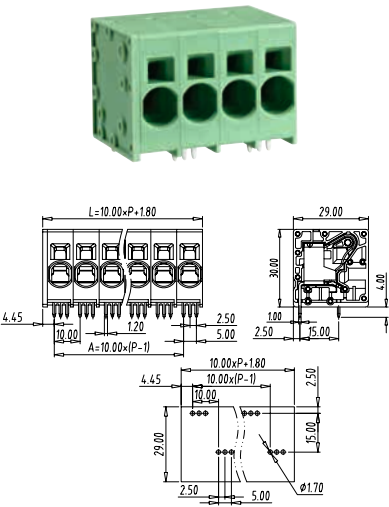

技术数据 Technical data		
Pitch (间距):	10.0mm	
Approval (认证):	 	VDE(Applying)
Rated voltage (电压):	600V	1000V
Rated current (电流):	66A	76A
Wire range (线径):	20-4AWG	0.75-16mm ²

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-704RA-02P
:	:
12	TLM-704RA-12P


TLM-900V

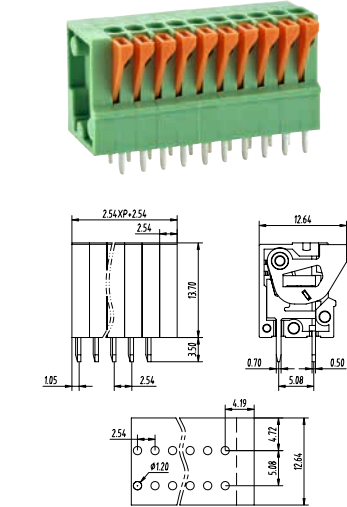

技术数据 Technical data		
Pitch (间距):	2.54mm	
Approval (认证):	 	
Rated voltage (电压):	150V	130V
Rated current (电流):	2A	
Wire range (线径):	26-20AWG	1mm ²
PCB hole Dia(PCB 直径):	Φ 1.2mm	

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-900V-02P
:	:
24	TLM-900V-24P

TLM-900R

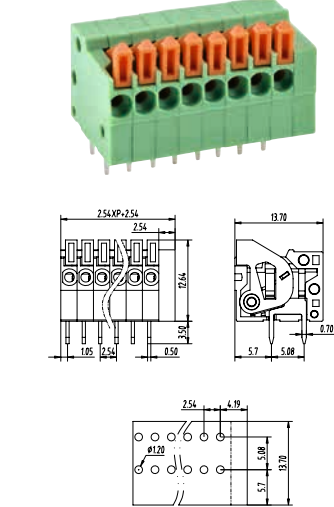

技术数据 Technical data		
Pitch (间距):	2.54mm	
Approval (认证):	 	
Rated voltage (电压):	150V	130V
Rated current (电流):	2A	
Wire range (线径):	26-20AWG	1mm ²
PCB hole Dia(PCB 直径):	Φ 1.2mm	

料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLM-900R-02P
:	:
24	TLM-900R-24P



TLB SERIES-Terminal Strip

How to order

TLB-(H)(W)--P-

Screw: S=Slot screw, C=Cross screw

Color: T=Natural, W=White

Poles

Special code

A=High temperature material

H=High base, W=Wire protector

Series number

Pitch: 1=8.00, 2=10.00, 3=12.00, 4=13.50, 5=14.50, 6=16.50, 7=11.00, 8=14.00, 9=18.50

TLB SERIES-Terminal Strip

ISO9001
ISO14001

REACH

UL US


UL

CE

RoHS


CCC

TLB-100(TLB-100H)

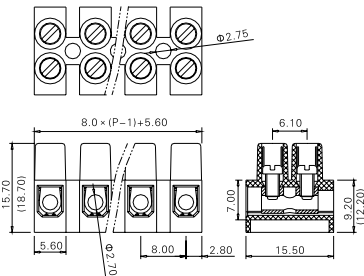


技术数据 Technical data	
Pitch (间距):	8.00mm
Approval (认证):	 
Rated voltage (电压):	300V 450V 450V
Rated current (电流):	20A 32A
Wire range (线径):	24-12AWG 1-4mm ² 4.0mm ²
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
01	TLB-100-01P(TLB-100H-01P)
:	:
12	TLB-100-12P(TLB-100H-12P)

TLB-100W(TLB-100HW)

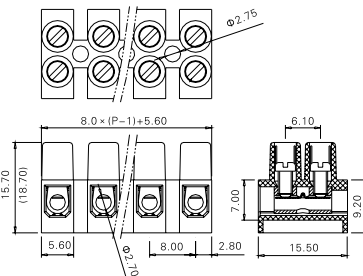


技术数据 Technical data	
Pitch (间距):	8.00mm
Approval (认证):	 
Rated voltage (电压):	300V 450V 450V
Rated current (电流):	20A 24A
Wire range (线径):	24-12AWG Sol 24-14AWG Str 0.75-2.5mm ² 2.5mm ²
Screw (螺丝):	M2.5
料号 Part Number	
极数 (Poles)	型号 (Model)
01	TLB-100W-01P(TLB-100HW-01P)
:	:
12	TLB-100W-12P(TLB-100HW-12P)

TLB-200(TLB-200H)

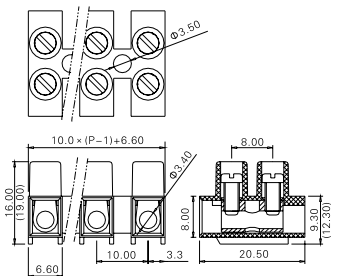


技术数据 Technical data	
Pitch (间距):	10.00mm
Approval (认证):	 
Rated voltage (电压):	300V 450V 450V
Rated current (电流):	30A 41A
Wire range (线径):	22-10AWG 2.5-6mm ² 6mm ²
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLB-200-02P(TLB-200H-02P)
:	:
12	TLB-200-12P(TLB-200H-12P)

TLB-200W(TLB-200HW)

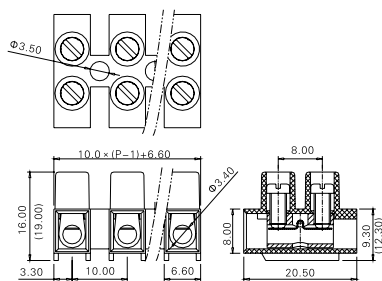


技术数据 Technical data	
Pitch (间距):	10.00mm
Approval (认证):	 
Rated voltage (电压):	300V 450V 450V
Rated current (电流):	30A 32A
Wire range (线径):	22-10AWG 0.75-4mm ² 4.0mm ²
Screw (螺丝):	M3
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLB-200W-02P(TLB-200HW-02P)
:	:
12	TLB-200W-12P(TLB-200HW-12P)

TLB-300(TLB-300H)

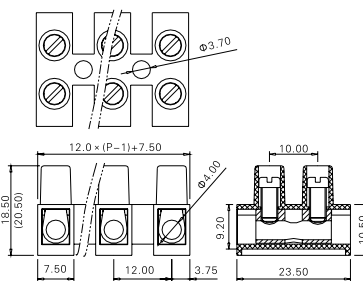

技术数据 Technical data	
Pitch (间距):	12.00mm
Approval (认证):	 
Rated voltage (电压):	300V 750V 750V
Rated current (电流):	30A 57A
Wire range (线径):	22-10AWG 4-10mm ² 10mm ²
Screw (螺丝):	M3.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLB-300-02P(TLB-300H-02P)
:	:
12	TLB-300-12P(TLB-300H-12P)

TLB-300W(TLB-300HW)

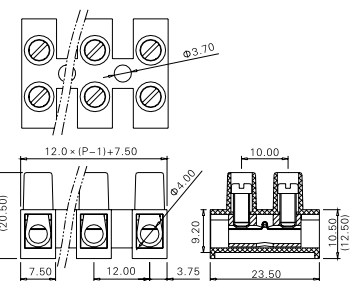


技术数据 Technical data	
Pitch (间距):	12.00mm
Approval (认证):	 
Rated voltage (电压):	300V 750V 750V
Rated current (电流):	30A 41A
Wire range (线径):	22-10AWG 1.5-6mm ² 6.0mm ²
Screw (螺丝):	M3.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLB-300W-02P(TLB-300HW-02P)
:	:
12	TLB-300W-12P(TLB-300HW-12P)

84 www.china-tianli.com


www.china-tianli.com 85

TLB-400

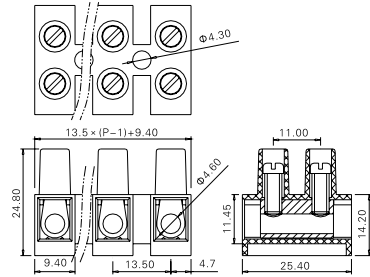


技术数据 Technical data			
Pitch (间距):	13.50mm		
Approval (认证):	UL  CE		
Rated voltage (电压):	300V	750V	750V
Rated current (电流):	50A	76A	
Wire range (线径):	20-8AWG	6-16mm ²	16mm ²
Screw (螺丝):	M4		
料号 Part Number			
极数 (Poles)	型号 (Model)		
02	TLB-400-02P		
:			
12	TLB-400-12P		

TLB-400W

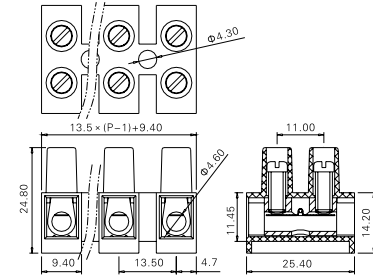


技术数据 Technical data			
Pitch (间距):	13.50mm		
Approval (认证):	 		
Rated voltage (电压):	300V	750V	750V
Rated current (电流):	50A	57A	
Wire range (线径):	20-8AWG	2.5-10mm ²	10mm ²
Screw (螺丝):	M4		
料号 Part Number			
极数 (Poles)	型号 (Model)		
02	TLB-400W-02P		
:			
12	TLB-400W-12P		

TLB-500

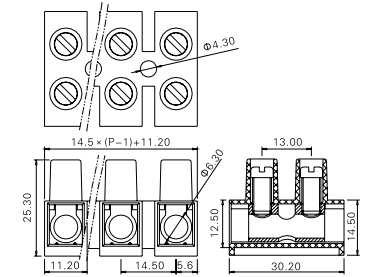


技术数据 Technical data			
Pitch (间距):	14.50mm		
Approval (认证):	 		
Rated voltage (电压):	300V	750V	750V
Rated current (电流):	65A	76A	
Wire range (线径):	6-18AWG	6-16mm ²	16mm ²
Screw (螺丝):	M5		
料号 Part Number			
极数 (Poles)	型号 (Model)		
01	TLB-500-01P		
:			
12	TLB-500-12P		

TLB-100-T(TLB-100H-T)

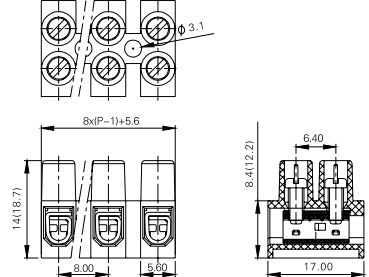


技术数据 Technical data			
Pitch (间距):	8.00mm		
Approval (认证):	 		
Rated voltage (电压):	300V	450V	450V
Rated current (电流):	20A	32A	
Wire range (线径):	24-12AWG	1-4mm ²	1.5mm ²
Screw (螺丝):			
料号 Part Number			
极数 (Poles)	型号 (Model)		
02	TLB-100-T-02P(TLB-100H-T-02P)		
:	:		
12	TLB-100-T-12P(TLB-100H-T-12P)		

TLB-200-T(TLB-200H-T)

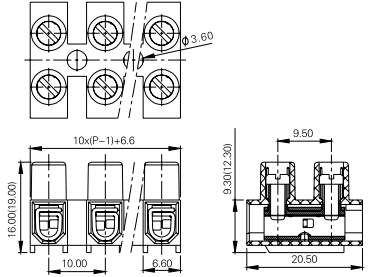


技术数据 Technical data			
Pitch (间距):	10.00mm		
Approval (认证):			
Rated voltage (电压):	300V	450V	450V
Rated current (电流):	30A	41A	
Wire range (线径):	22-10AWG	2.5-6mm ²	2.5mm ²
Screw (螺丝):			
料号 Part Number			
极数 (Poles)	型号 (Model)		
02	TLB-200-T-02P(TLB-200H-T-02P)		
:	:		
12	TLB-200-T-12P(TLB-200H-T-12P)		

TLB-700-1P

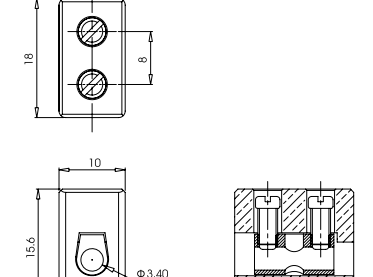


技术数据 Technical data		
Pitch (间距):	—	
Approval (认证):	UL(Applying) VDE(Applying)	
Rated voltage (电压):	300V	450V
Rated current (电流):	20A	32A
Wire range (线径):	22–12AWG	1.5–4.0mm ² Sol 6mm ²
Screw (螺丝):	M3.0	
料号 Part Number		
极数 (Poles)	型号 (Model)	
01	TLB–700–1P	

TLB-500W

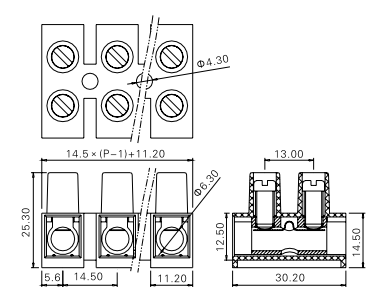


技术数据 Technical data			
Pitch (间距):	14.50mm		
Approval (认证):	 		
Rated voltage (电压):	300V	750V	750V
Rated current (电流):	65A	76A	
Wire range (线径):	6-18AWG	4-16mm ²	16mm ²
Screw (螺丝):	M5		
料号 Part Number			
极数 (Poles)	型号 (Model)		
01	TLB-500W-01P		
:			
12	TLB-500W-12P		

TLB-600

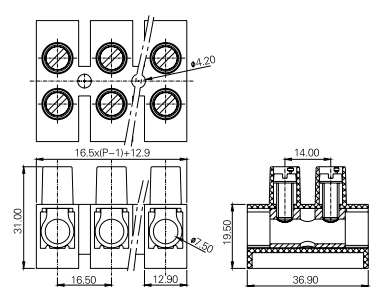


技术数据 Technical data		
Pitch (间距):	16.50mm	
Approval (认证):	 VDE(Applying)	
Rated voltage (电压):	600V	750V
Rated current (电流):	85A	101A
Wire range (线径):	16-4AWG	4-25mm²
Screw (螺丝):	M5	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLB-600-02P	
:	:	
12	TLB-600-12P	

TLB-600W

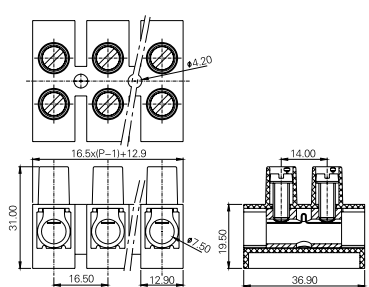


技术数据 Technical data		
Pitch (间距):	16.50mm	
Approval (认证):		VDE(Applying)
Rated voltage (电压):	600V	750V
Rated current (电流):	85A	76A
Wire range (线径):	16-4AWG	4-25mm²
Screw (螺丝):	M5	
料号 Part Number		
极数 (Poles)	型号 (Model)	
02	TLB-600W-02P	
:	:	
12	TLB-600W-12P	

TLB-700-2P

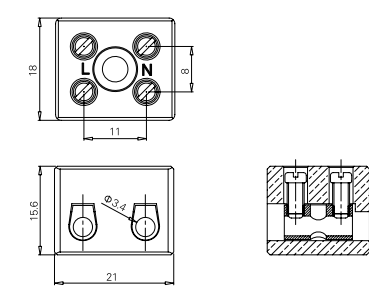


技术数据 Technical data			
Pitch (间距):	11.00mm		
Approval (认证):	UL(Applying) VDE (Applying)		
Rated voltage (电压):	300V	450V	
Rated current (电流):	20A	32A	
Wire range (线径):	22-12AWG	1.5-4.0mm² 6mm² Sol	
Screw (螺丝):	M3.0		
料号 Part Number			
极数 (Poles)	型号 (Model)		
02	TLB-700-2P		

TLB-700-3P

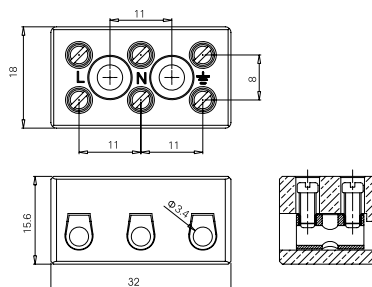


技术数据 Technical data			
Pitch (间距):	11.00mm		
Approval (认证):	UL(Applying) VDE(Applying)		
Rated voltage (电压):	300V	450V	
Rated current (电流):	20A	32A	
Wire range (线径):	22-12AWG	1.5-4.0mm² 6mm² Sol	
Screw (螺丝):	M3.0		
料号 Part Number			
极数 (Poles)	型号 (Model)		
03	TLB-700-3P		

TLB-700-4P

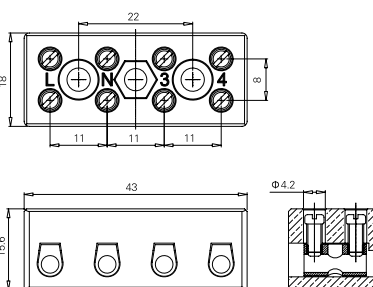


技术数据 Technical data		
Pitch (间距):	11.00mm	
Approval (认证):	UL(Applying) VDE(Applying)	
Rated voltage (电压):	300V	450V
Rated current (电流):	20A	32A
Wire range (线径):	22-12AWG	1.5-4.0mm² 6mm² Sol
Screw (螺丝):	M3.0	
料号 Part Number		
极数 (Poles)	型号 (Model)	
04	TLB-700-4P	

TLB-800-1P

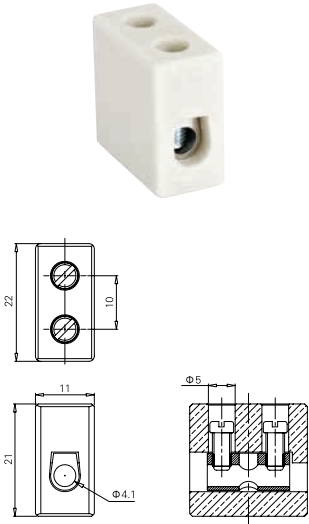


技术数据 Technical data	
Pitch (间距):	—
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 750V
Rated current (电流):	30A 41A
Wire range (线径):	22-10AWG 1.5-6.0mm² 10mm² Sol
Screw (螺丝):	M3.5
料号 Part Number	
极数 (Poles)	型号 (Model)
01	TLB-800-1P

TLB-800-2P

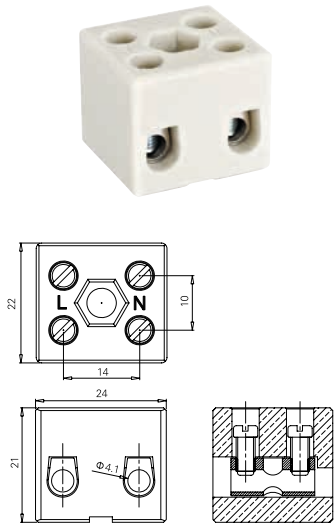


技术数据 Technical data	
Pitch (间距):	14.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 750V
Rated current (电流):	30A 41A
Wire range (线径):	22-10AWG 1.5-6.0mm² 10mm² Sol
Screw (螺丝):	M3.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLB-800-2P

TLB-800-3P

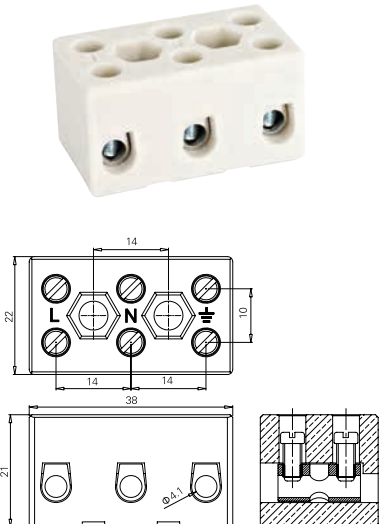


技术数据 Technical data	
Pitch (间距):	14.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 750V
Rated current (电流):	30A 41A
Wire range (线径):	22-10AWG 1.5-6.0mm² 10mm² Sol
Screw (螺丝):	M3.5
料号 Part Number	
极数 (Poles)	型号 (Model)
03	TLB-800-3P

TLB-800-4P

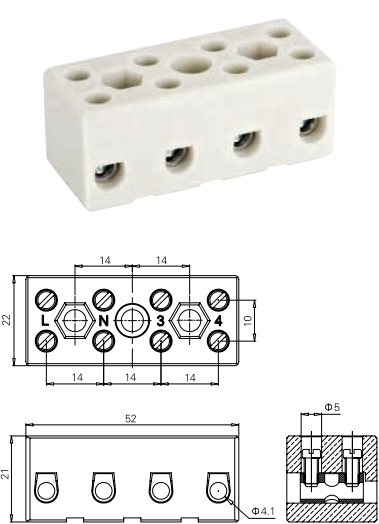


技术数据 Technical data	
Pitch (间距):	14.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 750V
Rated current (电流):	30A 41A
Wire range (线径):	22-10AWG 1.5-6.0mm² 10mm² Sol
Screw (螺丝):	M3.5
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLB-800-4P

TLB-900-2P

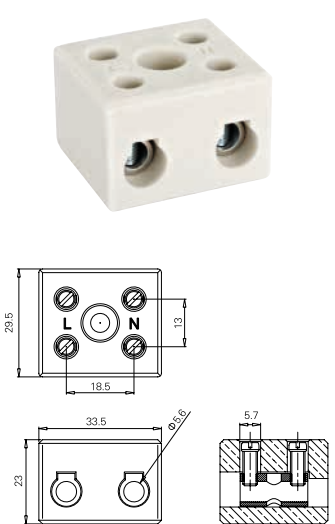


技术数据 Technical data	
Pitch (间距):	18.50mm
Approval (认证):	UL(Applying) VDE (Applying)
Rated voltage (电压):	600V 750V
Rated current (电流):	50A 57A
Wire range (线径):	18-8AWG 2.5-10mm² 16mm² Sol
Screw (螺丝):	M4.0
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLB-900-2P

TLB-900-3P

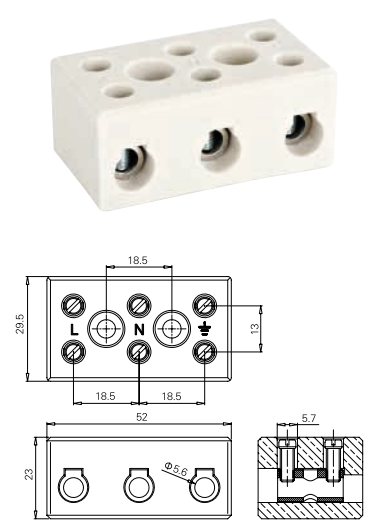


技术数据 Technical data	
Pitch (间距):	18.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 750V
Rated current (电流):	50A 57A
Wire range (线径):	18-8AWG 2.5-10mm² 16mm² Sol
Screw (螺丝):	M4.0
料号 Part Number	
极数 (Poles)	型号 (Model)
03	TLB-900-3P

TLB-01

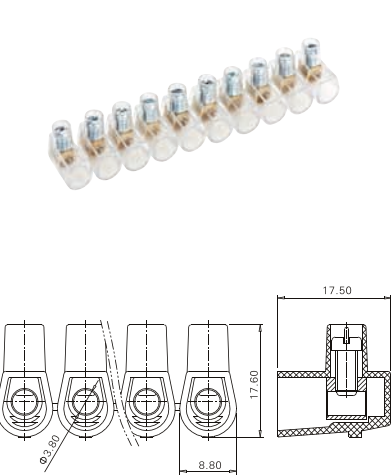


技术数据 Technical data	
Approval (认证):	VDE(Applying)
Rated voltage (电压):	450V
Rated current (电流):	24A
Wire range (线径):	2.5mm²
Screw (螺丝):	M2
料号 Part Number	
极数 (Poles)	型号 (Model)
01	TLB-01-01P
:	:
10	TLB-01-10P

TLB-02

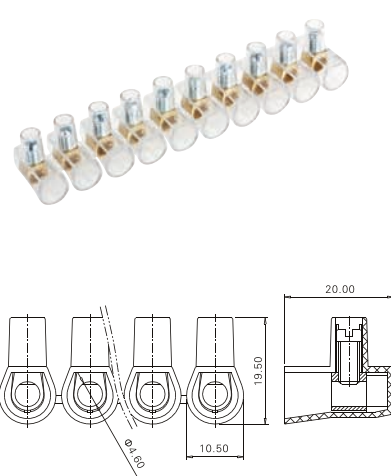


技术数据 Technical data	
Approval (认证):	VDE(Applying)
Rated voltage (电压):	450V
Rated current (电流):	32A
Wire range (线径):	4.0mm²
Screw (螺丝):	M4
料号 Part Number	
极数 (Poles)	型号 (Model)
01	TLB-02-01P
:	:
10	TLB-02-10P

TLB-03

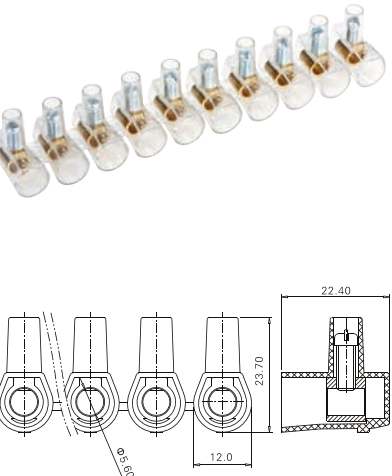


技术数据 Technical data	
Approval (认证):	VDE(Applying)
Rated voltage (电压):	450V
Rated current (电流):	41A
Wire range (线径):	6.0mm²
Screw (螺丝):	M4
料号 Part Number	
极数 (Poles)	型号 (Model)
01	TLB-03-01P
:	:
10	TLB-03-10P

TLB-B001-02P

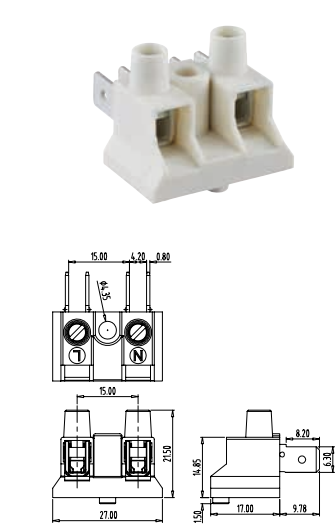


技术数据 Technical data	
Pitch (间距):	15.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	22-12AWG 0.5-4mm²
Screw (螺丝):	M3.5
料号 Part Number	
极数 (Poles)	型号 (Model)
02	TLB-B001-02P

TLB-B001-04P

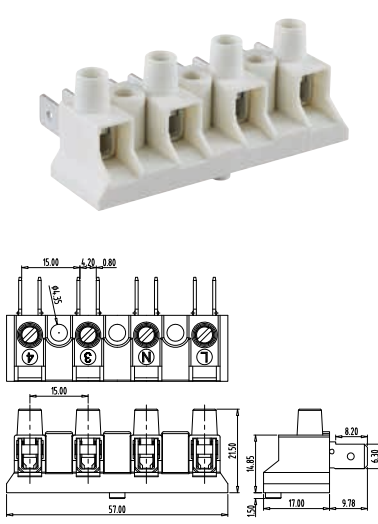


技术数据 Technical data	
Pitch (间距):	15.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	22-12AWG 0.5-4mm²
Screw (螺丝):	M3.5
料号 Part Number	
极数 (Poles)	型号 (Model)
04	TLB-B001-04P


TPK SERIES-Panel Feed-through Terminal Blocks

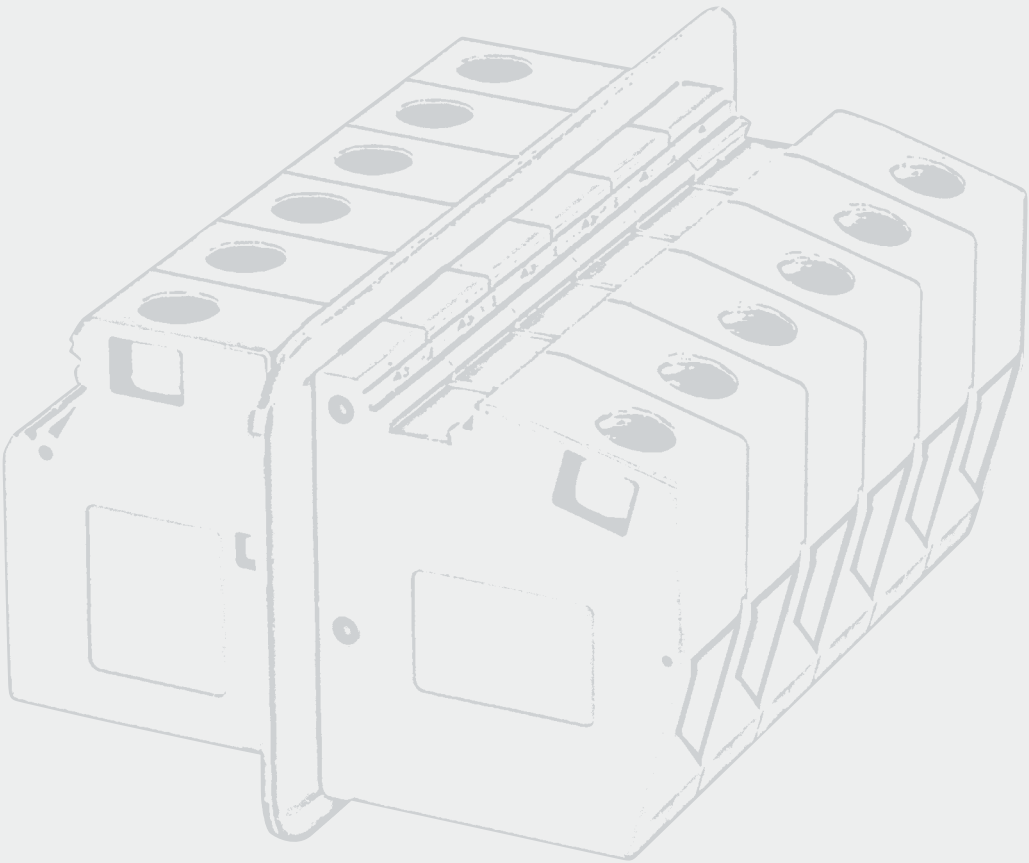

How to order

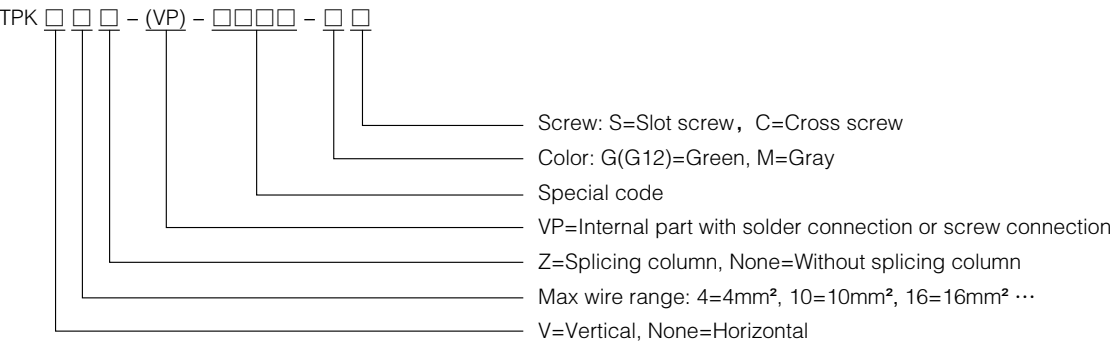


TPK 4

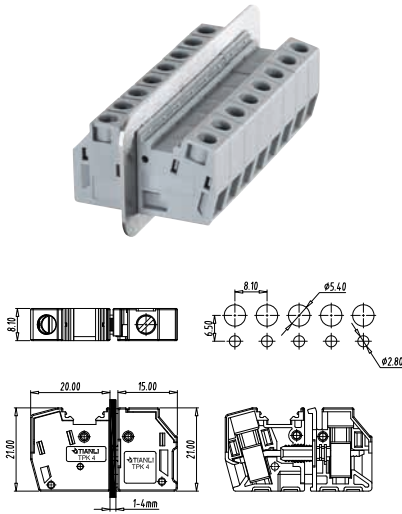


技术数据 Technical data		
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	500V
Rated current (电流):	30A	32A 41A (6mm² sol)
Wire range (线径):	30-10AWG	0.2-4mm² sol / str 6mm² sol
Screw (螺丝):	M3	
料号 Part Number		
型号 (Model)	TPK 4	

TPKV 4

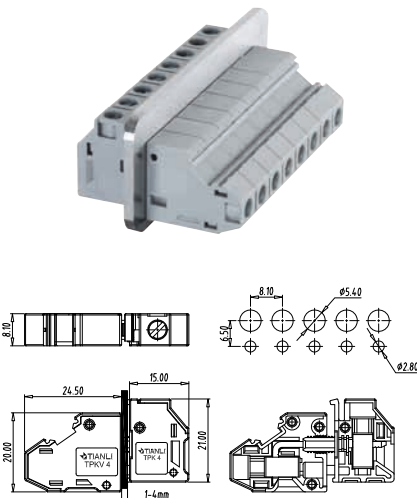


技术数据 Technical data		
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	500V
Rated current (电流):	30A	32A 41A (6mm² sol)
Wire range (线径):	30-10AWG	0.2-4mm² sol / str 6mm² sol
Screw (螺丝):	M3	
料号 Part Number		
型号 (Model)	TPKV 4	

TPK 10

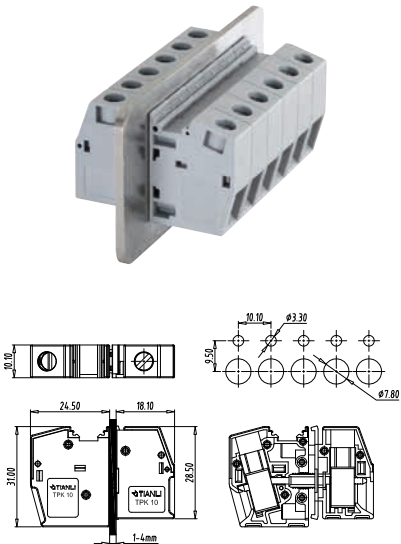


技术数据 Technical data		
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	500V
Rated current (电流):	65A	57A 76A (16mm² sol)
Wire range (线径):	20-6AWG	0.5-10mm² sol / str 16mm² sol
Screw (螺丝):	M4	
料号 Part Number		
型号 (Model)	TPK 10	

TPK 10-VP

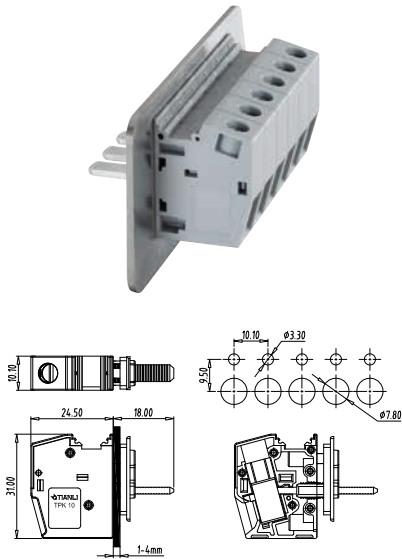


技术数据 Technical data		
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	500V
Rated current (电流):	65A	57A 76A (16mm² sol)
Wire range (线径):	20-6AWG	0.5-10mm² sol / str 16mm² sol
Screw (螺丝):	M4	
料号 Part Number		
型号 (Model)	TPK 10-VP	

TPKV 10

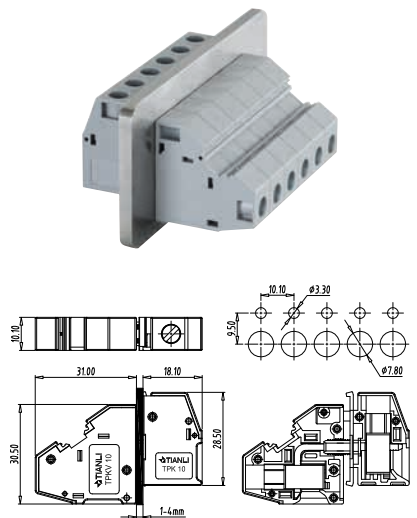


技术数据 Technical data		
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	500V
Rated current (电流):	65A	57A 76A (16mm² sol)
Wire range (线径):	20-6AWG	0.5-10mm² sol / str 16mm² sol
Screw (螺丝):	M4	
料号 Part Number		
型号 (Model)	TPKV 10	

TPKV 10-VP

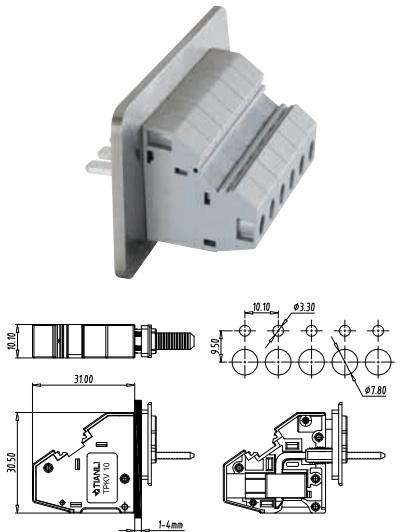


技术数据 Technical data		
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	500V
Rated current (电流):	65A	57A 76A (16mm² sol)
Wire range (线径):	20-6AWG	0.5-10mm² sol / str 16mm² sol
Screw (螺丝):	M4	
料号 Part Number		
型号 (Model)	TPKV 10-VP	

TPK 16

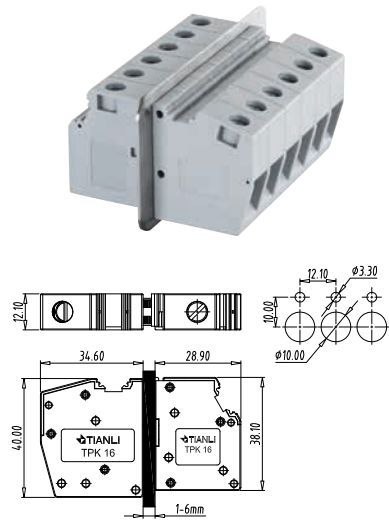


技术数据 Technical data	
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	85A 76A 101A (25mm ² sol)
Wire range (线径):	20-4AWG 0.5-16mm ² sol / str 25mm ² sol
Screw (螺丝):	M5
料号 Part Number	
型号 (Model)	
TPK 16	

TPK 16-VP

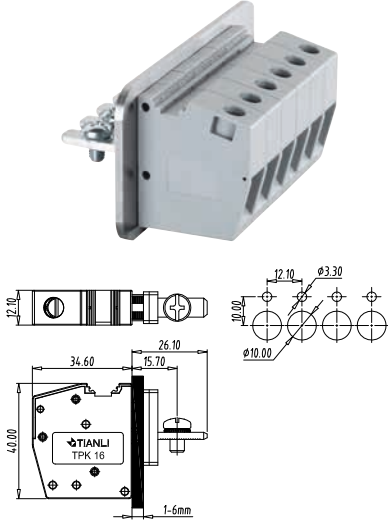


技术数据 Technical data		
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	600V	800V
Rated current (电流):	85A	76A 101A (25mm ² sol)
Wire range (线径):	20–4AWG	0.5–16mm ² sol / str 25mm ² sol
Screw (螺丝):	M5	
料号 Part Number		
型号 (Model)		
TPK 16–VP		

TPKV 16

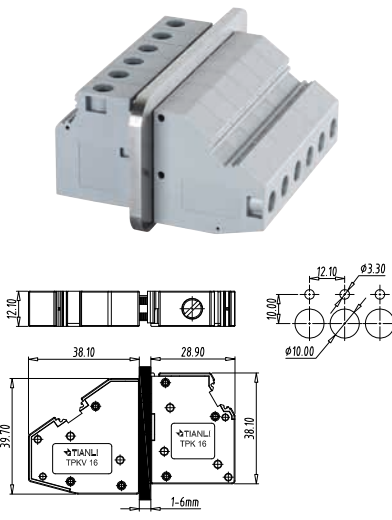


技术数据 Technical data		
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	600V	800V
Rated current (电流):	85A	76A 101A (25mm² sol)
Wire range (线径):	20–4AWG	0.5–16mm² sol / str 25mm² sol
Screw (螺丝):	M5	
料号 Part Number		
型号 (Model)		
TPKV 16		

TPKV 25

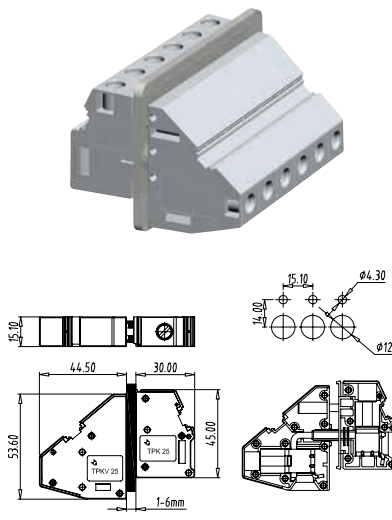


技术数据 Technical data		
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	600V	800V
Rated current (电流):	115A	101A 125A (35mm ² sol)
Wire range (线径):	10-2AWG	6-25mm ² sol / str 35mm ² sol
Screw (螺丝):	M5	
料号 Part Number		
型号 (Model)		
TPKV 25		

TPKV 25-VP

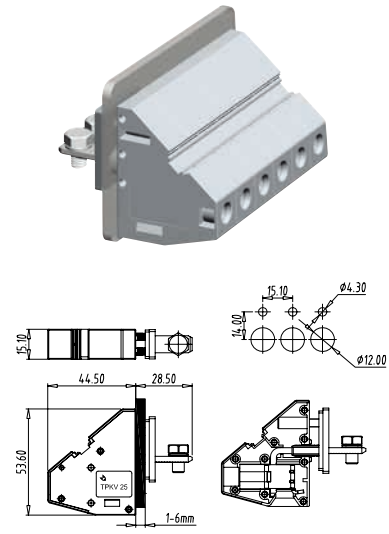


技术参数 Technical data	
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	115A 101A 125A (35mm ² sol)
Wire range (线径):	10-2AWG 6-25mm ² sol / str 35mm ² sol
Screw (螺丝):	M5
料号 Part Number	
型号 (Model)	
TPKV 25-VP	

TPKV 16-VP

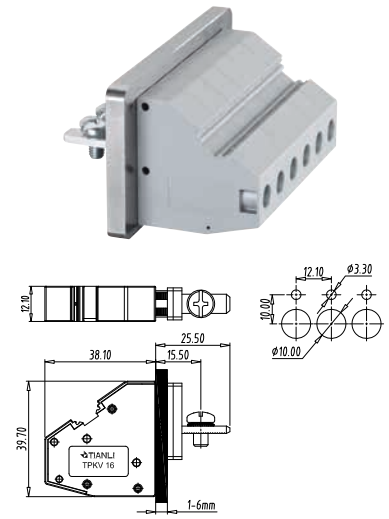


技术数据 Technical data	
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	85A 76A 101A (25mm ² sol)
Wire range (线径):	20–4AWG 0.5–16mm ² sol / str 25mm ² sol
Screw (螺丝):	M5
料号 Part Number	
型号 (Model)	
TPKV 16–VP	

TPK 25

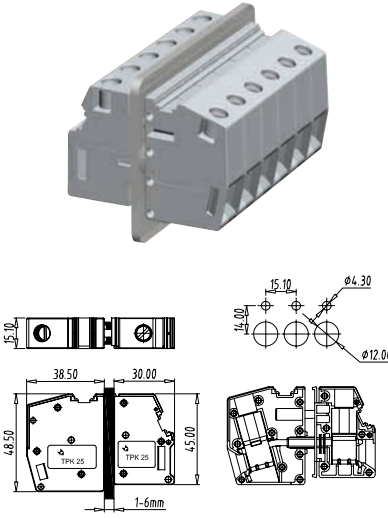

技术数据 Technical data	
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	115A 101A 125A (35mm ² sol)
Wire range (线径):	10–2AWG 6–25mm ² sol / str 35mm ² sol
Screw (螺丝):	M5
料号 Part Number	
型号 (Model)	
TPK 25	

TPK 25-VP

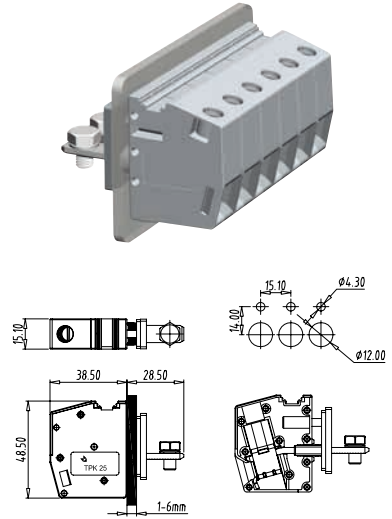


技术数据 Technical data		
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	600V	800V
Rated current (电流):	115A	101A 125A (35mm ² sol)
Wire range (线径):	10–2AWG	6–25mm ² sol / str 35mm ² sol
Screw (螺丝):	M5	
料号 Part Number		
型号 (Model)		
TPK 25–VP		




TLF E/S/W - P-

94 www.china-tianli.com 



ISO9001
ISO14001



TLF-100-01P+TLF-100-01P

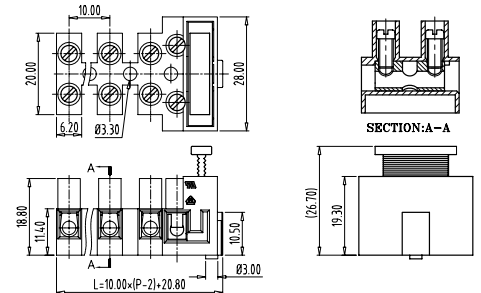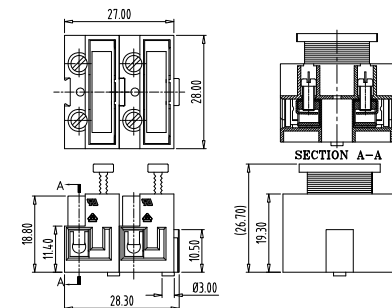


TLF-100-01P+TLF-100(TLF-100E)

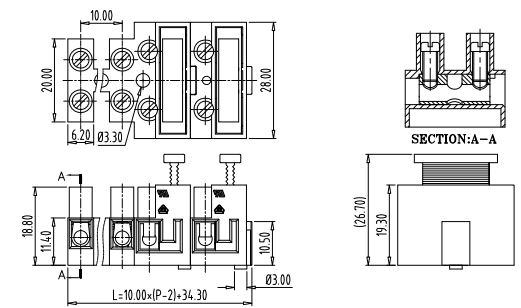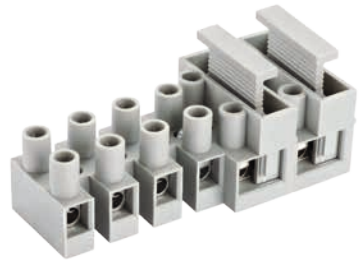


技术数据 Technical data			
Pitch (间距):	10.00mm		
Approval (认证):	 Terminal block 	 Fuse 	
Rated voltage (电压):	300V	450V	300V 250V
Rated current (电流):	30A	24A	13A 6.3A
Wire range (线径):	18–10AWG	0.5–2.5mm ²	20–14AWG 0.5–2.5mm ²
Screw (螺丝):	M3		
型号 (Model)			
TLF–100–01P+TLF–100(TLF–100E)–02P			
:			
TLF–100–01P+TLF–100(TLF–100E)–06P			

FH SERIES - Fuse Holder

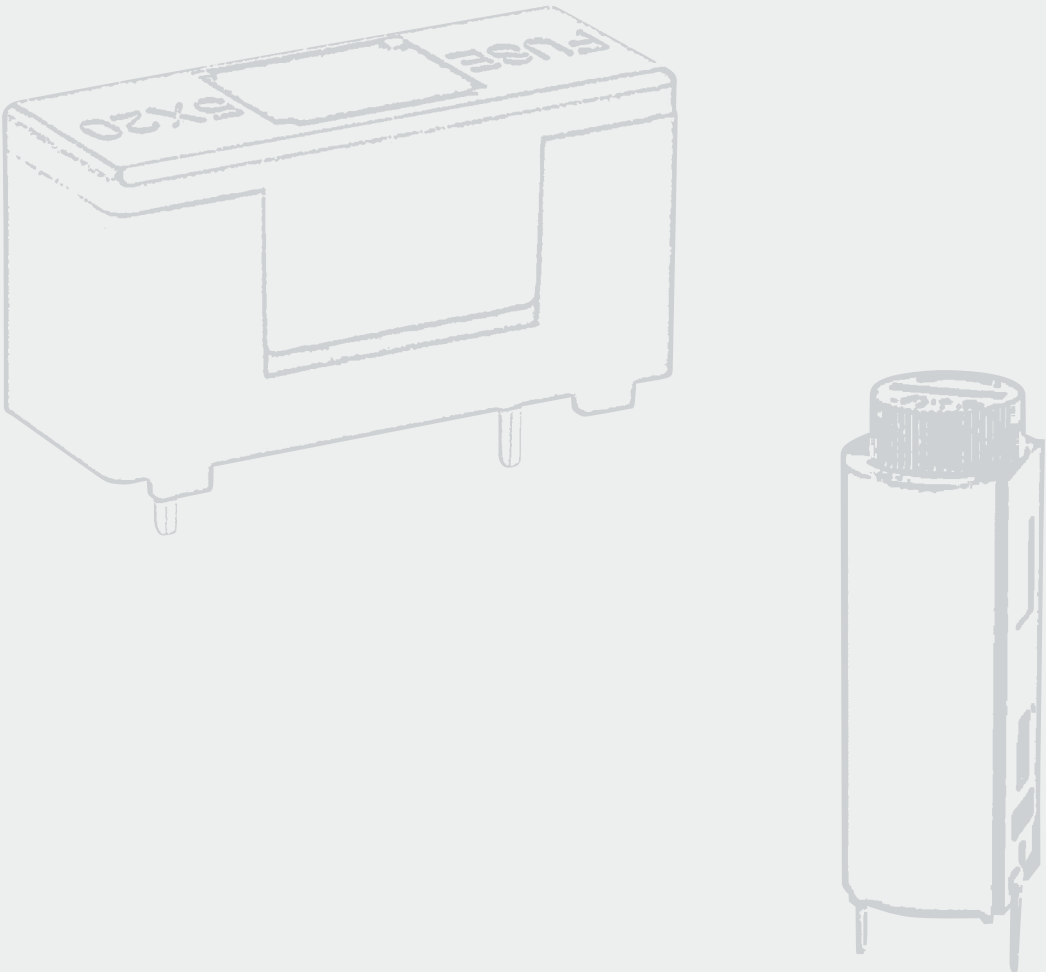


FH-278-A

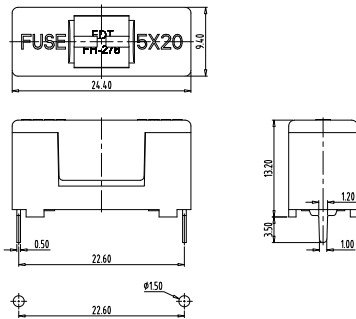


技术数据 Technical data		
Fuse link (保险丝):	Φ 5.0*20	
Approval (认证):	UL	CCC
Rated voltage (电压):	250V	250V
Rated current (电流):	10A	6.3A
Rated Power (功率):	1.6W	

FH-278-NA

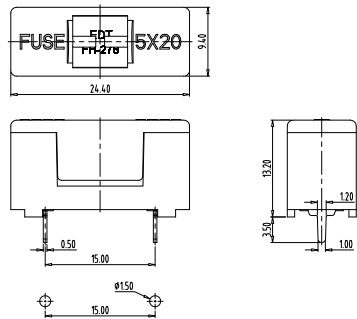


技术数据 Technical data		
Fuse link (保险丝):	Φ 5.0*20	
Approval (认证):	UL	CCC
Rated voltage (电压):	250V	250V
Rated current (电流):	10A	6.3A
Rated Power (功率):	1.6W	

FH-145-A

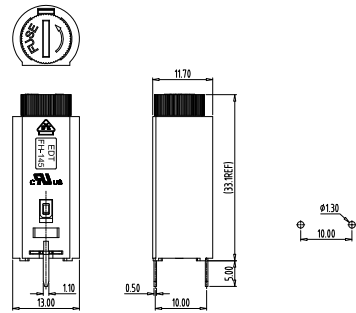



技术数据 Technical data		
Fuse link (保险丝):	Φ 5.0*20	
Approval (认证):	UL	CCC
Rated voltage (电压):	250V	250V
Rated current (电流):	10A	10A
Rated Power (功率):	2.5W	

FH-150-A

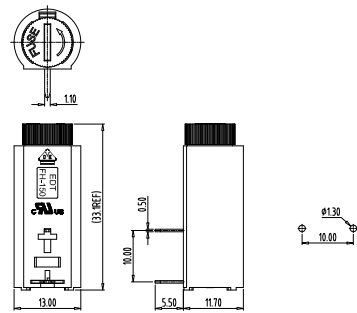


技术数据 Technical data		
Fuse link (保险丝):	Φ 5.0*20	
Approval (认证):	UL	CCC
Rated voltage (电压):	250V	250V
Rated current (电流):	10A	10A
Rated Power (功率):	2.5W	


TQQ & TQS SERIES-Fast connector for PCB

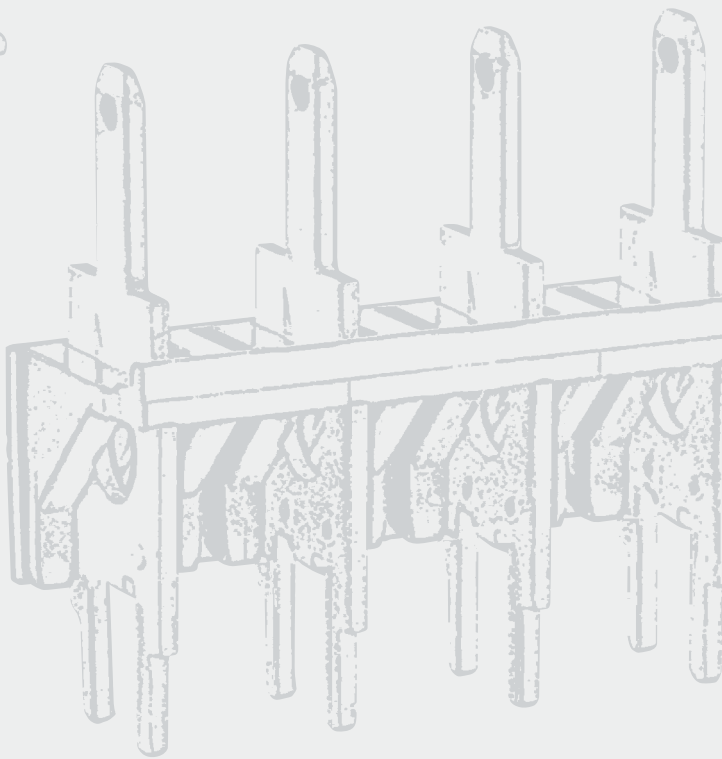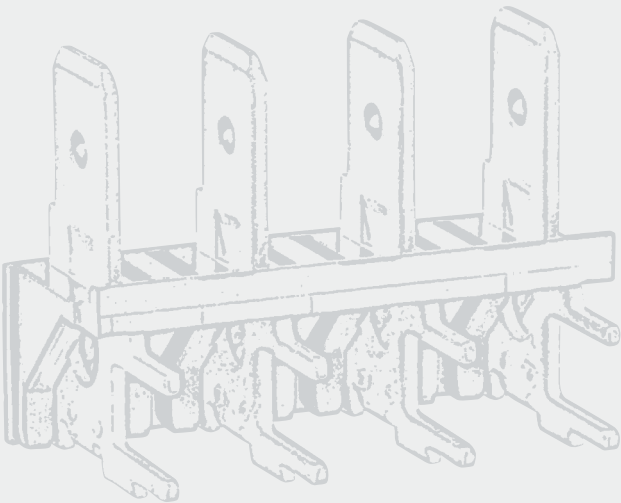

How to order

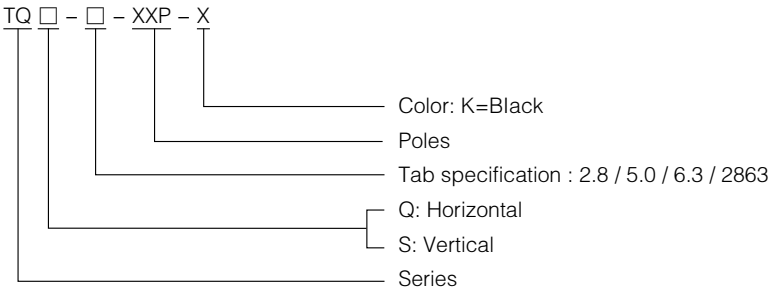

TAB SPECIFICATION



PITCH CODE P

Code/ 代号	A	B	C	D	E
Pitch/P 距	5.08	7.62	10.16	12.70	15.24

TQQ & TQS SERIES-Fast connector for PCB

ISO9001
ISO14001

REACH


UL US

CE

RoHS


CCC

TQQ-A-2.8-XXP-X Pitch 5.08mm
TQQ-B-2.8-XXP-X Pitch 7.62mm
TQQ-C-2.8-XXP-X Pitch 10.16mm
TQQ-D-2.8-XXP-X Pitch 12.70mm
TQQ-E-2.8-XXP-X Pitch 15.24mm

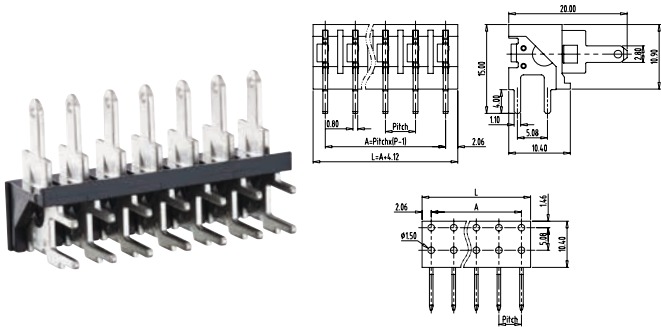


技术数据 Technical data	
Approval (认证):	UL US
Housing (材料):	PC UL94V0
Admissible ambient air temperature (适应温度):	-30°C to 125°C
Wire range (母端子适用线径 AWG):	18AWG
Standard color (标准颜色):	Black
Rated Current (额定电流):	6A
Rated Voltage (额定电压):	300V AC
Product pitch & poles (产品间距及位数):	5.08 (2P~17P) / 7.62 (2P~11P) / 10.16 (2P~9P) / 12.70 (2P~7P) / 15.24 (2P~6P)

TQQ-A-5.0-XXP-X Pitch 5.08mm
TQQ-B-5.0-XXP-X Pitch 7.62mm
TQQ-C-5.0-XXP-X Pitch 10.16mm
TQQ-D-5.0-XXP-X Pitch 12.70mm
TQQ-E-5.0-XXP-X Pitch 15.24mm

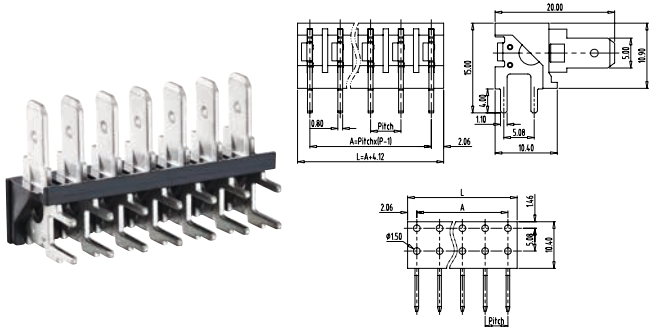


技术数据 Technical data	
Approval (认证):	UL US
Housing (材料):	PC UL94V0
Admissible ambient air temperature (适应温度):	-30°C to 125°C
Wire range (母端子适用线径 AWG):	16AWG
Standard color (标准颜色):	Black
Rated Current (额定电流):	10A
Rated Voltage (额定电压):	300V AC
Product pitch & poles (产品间距及位数):	5.08 (2P~17P) / 7.62 (2P~11P) / 10.16 (2P~9P) / 12.70 (2P~7P) / 15.24 (2P~6P)

TQQ-A-6.3-XXP-X Pitch 5.08mm
TQQ-B-6.3-XXP-X Pitch 7.62mm
TQQ-C-6.3-XXP-X Pitch 10.16mm
TQQ-D-6.3-XXP-X Pitch 12.70mm
TQQ-E-6.3-XXP-X Pitch 15.24mm

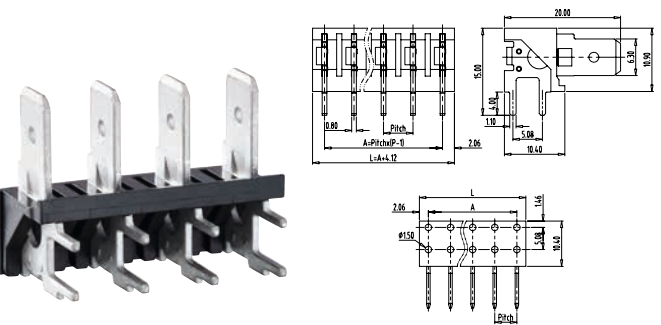


技术数据 Technical data	
Approval (认证):	UL US
Housing (材料):	PC UL94V0
Admissible ambient air temperature (适应温度):	-30°C to 125°C
Wire range (母端子适用线径 AWG):	14AWG
Standard color (标准颜色):	Black
Rated Current (额定电流):	16A
Rated Voltage (额定电压):	300V AC
Product pitch & poles (产品间距及位数):	5.08 (2P~17P) / 7.62 (2P~11P) / 10.16 (2P~9P) / 12.70 (2P~7P) / 15.24 (2P~6P)

TQQ-A-2863-XXP-X Pitch 5.08mm
TQQ-B-2863-XXP-X Pitch 7.62mm
TQQ-C-2863-XXP-X Pitch 10.16mm
TQQ-D-2863-XXP-X Pitch 12.70mm
TQQ-E-2863-XXP-X Pitch 15.24mm

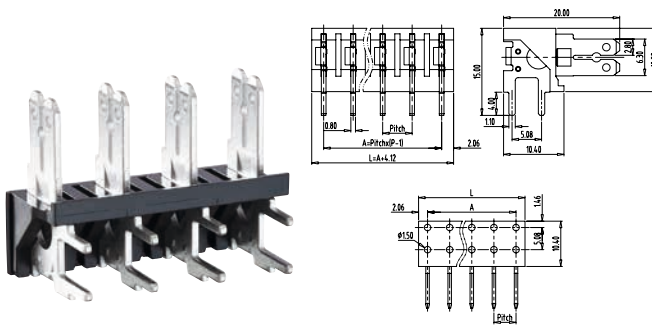


技术数据 Technical data	
Approval (认证):	UL US
Housing (材料):	PC UL94V0
Admissible ambient air temperature (适应温度):	-30°C to 125°C
Wire range (母端子适用线径 AWG):	14AWG
Standard color (标准颜色):	Black
Rated Current (额定电流):	16A
Rated Voltage (额定电压):	300V AC
Product pitch & poles (产品间距及位数):	5.08 (2P~17P) / 7.62 (2P~11P) / 10.16 (2P~9P) / 12.70 (2P~7P) / 15.24 (2P~6P)

TQS-A-2.8-XXP-X Pitch 5.08mm
TQS-B-2.8-XXP-X Pitch 7.62mm
TQS-C-2.8-XXP-X Pitch 10.16mm
TQS-D-2.8-XXP-X Pitch 12.70mm
TQS-E-2.8-XXP-X Pitch 15.24mm

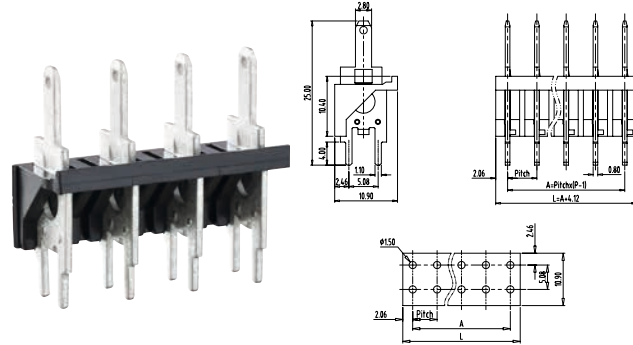


技术数据 Technical data	
Approval (认证):	
Housing (材料):	PC UL94V0
Admissible ambient air temperature (适应温度):	-30°C to 125°C
Wire range (母端子适用线径 AWG):	18AWG
Standard color (标准颜色):	Black
Rated Current (额定电流):	6A
Rated Voltage (额定电压):	300V AC
Product pitch & poles (产品间距及位数):	5.08 (2P~17P) / 7.62 (2P~11P) / 10.16 (2P~9P) 12.70 (2P~7P) / 15.24 (2P~6P)

TQS-A-5.0-XXP-X Pitch 5.08mm
TQS-B-5.0-XXP-X Pitch 7.62mm
TQS-C-5.0-XXP-X Pitch 10.16mm
TQS-D-5.0-XXP-X Pitch 12.70mm
TQS-E-5.0-XXP-X Pitch 15.24mm

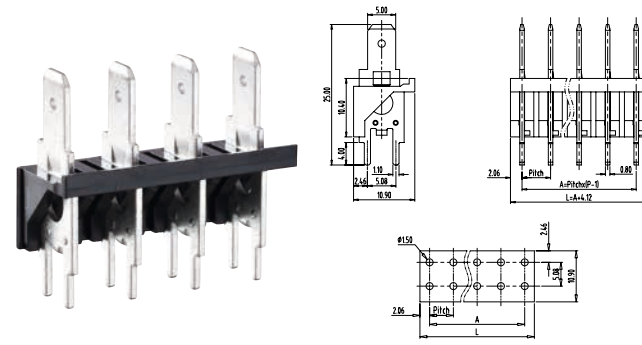


技术数据 Technical data	
Approval (认证):	
Housing (材料):	PC UL94V0
Admissible ambient air temperature (适应温度):	-30°C to 125°C
Wire range (母端子适用线径 AWG):	16AWG
Standard color (标准颜色):	Black
Rated Current (额定电流):	10A
Rated Voltage (额定电压):	300V AC
Product pitch & poles (产品间距及位数):	5.08 (2P~17P) / 7.62 (2P~11P) / 10.16 (2P~9P) 12.70 (2P~7P) / 15.24 (2P~6P)

TQS-A-6.3-XXP-X Pitch 5.08mm
TQS-B-6.3-XXP-X Pitch 7.62mm
TQS-C-6.3-XXP-X Pitch 10.16mm
TQS-D-6.3-XXP-X Pitch 12.70mm
TQS-E-6.3-XXP-X Pitch 15.24mm

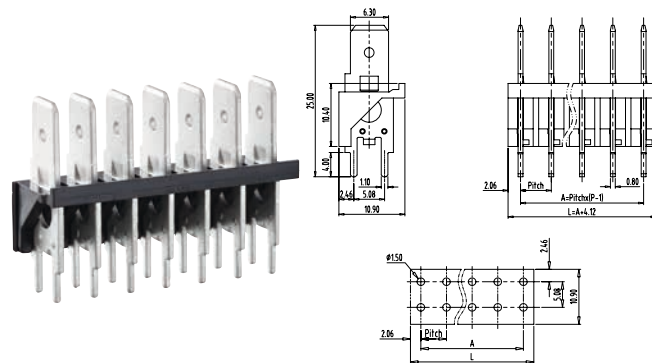

技术数据 Technical data	
Approval (认证):	
Housing (材料):	PC UL94V0
Admissible ambient air temperature (适应温度):	-30°C to 125°C
Wire range (母端子适用线径 AWG):	14AWG
Standard color (标准颜色):	Black
Rated Current (额定电流):	16A
Rated Voltage (额定电压):	300V AC
Product pitch & poles (产品间距及位数):	5.08 (2P~17P) / 7.62 (2P~11P) / 10.16 (2P~9P) 12.70 (2P~7P) / 15.24 (2P~6P)

TQS-A-2863-XXP-X Pitch 5.08mm
TQS-B-2863-XXP-X Pitch 7.62mm
TQS-C-2863-XXP-X Pitch 10.16mm
TQS-D-2863-XXP-X Pitch 12.70mm
TQS-E-2863-XXP-X Pitch 15.24mm

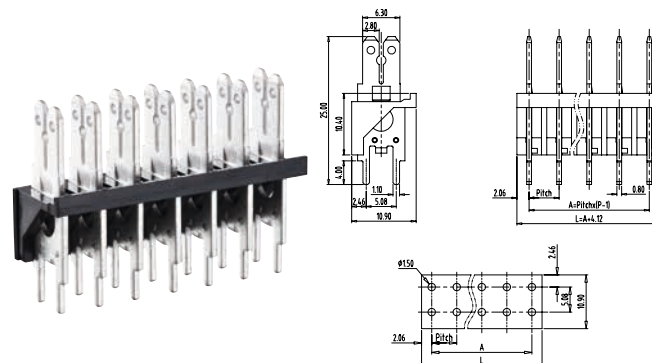

技术数据 Technical data	
Approval (认证):	
Housing (材料):	PC UL94V0
Admissible ambient air temperature (适应温度):	-30°C to 125°C
Wire range (母端子适用线径 AWG):	14AWG
Standard color (标准颜色):	Black
Rated Current (额定电流):	16A
Rated Voltage (额定电压):	300V AC
Product pitch & poles (产品间距及位数):	5.08 (2P~17P) / 7.62 (2P~11P) / 10.16 (2P~9P) 12.70 (2P~7P) / 15.24 (2P~6P)

Customized products

At Tianli, we are continually developing various kinds of products to provide more choices for our customers.


Tianli can also offer the manufacture of special products according to a customer's own design. We have a large Design Department, equipped with the latest design aids, and we also have our own assembly and moulding machinery in-house. Based on these, we can maximumly reduce our development cost.

Because we deem quality as the most important service we can offer to our customers, both the present and future clients can be assured of complete satisfaction.


Terminal Project



Plastic Molding / Injection

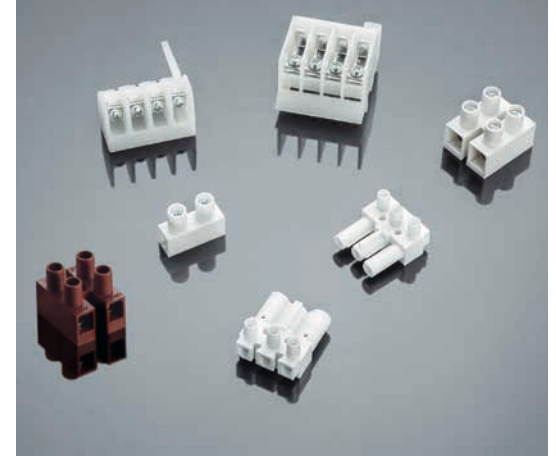

Stamping Project

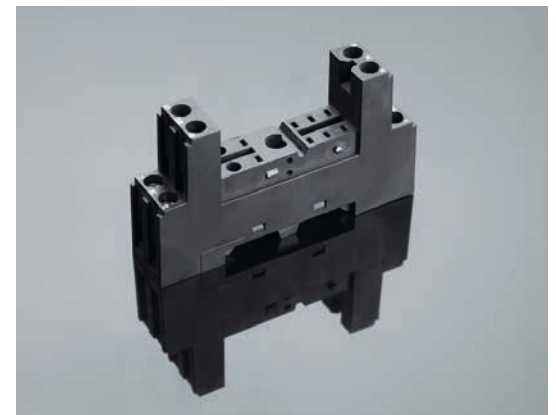

[illegible][illegible]

104 www.china-tianli.com

 www.china-tianli.com 105

Pitch 7.50mm, 7.62mm, 10.16mm, 15.00mm series cross reference list

Plugs 接线母端	PCB Headers 接线公端	TLPH-400V TLPHC-400V TLPH-400R TLPHC-400R	TLPHW-400V TLPHW-400R	TLPH-500V TLPHC-500V TLPH-500R TLPHC-500R	TLPHW-500V TLPHW-500R	TLPHC-501V TLPHC-501R TLPHC-501RL
TLPS-400V		●				
TLPS-400R		●				
TLPS-400RL		●				
TLPSW-400V			●			
TLPSW-400R			●			
TLPSW-400RL			●			
TLPS-500V				●		
TLPS-500R				●		
TLPS-500RL				●		
TLPSW-500V					●	
TLPSW-500R					●	
TLPSW-500RL					●	
TLPS-501						●
TLPSW-501						
TLPS-502				●		
TLPS-800V						
TLPSW-800V						
TLPS-900V						
TLPSW-900V						

TLC series cross reference list

[illegible][illegible][illegible]



Tianli Electrical Machinery (Ningbo) Co., Ltd

天立电机（宁波）有限公司

地址：中国浙江省宁波杭州湾新区庵东工业园区纬三路 138 号

邮编：315327

国内销售：

电话：0574-6347-9600, 6347-9618

传真：0574-6389-7084, 6347-9611

Web: www.china-tianli.com

深圳办事处

地址：深圳市宝安区松岗街道联投东方 PARK 9 座 25C

电话：0755-8612-9295

传真：0755-8612-9295

Web: www.china-tianli.com

Tianli Electrical Machinery (Ningbo) Co., Ltd

ADD: 138, Weisan Rd., Andong Development Zone, Hangzhou Bay Area,
Ningbo, Zhejiang, 315327 China

Export Department:

TEL: +86-574-6347-9600, 6389-6436

FAX: +86-574-6389-7084, 6347-9611

Web: www.china-tianli.com

Shenzhen Office

ADD: 25C, Building A, Liantou East Park, Songgang Street,
Baoan District, Shenzhen, China

TEL: +86-755-8612-9295

FAX: +86-755-8612-9295

Web: www.china-tianli.com