
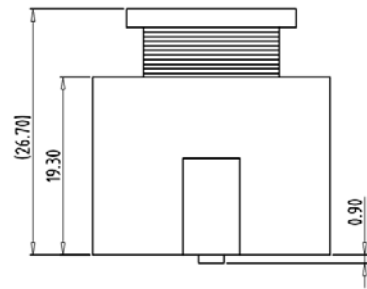



Fuse Terminal Block — TLF series — TLF-100-01P




■ 图示(Pic. shown) : TLF-100-01P-M19S

General.	Fuse Terminal Block	Rated : 250V,6.3A , 2.5mm <sup>2</sup>
	Single row , 01Pole	
	Wire-to-Wire Connection	
	Screw clamp unit: M3, 0.5Nm Max	

认证 ( Approval ) :

■ 技术参数 Technical Data	UL standard			IEC standard		
	UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	--	250V	--
额定电流(Rated current)	13A	--	10A	--	6.3A	--
额定连接容量(Rated connection capacity)	20-14AWG Sol&Str			0.5-2.5mm <sup>2</sup>		
绝缘材料(Insulation Material)	PA66 UL94 V-0					
电流承载部件材料和镀层( Material & Plating of Current carrier )	Copper alloy , Ni plated					
接线弹片材料(Material of Clamp spring )	--					
绝缘电阻(Insulation Resistance)	500MΩ or more at DC500V					
耐电压(1分钟)(Withstanding Voltage/1Min)	2000V					
额定冲击电压(Rated surge voltage)	--					
接线螺丝(Wire clamp unit Screw) , 最大扭矩( torque Max. )	M3 , 0.5Nm Max					
固定螺丝(Mounting Screw) , 扭矩(torque)	--					
剥线长度(Wire stripping length)	7.0mm					
使用温度(Operating temperature)	-30°C up to +40°C					
焊接方式(Soldering recommend)	--					

■ 订购方式(How to order)

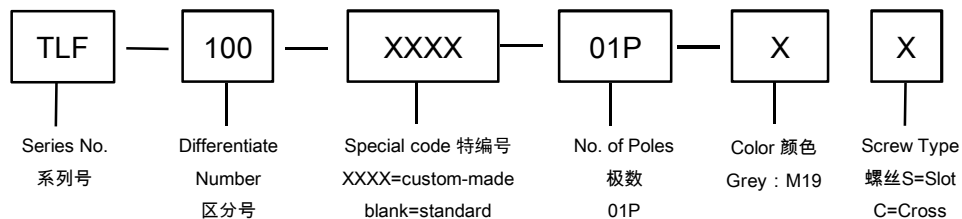

Web:www.china-tianli.com      TEL:+86-574-6347-9600,6389-6436      Mail : sale@china-tianli.cn  
地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号  
ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China