


PCB terminal block — TLM series ( Screwless Type ) — TLM-210B-9999

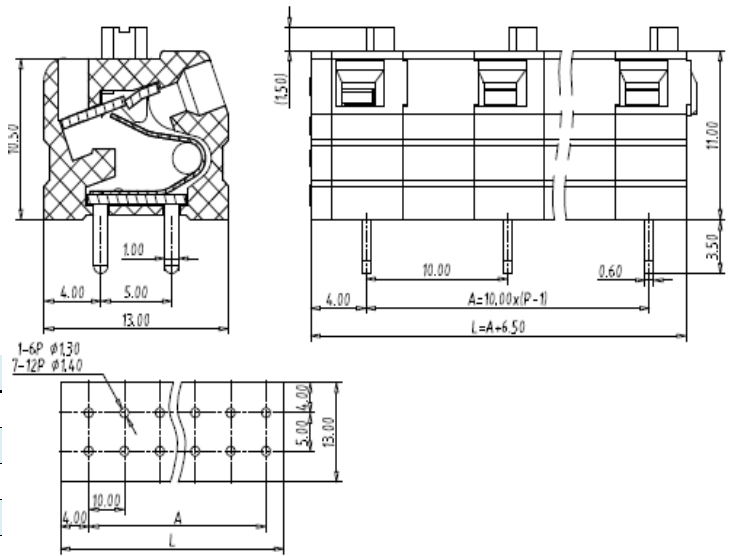


■ 图示(Pic. shown) : TLM-210B-9999-03P-M17

General.	PCB terminal block Rated :1000V,16A 1.5mm <sup>2</sup>
	Single row , 10.00mm pitch , 02-12 Pole
	Wiring orientation:165°(wire-to-board)
	Screwless Type

认证 ( Approval ) :

技术参数 Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	--	1000V	--
额定电流(Rated current)	15A	--	10A	--	16A	--
额定连接容量(Rated connection capacity)	28-14 AWG Sol&Str			0.25-1.5mm <sup>2</sup> Sol&Str		
绝缘材料(Insulation Material)	PA66 UL94 V-0			PA66 UL94 V-0		
电流承载部件材料和镀层( Material & Plating of Current carrier )	Copper alloy , Tin plated			Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring )	Stainless Steel ( GrNi )			Stainless Steel ( GrNi )		
绝缘电阻(Insulation Resistance)	500MΩ or more at DC500V			500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)	2500V			2500V		
额定冲击电压(Rated surge voltage)	--			--		
接线螺丝(Wire clamp unit Screw) , 最大扭矩( torque Max. )	--			--		
固定螺丝(Mounting Screw) , 扭矩(torque)	--			--		
剥线长度(Wire stripping length)	10.0mm			10.0mm		
使用温度(Operating temperature)	-40°C up to +105°C			-40°C up to +105°C		
焊接方式(Soldering recommend)	Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

■ 订购方式(How to order)

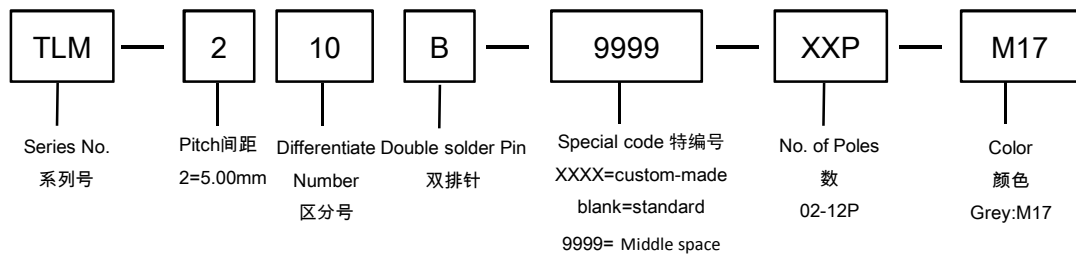

Web:www.china-tianli.com      TEL:+86-574-6347-9600,6389-6436      Mail : sale@china-tianli.cn  
地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号  
ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China