


■ 图示(Pic. shown) : TLCHM-202-03P-M19

General.	Multi Connection System	Rated : 320V, 17.5A
	Single row , 5.00mm pitch , 02-20 Pole	
	Orientation:180°(plug-in to board)	

认证 (Approval) :

技术参数 Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	--	320V	--
额定电流(Rated current)	15A	--	10A	--	17.5A	--
额定连接容量(Rated connection capacity)	--			--		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring)				--		
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)				2000V		
额定冲击电压(Rated surge voltage)				--		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--		
固定螺丝(Mounting Screw) , 扭矩(torque)				--		
剥线长度(Wire stripping length)				9.0mm		
使用温度(Operating temperature)				-33°C up to +105°C		
焊接方式(Soldering recommend)				--		

■ 订购方式(How to order)

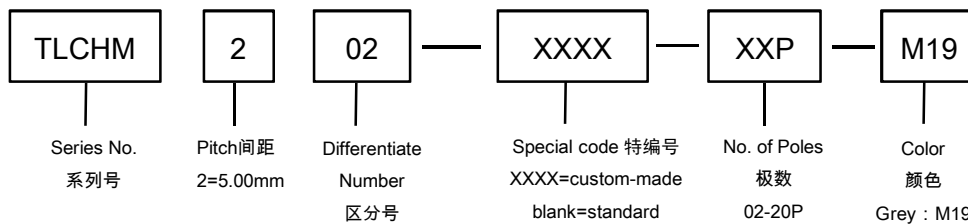


插头 (Female Connector)



P/N : TLCP-200
Wiring orientation :
180°(wire to plug-in)
Rated : 320V,17.5A , 2.5mm²
Spring clamp unit.



P/N : TLCP-200F
Wiring orientation :
180°(wire to plug-in)
Rated : 320V,17.5A , 2.5mm²
Spring clamp unit.



P/N : TLCPM-200
Wiring orientation :
180°(wire to plug-in)
Rated : 320V,17.5A , 2.5mm²
Spring clamp unit.
With mounting flanges



P/N : TLCPM-201
Wiring orientation :
180°(wire to plug-in)
Rated : 320V,17.5A , 2.5mm²
Spring clamp unit.