


RAILMOUNTED TERMINAL BLOCKS — TB30DC-XXP

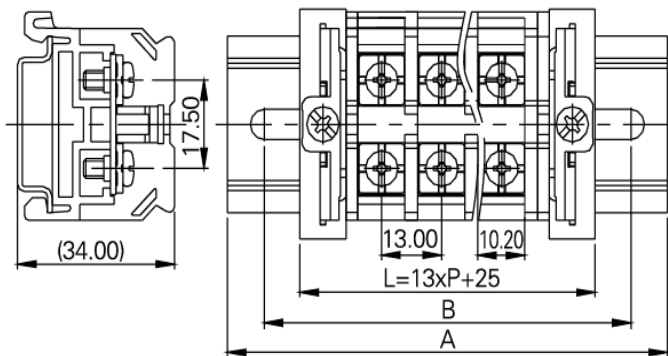

图示(Pic. shown) : TB30DC-05P-K


General: Railmounted terminal Blocks Rated : 600V,30A , 10AWG
Single row , 13.0mm pitch , 02-12 Pole
Wiring orientation: 180°(wire-to-wire)
Screw clamp unit: M4.0, 1.6Nm Max

认证 (Approval) :



| 技术参数 Technical Data | UL standard | | | IEC standard | | |
|--|----------------------|------|----|--|--------|----|
| | UL Application group | | | IEC过电压别/污染等级(IEC overvoltage category /pollution degree) | | |
| UL应用组别(UL Application group) | UL Application group | | | III / 3 | | |
| IEC过电压别/污染等级(IEC overvoltage category /pollution degree) | B | C | D | III / 2 | II / 2 | |
| 额定电压(Rated voltage) | 600V | 600V | -- | -- | -- | -- |
| 额定电流(Rated current) | 30A | 30A | -- | -- | -- | -- |
| 额定连接容量(Rated connection capacity) | 22-10AWG Sol&Str | | | -- | | |
| 绝缘材料(Insulation Material) | | | | PC V2 | | |
| 电流承载部件材料和镀层(Material & Plating of Current carrier) | | | | Copper alloy , Ni plated | | |
| 接线弹片材料(Material of Clamp spring) | | | | -- | | |
| 绝缘电阻(Insulation Resistance) | | | | 500MΩ or more at DC500V | | |
| 耐电压(1分钟)(Withstanding Voltage/1Min) | | | | 2500V | | |
| 额定冲击电压(Rated surge voltage) | | | | -- | | |
| 接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.) | | | | M4.0, 1.6Nm Max | | |
| 固定螺丝(Mounting Screw) , 扭矩(torque) | | | | -- | | |
| 剥线长度(Wire stripping length) | | | | -- | | |
| 使用温度(Operating temperature) | | | | -40°C up to +125°C | | |
| 焊接方式(Soldering recommend) | | | | -- | | |

订购方式(How to order)

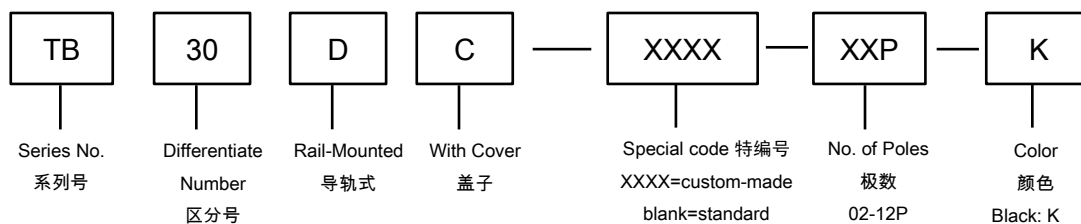

Web:www.china-tianli.com TEL:+86-574-6347-9600,6389-6436 Mail : sale@china-tianli.cn
地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号
ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China

配件 ACCESSORIES FOR MODULAR AND RAIL-MOUNTED SERIES

U1 V1 W1 U2 V2 W2

P/N : TBK10

