
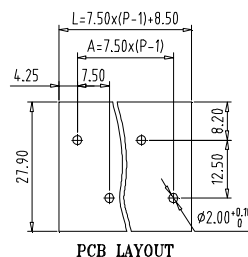
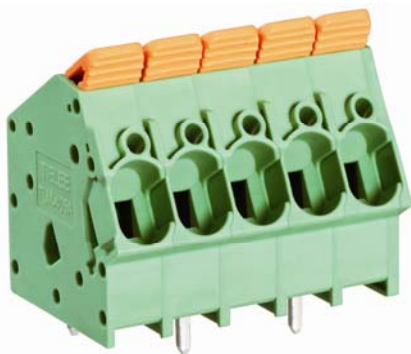




PCB terminal block — TLM series (Screwless Type) — TLM-405AA



PCB LAYOUT

The first PIN
from the left
is BACK

■ 图示(Pic. shown) : TLM-405AA-05P(G12)


General.	PCB terminal block	Rated : 1000V,41A 6mm ²
	Single row , 7.50mm pitch , 02-12 Pole	
	Wiring orientation:30°(wire-to-board)	
	Screwless Type	

认证 (Approval) :



■ 技术参数Technical Data		UL standard			IEC standard		
UL应用组别(UL Application group)		UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		B	C	D			
额定电压(Rated voltage)		600V	600V	600V	1000V	1000V	1000V
额定电流(Rated current)		38A	38A	5A	41A	41A	41A
额定连接容量(Rated connection capacity)		24AWG ~ 8AWG			0.2mm ² ~ 6mm ² &10mm ² (str)		
绝缘材料(Insulation Material)				PA66 UL94 V-0			
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated			
接线弹片材料(Material of Clamp spring)				Stainless Steel (GrNi)			
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V			
耐电压(1分钟)(Withstanding Voltage/1Min)				AC2200V			
额定冲击电压(Rated surge voltage)				8KV			
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--			
固定螺丝(Mounting Screw) , 扭矩(torque)				--			
剥线长度(Wire stripping length)				12~13mm			
使用温度(Operating temperature)				-40°C up to +115°C			
焊接方式(Soldering recommend)		Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

■ 订购方式(How to order)

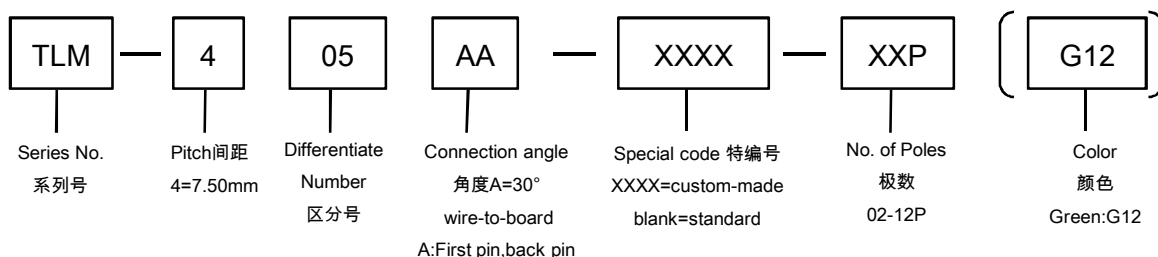

Web:www.tielee.com/www.china-tianli.com/ TEL:+86-574-6347-9600,6389-6436

Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China