


PCB terminal block — TLM series ( Screwless Type ) — TLM-004VT-3.50

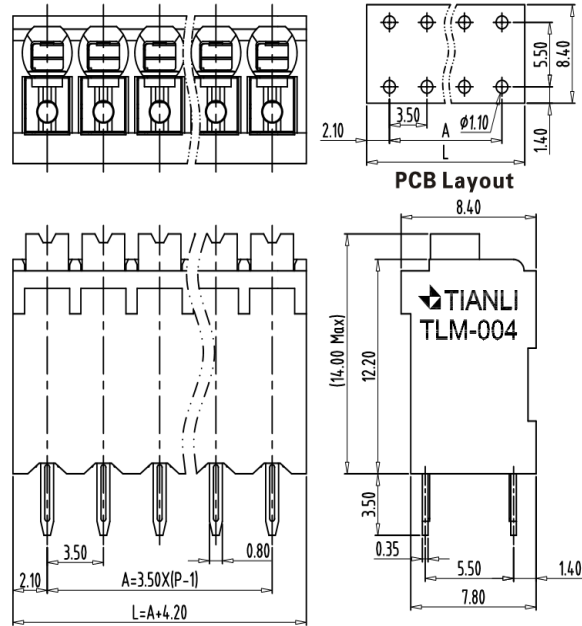


**图示(Pic. shown) : TLM-004VT-3.50-05P-K**

General.  
 PCB terminal block Rated : 160V,17.5A 1.5mm<sup>2</sup>  
 Single row, 3.50mm pitch, 02-24 Pole  
 Wiring orientation: 90°(wire-to-board)  
 Screwless Type

认证 ( Approval )

技术参数 Technical Data	UL standard			IEC standard		
	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	--	160V	--
额定电流(Rated current)	12A	--	10A	--	17.5A	--
额定连接容量(Rated connection capacity)	24-16AWG Sol&Str			0.2~1.5mm <sup>2</sup> Sol&Str		
绝缘材料(Insulation Material)	PAHT UL94 V-0			PAHT UL94 V-0		
电流承载部件材料和镀层( Material & Plating of Current carrier )	Copper alloy , Tin plated			Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring )	Stainless Steel ( GrNi )			Stainless Steel ( GrNi )		
绝缘电阻(Insulation Resistance)	500MΩ or more at DC500V			500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)	1600V			1600V		
额定冲击电压(Rated surge voltage)	--			--		
接线螺丝(Wire clamp unit Screw), 最大扭矩( torque Max. )	--			--		
固定螺丝(Mounting Screw), 扭矩(torque)	--			--		
剥线长度(Wire stripping length)	8.0-9.0mm			8.0-9.0mm		
使用温度(Operating temperature)	-40°C up to +105°C			-40°C up to +105°C		
焊接方式(Soldering recommend)	Reflow soldering ,265°C 30S Max					

**订购方式(How to order)**

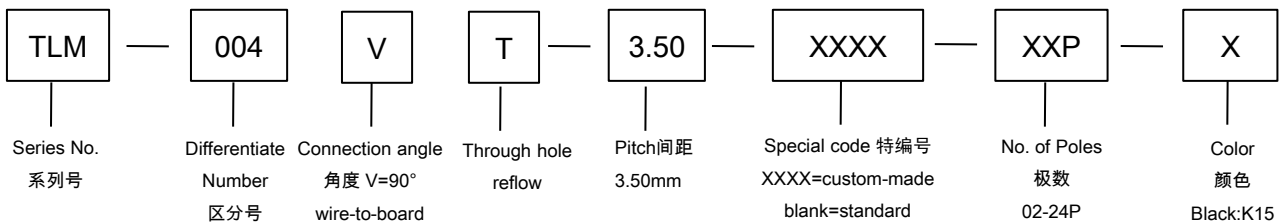

Web:www.china-tianli.com TEL:+86-574-6347-9600,6389-6436 Mail : sale@china-tianli.cn  
 地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号  
 ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China